



2022

Safety is our first priority™



Safety Components For Fall Protection


Catalog # N-2022

YOKE

Catalog # N-2022

Catalog #2022 / 202110 / 215X280

Worldwide Quality Type Approval And Certificate :

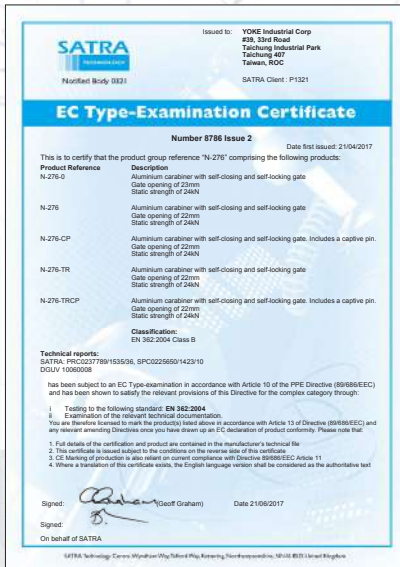

Safety is our first priority TM
 - Quality, Reliability, Innovation -

YOKE

Rope Snaps
 Rebar Hooks



D Rings
 Buckles
 Adjusters



Dielectric
 Components



Aluminum alloy
 & Stainless Steel
 Components



Steel &
 Aluminum alloy
 Carabiners



Rope Grabs



Miscellaneous



Integrated RFID
 Hardware



Strict Manufacturing, Quality Control, and Testing



YOKE operates a consistent production facility with quality control at every manufacturing stage. From raw materials to the completed product, **YOKE's** quality meets or exceeds ANSI, CSA and EN specifications.

YOKE is an ISO 9001 certified company and has Type Approval and audit program with CSA Group Testing & Certification Inc. (Canada) and SATRA Technology Centre Ltd. (England).

Test Certificates are included with every shipment from **YOKE**. These certificates are your assurance of unsurpassed quality.

- **Spectrographic Analysis :**

Ensure proper metallurgy content of all raw materials.

- **Proof Load Testing :**

All safety harness connecting components are 100% proof loaded to 3600 lbs / 16 kN.

- **Ultimate Breaking Load Test :**

Connecting and adjusting components are batch tested for ultimate breaking strength.


- connecting components - exceed 5000 lbs
- adjusting components - exceed 4000 lbs

Certificate of Conformance

Year of manufacture
& batch code links to
Certificate of Conformance

Forged

PT: proof load tested

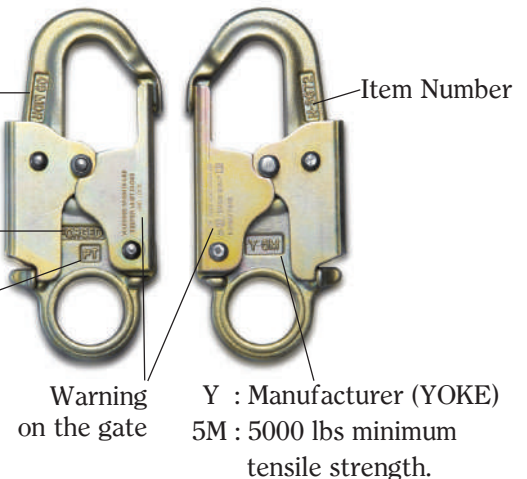

WARNING

YOKE HARDWARE IN THIS CATALOGUE IS DESIGNED FOR PERSONAL FALL PROTECTION AND IS NOT TO BE USED FOR MATERIAL HANDLING




COMPLETE RANGE OF ANSI/CSA CONNECTORS

The ANSI/CSA standard requires connectors with an integral eye to have gate strength (side and face) of 3600 lbs.


It also requires connectors without an integral eye to have all around gate strength of 3600 lbs (side, face and minor axis).

YOKE offers a full range of these ANSI/CSA compliant connectors:


- Snap Hooks
- Swivel Hooks
- Clevis Snap Hooks
- Indicator Swivel Hooks
- Rebar Hooks
- Swivel Rebar Hooks
- Pole Strap Snap Hooks
- Aluminum Rebar Hooks
- Aluminum Snap Hooks

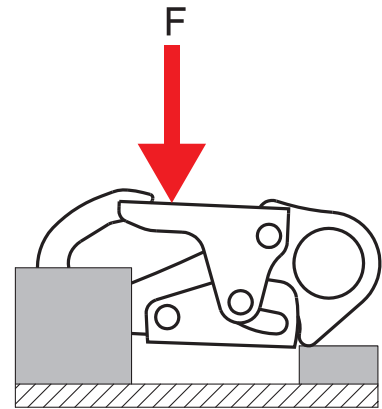

Gate face resistance test

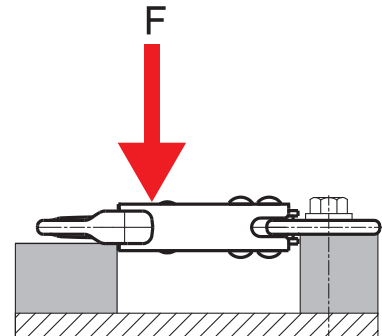

Gate side-load resistance test

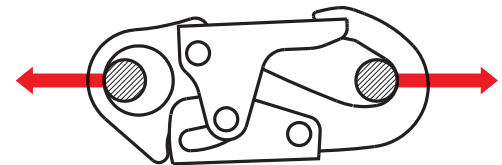

Major axis test



N-3610

Rope Snap Hook 3600 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 13.6 oz. / 388 g

Zinc Plated



mm (inch)

N-3810

Stamped Rope Snap Hook 3600 LBS gate strength

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 12.7 oz. / 362 g

Zinc Plated



mm (inch)

N-3810X

Stamped Rope Snap Hook 3600 LBS gate strength

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 10.6 oz. / 304 g

Zinc Plated

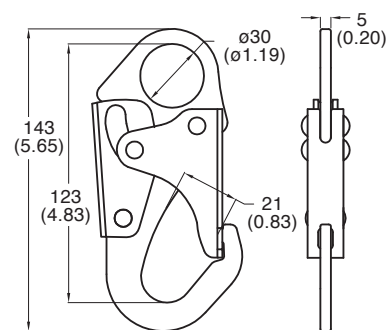

mm (inch)

N-3710

Rope Snap Hook 3600 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 11.7 oz. / 332 g

Zinc Plated



mm (inch)

N-3615

Indicator Swivel Hook 3600 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004


Net weight : 17.5 oz. / 501 g

Indicator Strength Options: ① 500 lbs ② 750 lbs

Zinc Plated



Indicator
activation

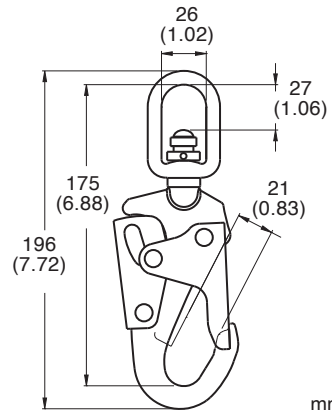

mm (inch)

N-3616

Swivel Hook 3600 LBS gate strength (non-Indicator)

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 17.2 oz. / 490 g

Zinc plated

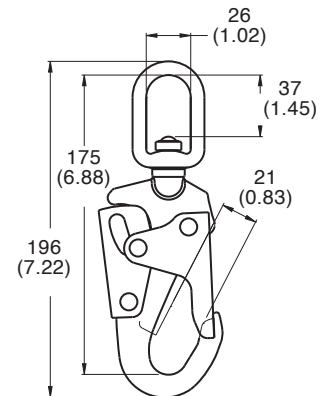

mm (inch)

N-3617

Clevis Snap Hook 3600 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 14.0 oz. / 398 g

Zinc Plated



mm (inch)

N-3618

Tie Back Snap Hook 5000 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 16.0 oz. / 454 g.

Zinc Plated



mm (inch)

N-3658

Pole Strap Snap Hook 3600 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 17.8 oz. / 506 g

Zinc Plated

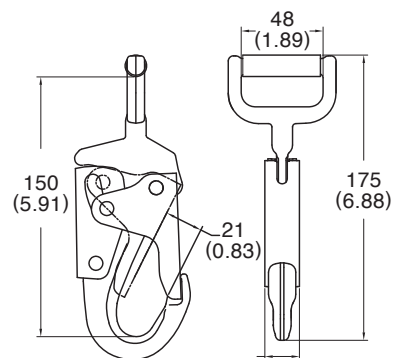

mm (inch)

N-3660

Spreader Snap Hook 3600 LBS gate strength

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 25.4 oz. / 728 g

Zinc Plated

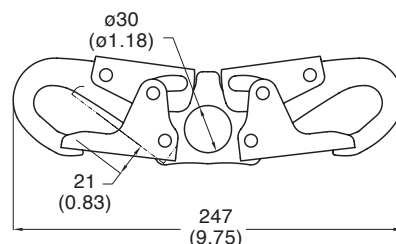

mm (inch)

N-RCT27337

Rebar Chain Assembly

Rebar Hook Gate Opening : 2.55 inch / 64.77 mm

Snap Hook Gate Opening : 0.83 inch / 21.08 mm

Length : 27inch / 685.8 mm

Net weight : 74.1 oz. / 2.1 kg

Zinc Plated



N-3032

Snap Hook


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 10.6 oz. / 303 g



mm (inch)

Zinc Plated

N-315

Stamped Snap Hook


Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 8.4 oz. / 239 g

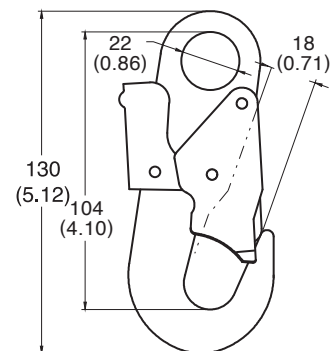

mm (inch)

Zinc Plated

N-315X

Stamped Snap Hook


Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN362 : 2004

Net weight : 7.1 oz. / 200 g

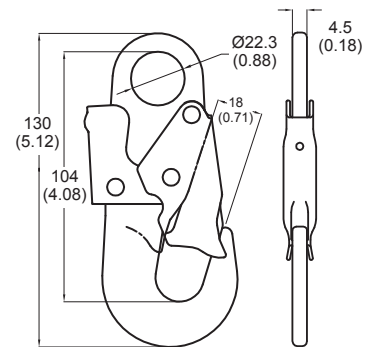

mm (inch)

Zinc Plated

N-306

Stamped Snap Hook


Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 9.7 oz. / 275 g

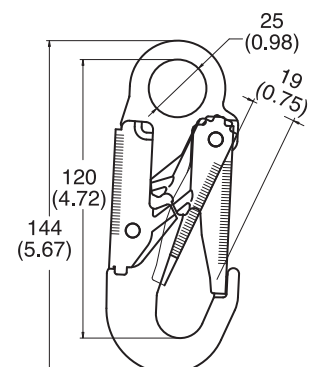

mm (inch)

Zinc Plated

N-3035 Indicator Swivel Snap Hook

Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :


● EN 362 : 2004

Net weight : 13.9 oz. / 394 g

Zinc Plated



Indicator
activation

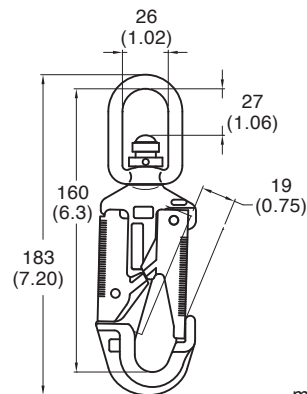

mm (inch)

N-3035 / 0 Swivel Snap Hook (non - Indicator)

Forged steel, heat treated


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● EN 362 : 2004

Net weight : 12.9 oz. / 366 g

Zinc Plated

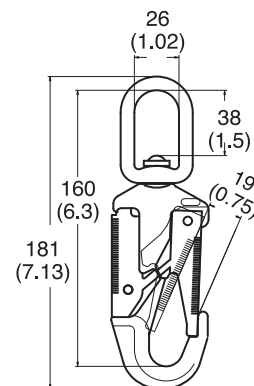

mm (inch)

N-3167 Indicator Swivel Snap Hook

Forged steel, heat treated


Min. Breaking load : 5000 lbs / 23 kN

Meets :


● EN 362 : 2004

Net weight : 13.2 oz. / 377 g

Zinc Plated



Indicator
activation

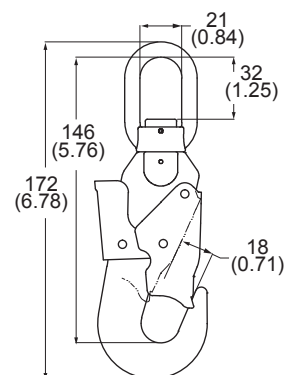

mm (inch)

N-3167 / 0 Swivel Snap Hook (non - Indicator)

Forged steel, heat treated


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● EN 362 : 2004

Net weight : 12.9 oz. / 368 g


Zinc Plated

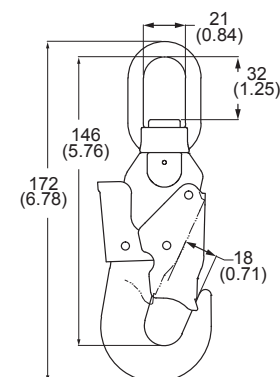

mm (inch)

N-3033 Snap Hook

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 9.7 oz. / 276 g

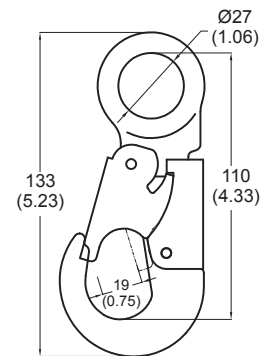


mm (inch)

Zinc Plated

N-3056 Stamped Snap Hook

Sheet steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 9.0 oz. / 256 g

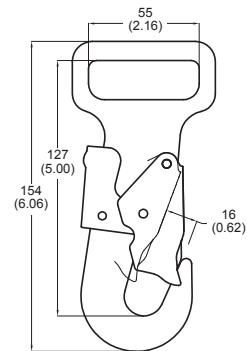


mm (inch)

Zinc Plated

N-3039 Adjustable Slide Pole Hook

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.0 oz. / 170 g

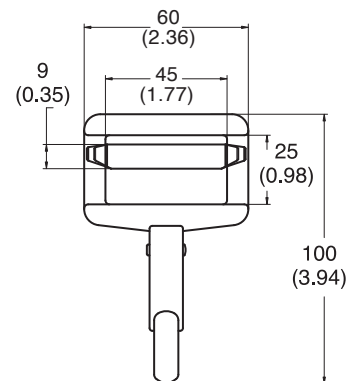


mm (inch)

Zinc Plated

N-3040 Pole Strap Snap Hook

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 4.1 oz. / 115 g




mm (inch)

Zinc Plated

N-3040-1 Pole Strap Snap Hook With Wing Keeper

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 4.0 oz. / 115 g




Zinc Plated

mm (inch)

N-3041 Pole Strap Snap Hook With Wing Keeper

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 10.9 oz. / 310 g

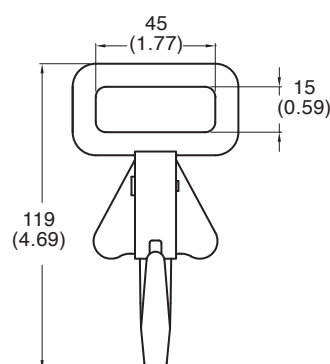


Zinc Plated

mm (inch)

N-3058 Pole Strap Snap Hook

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 14.1 oz. / 396 g

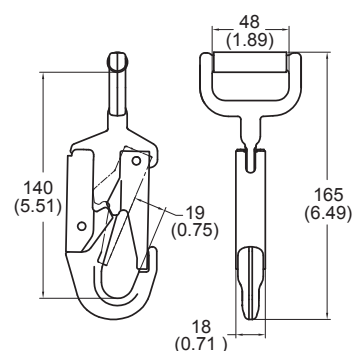


Zinc Plated

mm (inch)

N-3059 Pole Strap Snap Hook

Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 15.5 oz. / 454 g

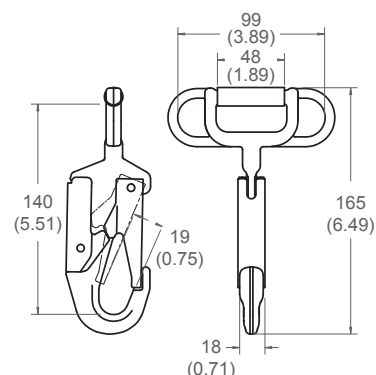

Zinc Plated

mm (inch)


N-3049

Safety Pole Strap Snap

Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 11.4 oz. / 324 g

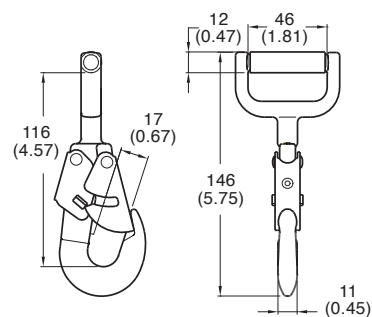

mm (inch)

Zinc Plated

N-3036

Clevis Snap Hook


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 11.5 oz. / 328 g



mm (inch)

Zinc Plated

N-3155

Stamped Snap Hook


Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 8.8 oz. / 250 g

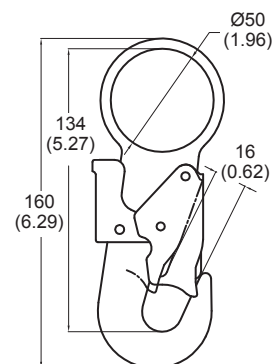

mm (inch)

Zinc Plated

N-3161

Rope Snap Hook


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 9.4 oz. / 268 g



mm (inch)

Zinc Plated


N-3630T

Rebar Hook

3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 28.5 oz. / 800 g

Zinc Plated

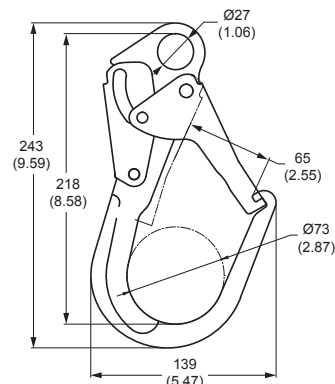

mm (inch)


N-3630TF

Rebar Hook

3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 25.8 oz. / 732 g

Zinc Plated

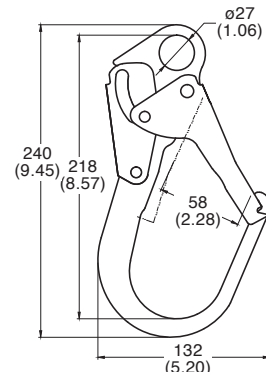

mm (inch)

New


N-3830T

Stamped Rebar Hook

3600 LBS gate / Transverse Load

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 26.3 oz. / 752 g

Zinc Plated

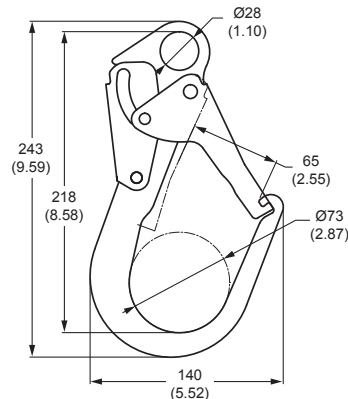

mm (inch)

N-3633T

Indicator Swivel Rebar Hook


3600 LBS gate / Transverse Load

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 30.21 oz. / 823 g

Zinc Plated




Indicator
activation

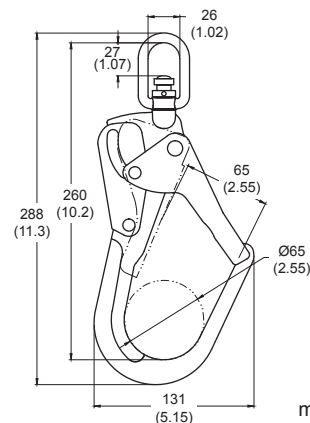

mm (inch)

N-3633T / 0
Swivel Rebar Hook
3600 LBS gate / Transverse Load
(non - Indicator)


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 30.21 oz. / 823 g
Zinc Plated

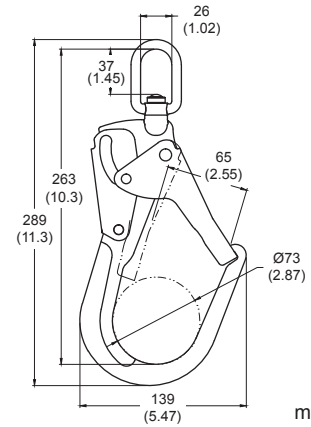

mm (inch)

N-3620T
Ladder Hook
3600 LBS gate / Transverse Load



Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 17.99 oz. / 514 g
Zinc Plated

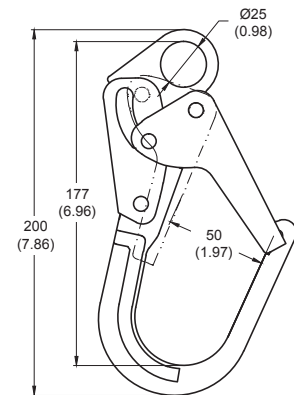

mm (inch)

N-3625T
Indicator Swivel Ladder Hook
3600 LBS gate / Transverse Load


Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 22.5 oz. / 638 g
Zinc Plated

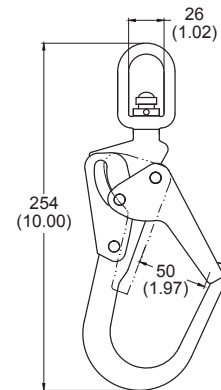

mm (inch)

N-3625T / 0
Swivel Ladder Hook
3600 LBS gate / Transverse Load
(non - Indicator)

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 22.86 oz. / 648 g
Zinc Plated

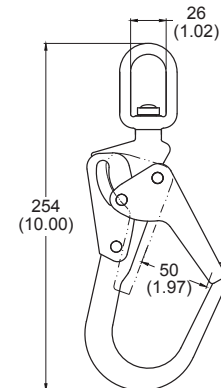

mm (inch)

N-3680

Rebar Hook

3600 LBS gate / Transverse Load

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 34.7 oz. / 984g

Zinc Plated

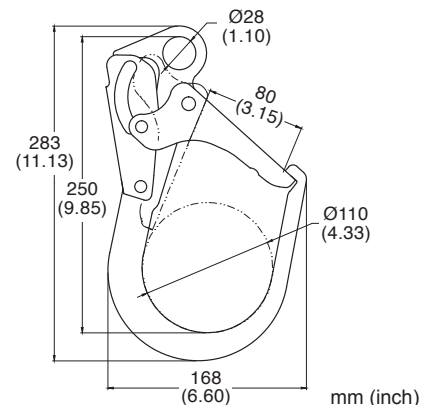

N-314-MX

Rebar Hook

Designed for 2" or small rebar

Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN


Meets :

- EN 362 : 2004

Net weight : 17.6 oz. / 500 g

Part Number	Finish
N-314-ZP	Zinc plated, Polished
N-314-MX	Zinc plated, Matte
N-314-YW	Yellow Zinc plated, Matte

Zinc Plated

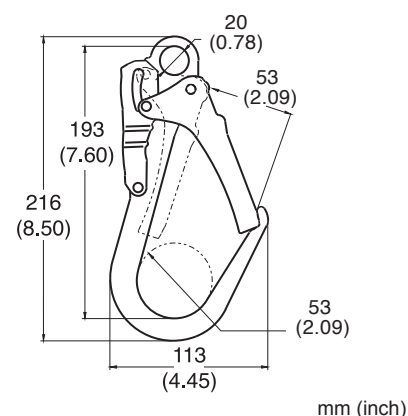

N-326

Rebar Hook

Designed for 2-1 / 4" rebar

Forged steel, heat treated



Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 20.6 oz. / 594 g

Zinc Plated

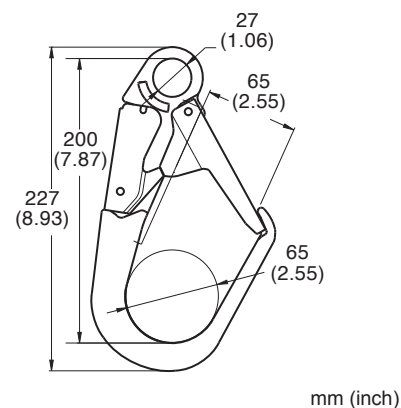

N-325 / 0

Swivel Rebar Hook

Designed for 2-1 / 4" rebar (non-indicator)

Forged steel, heat treated



Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 24.0 oz. / 680 g


Zinc Plated

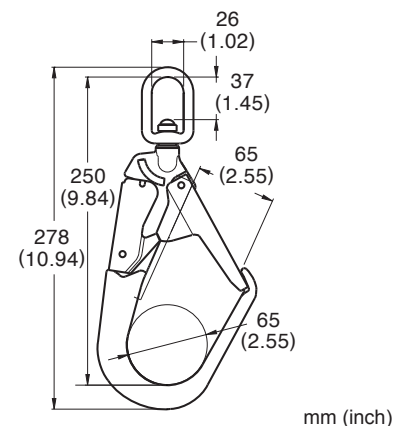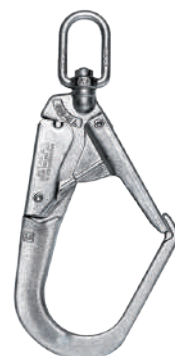

N-360
Large Capacity Rebar Hook

Steel, heat treated
Min. breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 29.8 oz. / 846 g

Zinc Plated

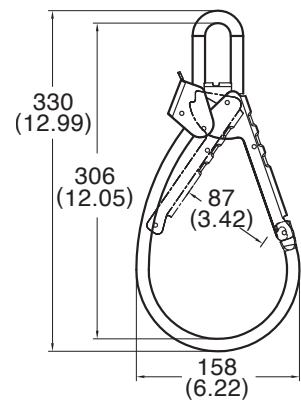

mm (inch)




N-416L D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 4.2 oz. / 120 g

Zinc Plated



Light Weight Designed

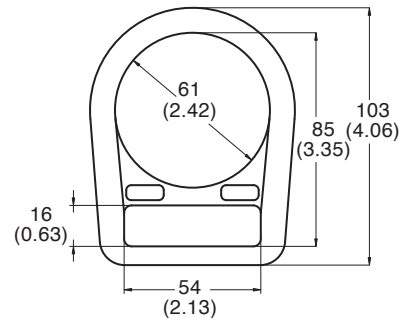

mm (inch)


N-416L-R Roller D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 4.3 oz. / 122 g

Zinc Plated



Light Weight Designed

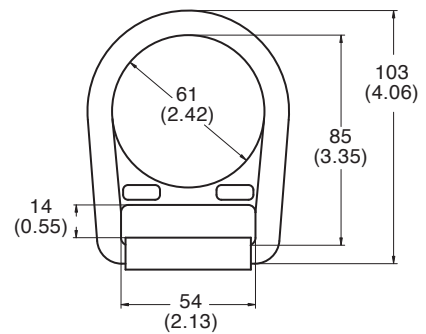


mm (inch)

N-416 D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.0 oz. / 142 g

Zinc Plated

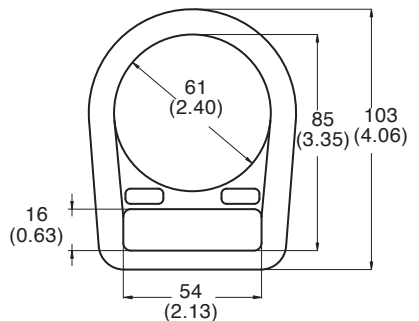


mm (inch)

N-416R Roller D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.1 oz. / 146 g

Zinc Plated

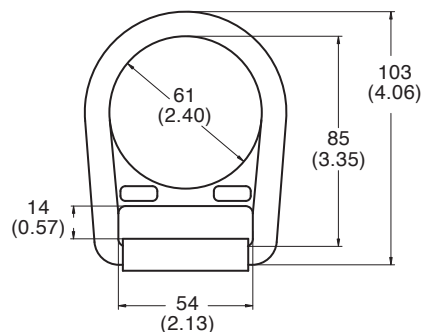


mm (inch)

N-414 D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.1 oz. / 145 g

Zinc Plated

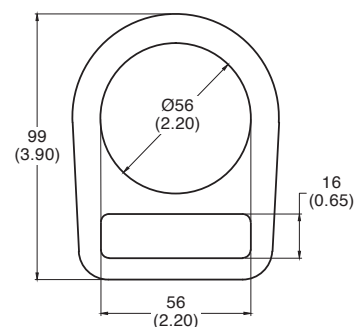


mm (inch)

N-414X D Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.1 oz. / 117 g

Zinc Plated

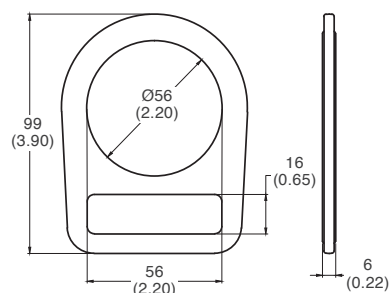


mm (inch)

N-414R Roller D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.2 oz. / 149 g

Zinc Plated

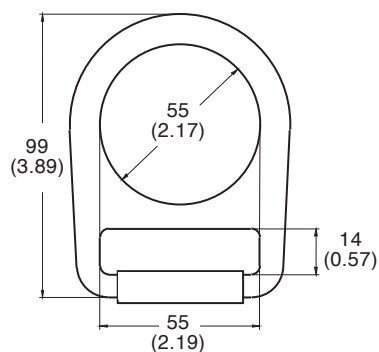


mm (inch)

N-409 D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 8.4 oz. / 228 g


Zinc Plated

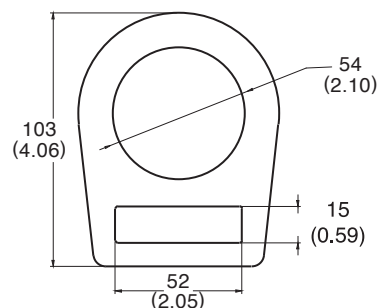

mm (inch)

N-418 D-Ring



Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 3.8 oz. / 112 g

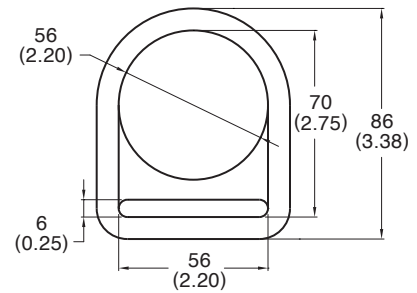

mm (inch)

N-415 Stamped D-Ring



Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.0 oz. / 142 g

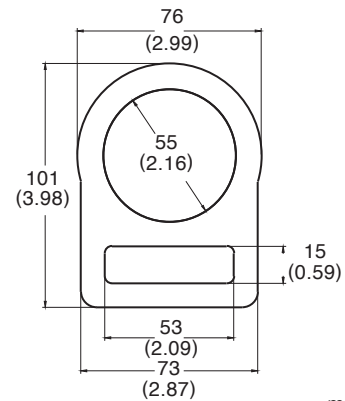

mm (inch)

N-415R Roller Stamped D-Ring


Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.1 oz. / 145 g

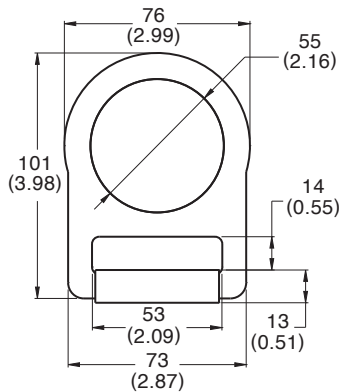

mm (inch)

N-415X Stamped D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 3.5 oz. / 100 g

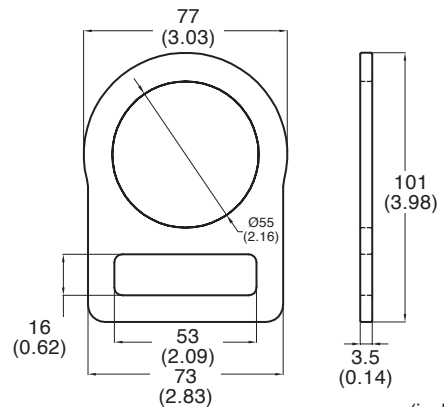


mm (inch)

N-419 Stamped D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 4.8 oz. / 136 g


Zinc Plated

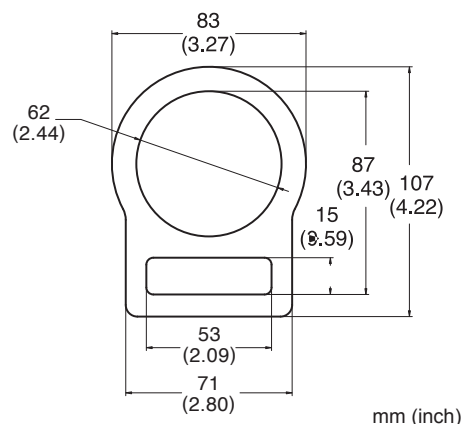

N-419R Roller Stamped D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.0 oz. / 142 g



Zinc Plated

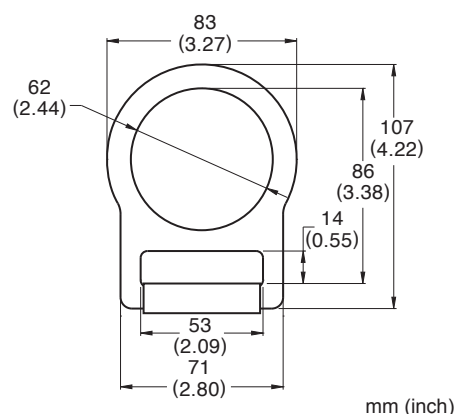

N-477 Stamped Bent D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 4.8 oz. / 138 g


Zinc Plated

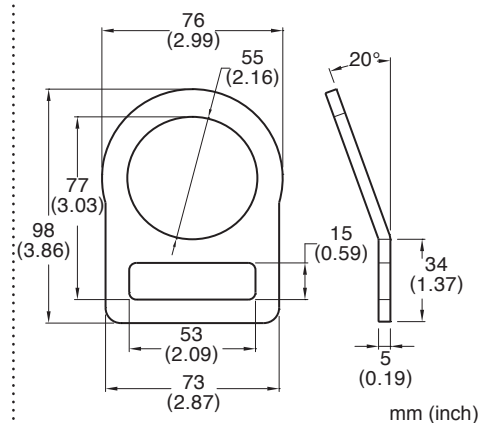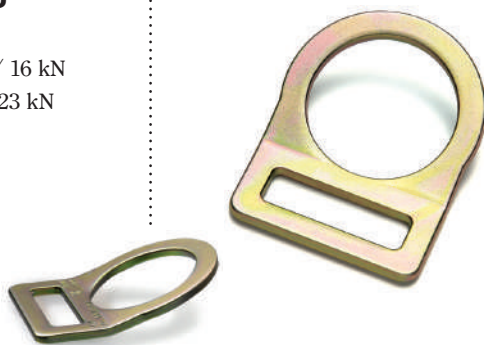

N-417 D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 8.0 oz. / 227 g

Zinc Plated

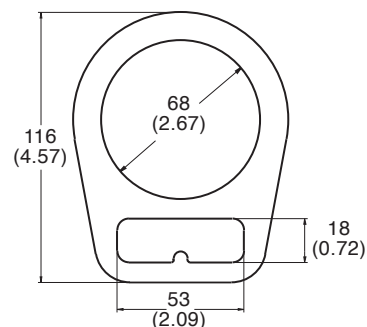

N-437

Bent D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 7.9 oz. / 225 g

Zinc Plated

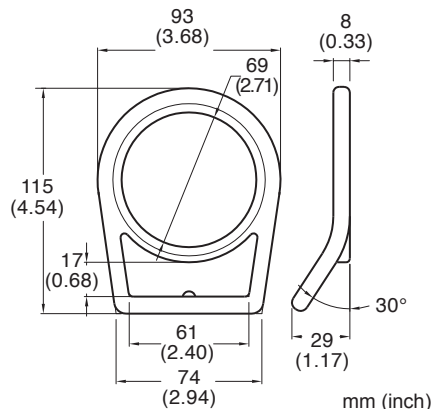

N-476

D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 7.9 oz. / 225 g

Zinc Plated

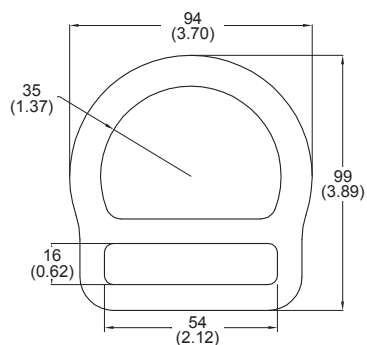

N-476R

Roller D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 8.0 oz. / 227 g

Zinc Plated

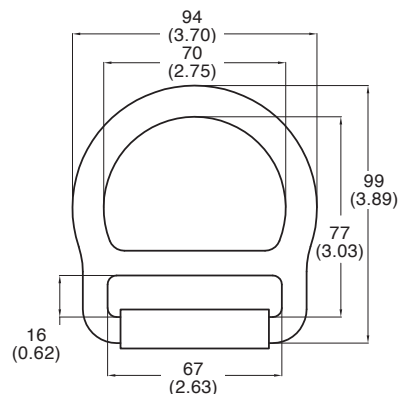

N-455

Stamped D-Ring

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.2 oz. / 120 g

Zinc Plated

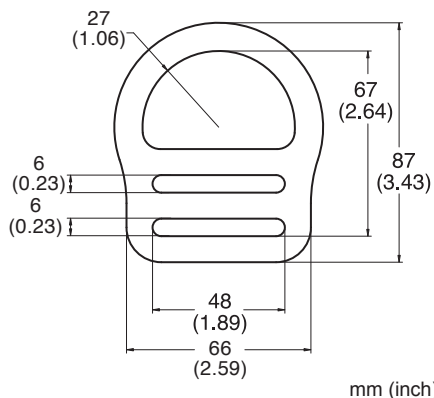

N-4053

3-Bar D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.49 oz. / 99 g

Zinc Plated

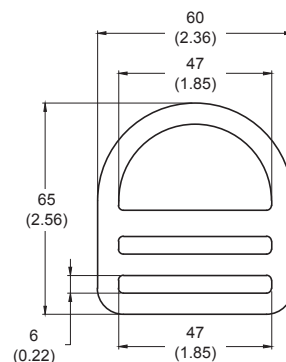

mm (inch)

N-460

D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 6.9 oz. / 180 g

Zinc Plated

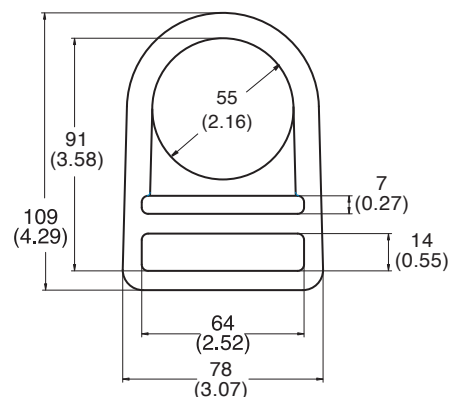

mm (inch)

N-461

D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 5.9 oz. / 170 g

Zinc Plated

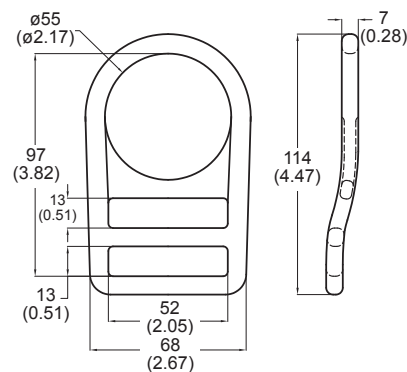

mm (inch)

N-469

D-Ring with Clip

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 9.4 oz. / 269 g

Zinc Plated

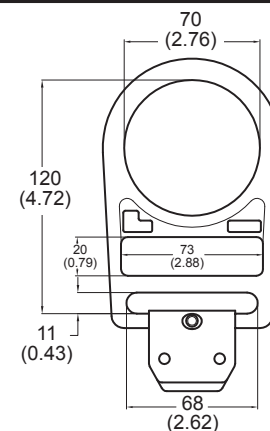

mm (inch)

N-478

Bent D-Ring

Forged steel, heat treated


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.8 oz. / 108 g

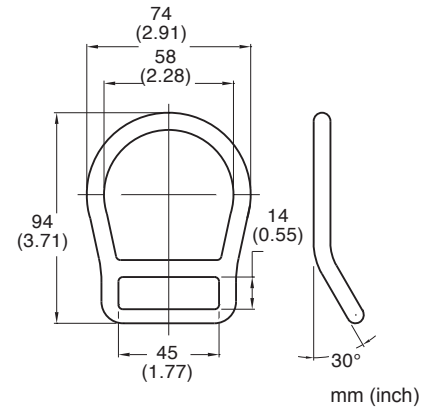

Zinc Plated

N-493

Stamped D-Ring

Sheet steel, heat treated


100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.78oz. / 79g

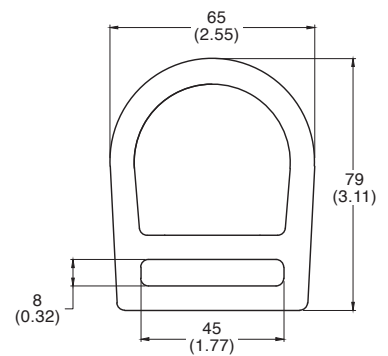

Zinc Plated

N-493-BT

Stamped Bent D-Ring

Sheet steel, heat treated


100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.78oz. / 79g

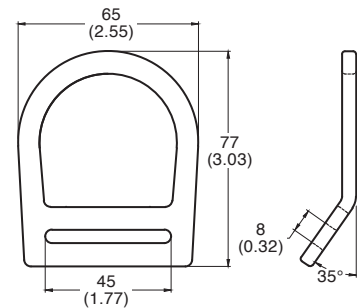

Zinc Plated

N-492

D-Ring

Forged steel, heat treated


100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16


Net weight : 4.48oz. / 127g



Zinc Plated

N-492-BT Bent D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.48oz. / 127g



Zinc Plated


mm (inch)

N-403XL Stamped D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.5 oz. / 71 g



Light Weight Designed

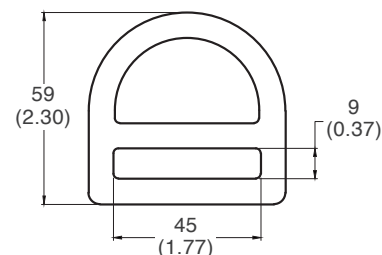


Zinc Plated

mm (inch)

N-403L Stamped D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 78 g

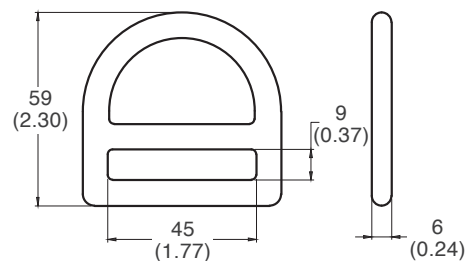


Zinc Plated

mm (inch)

N-403 D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 2.8 oz. / 80 g

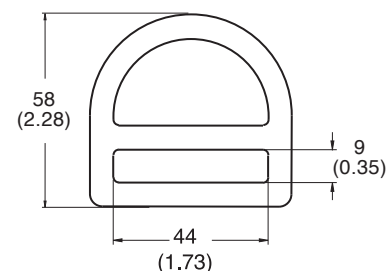

Zinc Plated

mm (inch)

N-445 Bent D-Ring

Forged steel, heat treated


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.1 oz. / 90 g

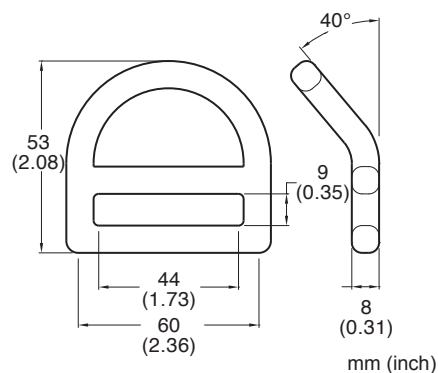

Zinc Plated

N-445L Stamped Bent D-Ring

Sheet steel, heat treated



100% proof loaded to 3600 lbs / 16 kN

Min. breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 80 g

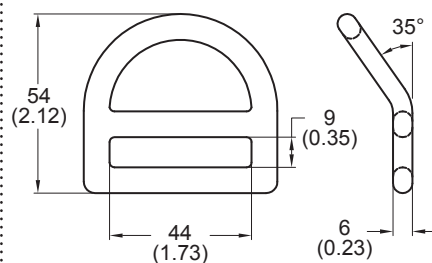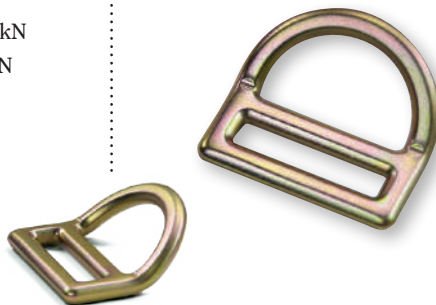

Zinc Plated

mm (inch)

N-430

Stamped D-Ring, with bar

Sheet steel, heat treated


100% proof loaded to 3600 lbs / 16 kN

Mini. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.1 oz. / 90 g

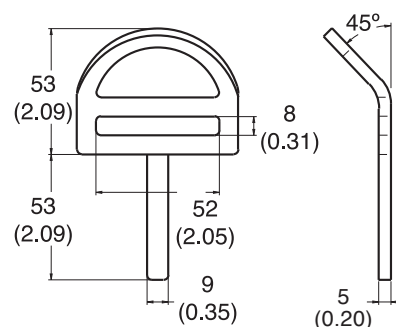

mm (inch)

N-432

Stamped D-Ring

Sheet steel, heat treated


100% proof loaded to 3600 lbs / 16 kN

Mini. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 80 g.

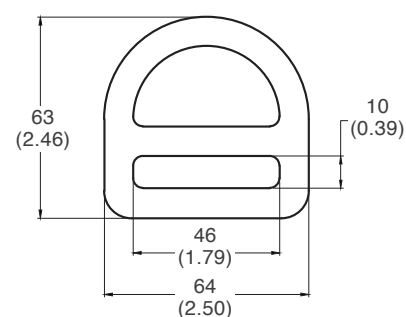

mm (inch)

N-431

Stamped Bent D-Ring

Sheet steel, heat treated


100% proof loaded to 3600 lbs / 16 kN

Mini. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 80 g

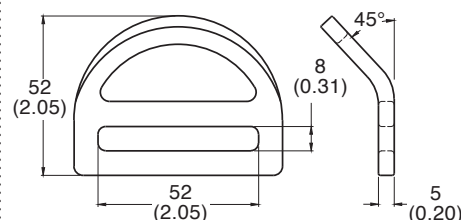

mm (inch)

N-405

D-Ring

Forged steel, heat treated


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.1 oz. / 88 g

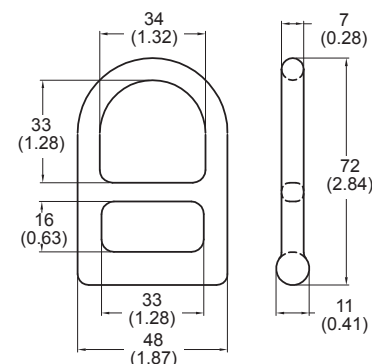

mm (inch)

Zinc Plated

N-4052

Stamped Bent D-Ring

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.97 oz. / 141 g

Zinc Plated

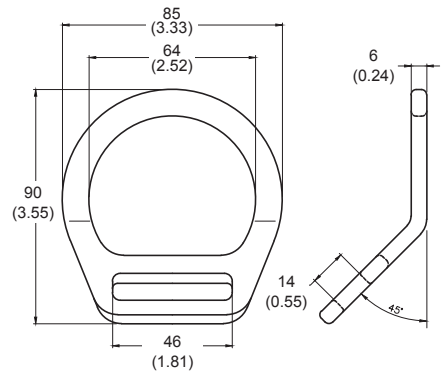

mm (inch)

N-407L

Stamped D-Ring

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Mini. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 78 g

Zinc Plated

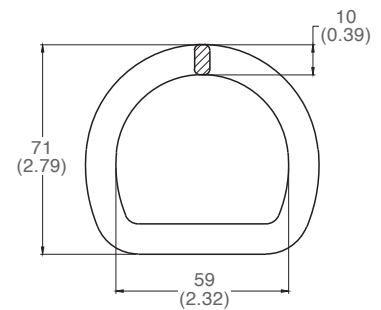

mm (inch)

N-4021L

Stamped D-Ring

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Mini. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 80 g

Zinc Plated

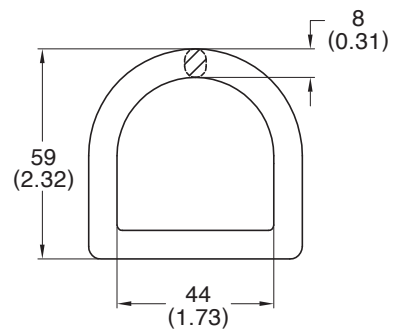

mm (inch)

N-2817

D Ring with Bracket Weldment

Sheet steel, heat treated


Min. Breaking load : 5000 lbs / 23 kN

Meets:

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 9.5 oz. / 268 g


yellow zinc

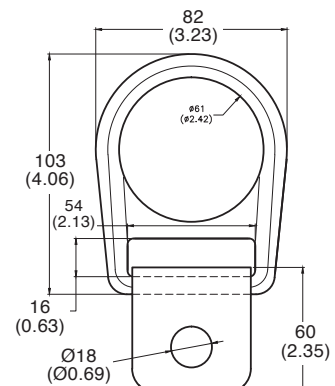

mm (inch)

N-407 D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.4 oz. / 126 g




Zinc Plated

mm (inch)

N-407R Roller D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 4.5 oz. / 129 g

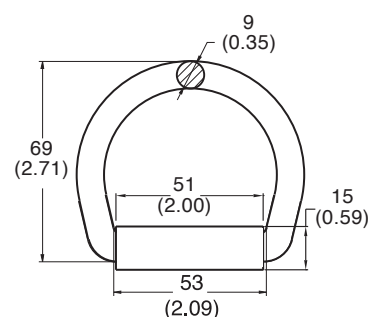


Zinc Plated

mm (inch)

N-408 D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.3 oz. / 150 g




Zinc Plated

mm (inch)

N-408R Roller D-Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Net weight : 5.4 oz. / 153 g

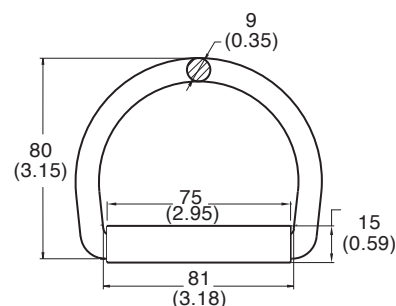


Zinc Plated

mm (inch)

N-402 D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Mini. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 3.0 oz. / 86 g




Zinc Plated

mm (inch)

N-402W Welded D-Ring

Steel
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 2.33 oz. / 66 g




Zinc Plated

mm (inch)

N-404 Stamped D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.5 oz. / 70 g





Zinc Plated

mm (inch)

N-404R Stamped Roller D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.8 oz. / 77 g



Zinc Plated

mm (inch)

N-429
Delta D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● ANSI Z359.12-2019

● CSA Z259.12-16

Net weight : 1.6 oz. / 45 g

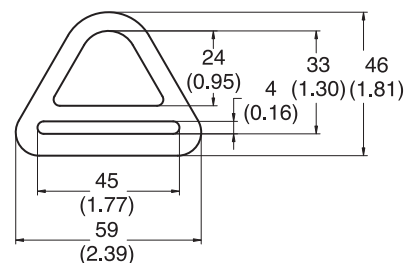

Zinc Plated

mm (inch)

N-475
D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● ANSI Z359.12-2019

● CSA Z259.12-16

Net weight : 4.2 oz. / 120 g



Zinc Plated

mm (inch)

N-449
D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● ANSI Z359.12-2019

● CSA Z259.12-16

Net weight : 2.1 oz. / 60 g

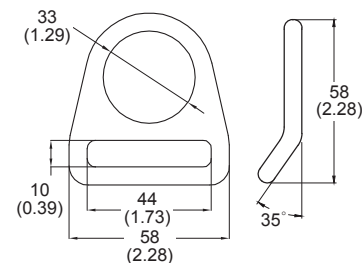

Zinc Plated

mm (inch)

N-406
D-Ring

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● ANSI Z359.12-2019

● CSA Z259.12-16

Net weight : 4.0 oz. / 120 g




Zinc Plated

mm (inch)

N-487 Stamped O Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.0 oz. / 57 g

Zinc Plated




mm (inch)

N-486 O Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.1 oz. / 60 g

Zinc Plated

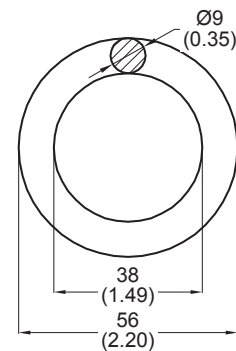


mm (inch)

N-453 O Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.0 oz. / 150 g

Zinc Plated




mm (inch)

N-483 O Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.2 oz. / 146 g


Zinc Plated



mm (inch)

N-489 O Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 7.0 oz. / 198 g




Zinc Plated

mm (inch)

N-422 Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.0 oz. / 28 g

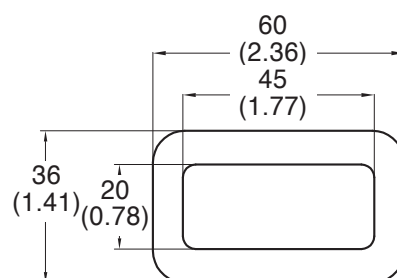


Zinc Plated

mm (inch)

N-4226 Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.4 oz. / 39 g

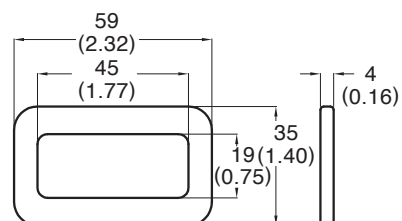


Zinc Plated

mm (inch)

N-4224 Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.9 oz. / 55.2 g

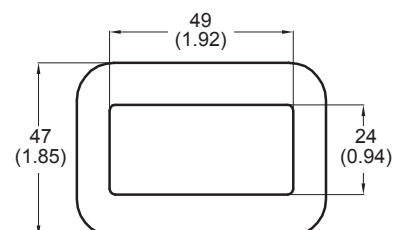

Zinc Plated

mm (inch)

N-442 Loop Adjuster


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.6 oz. / 17 g

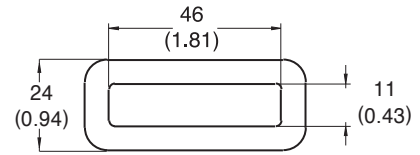

Zinc Plated

mm (inch)

N-401 Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 54 g



Zinc Plated

*Supplied without sliding pin

mm (inch)

N-4011 Quick Buckle



Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.3 oz. / 38 g

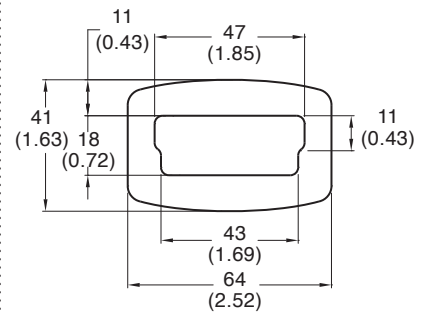

Zinc Plated

mm (inch)

N-4012 Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 55 g

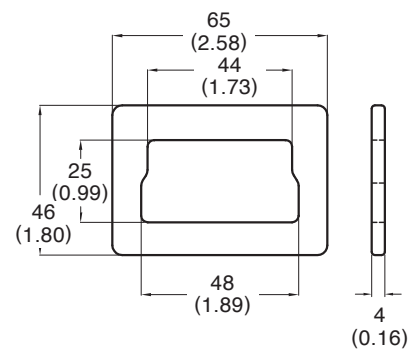

Zinc Plated

mm (inch)

N-4016

Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 53 g

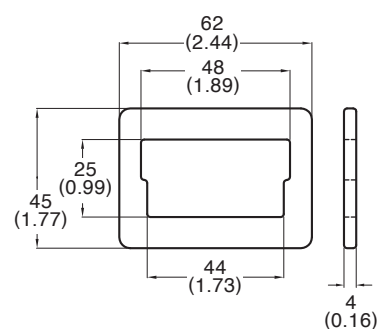

Zinc Plated

mm (inch)

N-4013

Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.3 oz. / 37 g

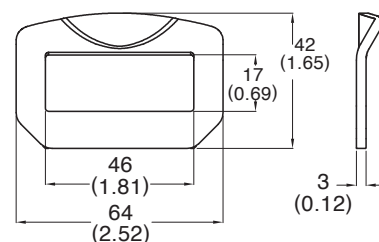

Zinc Plated

mm (inch)

N-4014

Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.8 oz. / 23 g

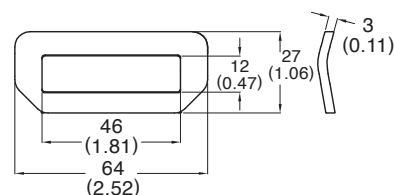

Zinc Plated

mm (inch)

N-428

Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.5 oz. / 15 g

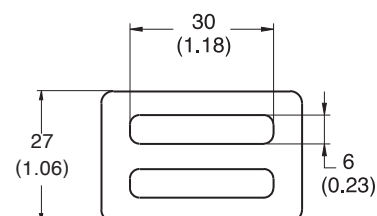


Zinc Plated

mm (inch)

N-434 Stamped Adjuster

Sheet steel, heat treated
Min. Breaking Load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.4 oz. / 41 g

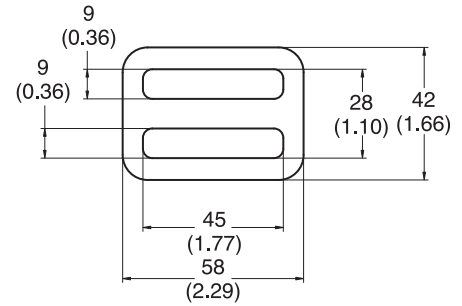


Zinc Plated

mm (inch)

N-420 Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.0 oz. / 27 g

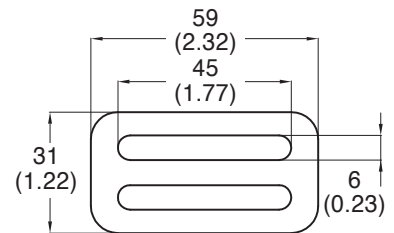


Zinc Plated

mm (inch)

N-4201 Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.3 oz. / 38 g




Zinc Plated

mm (inch)

N-4206 Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.4 oz. / 40 g

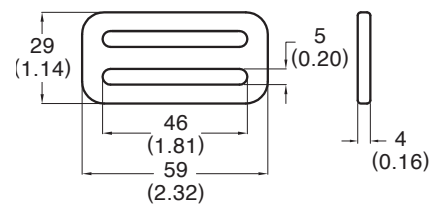

Zinc Plated

mm (inch)


N-435

Slide Buckle -Non-Rated

Sheet steel, heat treated

Min. Tensile strength : 40 lbs / 0.18 kN

Net weight : 0.5 oz. / 13 g

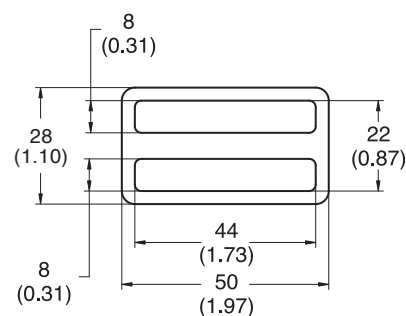

Zinc Plated

mm (inch)

N-421

Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.3 oz. / 36 g

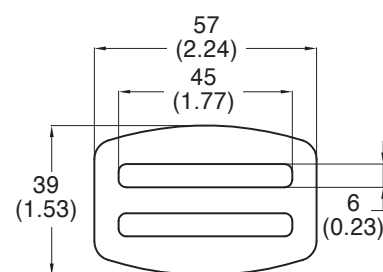

Zinc Plated

mm (inch)

N-4203

Quick Buckle



Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.3 oz. / 36 g

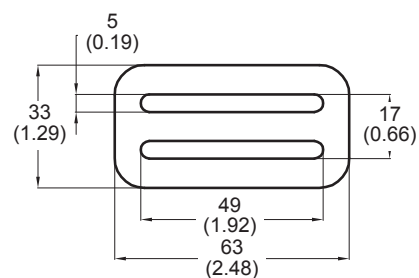

Zinc Plated

mm (inch)

N-4501

Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.5 oz. / 70 g

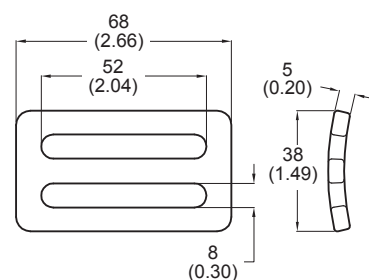

Zinc Plated

mm (inch)

N-4502 Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.3 oz. / 66 g



Zinc Plated

mm (inch)

N-4207 Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.0 oz. / 28 g

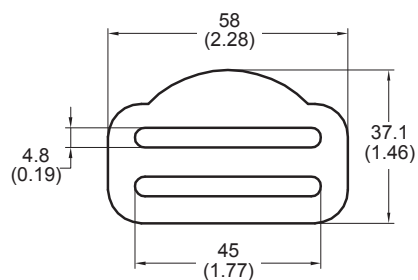

Zinc Plated

mm (inch)

N-451 Oval Adjuster


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 60 g

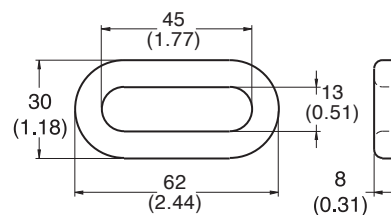

Zinc Plated

mm (inch)

N-413 Adjuster


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 6.1 oz. / 170 g

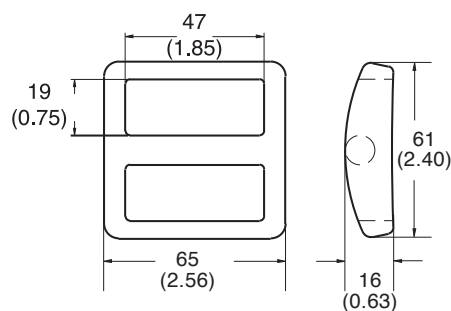

Zinc Plated

mm (inch)

N-413X Stamped Adjuster


Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.5 oz. / 100 g



Zinc Plated

mm (inch)

N-4135 Adjuster



Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.9 oz. / 110 g

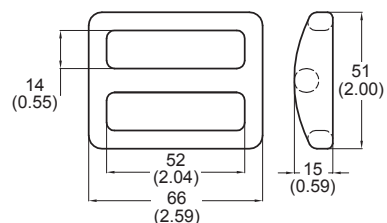

Zinc Plated

mm (inch)

N-436 Quick Buckle


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.3 oz. / 65 g

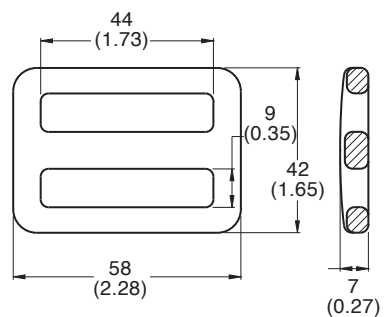

Zinc Plated

mm (inch)

N-452 Adjuster


Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.6 oz. / 46 g

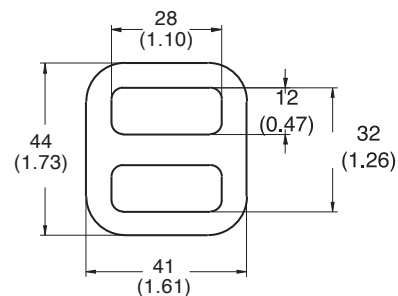

Zinc Plated

mm (inch)

N-452L Stamped Adjuster


Sheet steel, heat treated

Min. Breaking Load : 5000lbs / 23kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 53 g

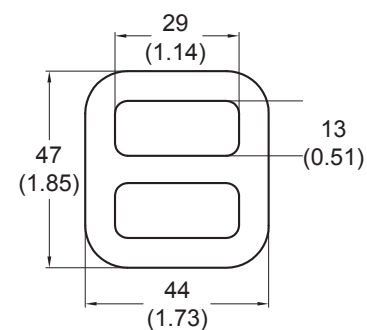

Zinc Plated

mm (inch)

N-433 Adjuster


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.4 oz. / 95 g

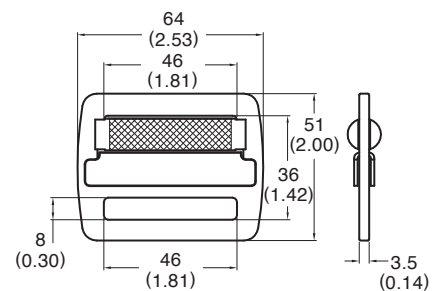

Zinc Plated

mm (inch)

N-433L Adjuster


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.2 oz. / 90 g

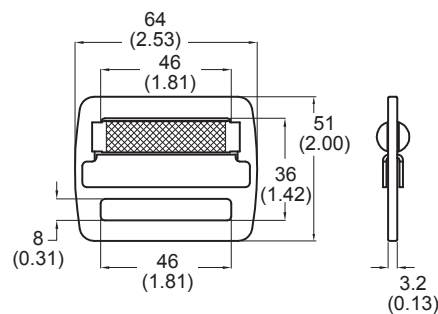

Zinc Plated

mm (inch)

N-448 Offset Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.8 oz. / 51 g

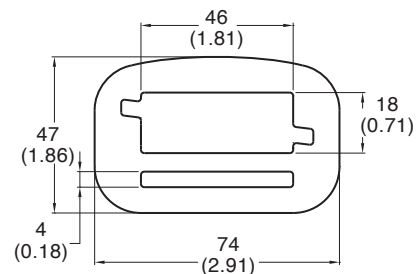

Zinc Plated

mm (inch)

N-423 Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.8 oz. / 51 g



Zinc Plated

mm (inch)

N-424 Quick Buckle



Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.2 oz. / 35 g



Zinc Plated

mm (inch)

N-4237 Quick Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.8 oz. / 50 g

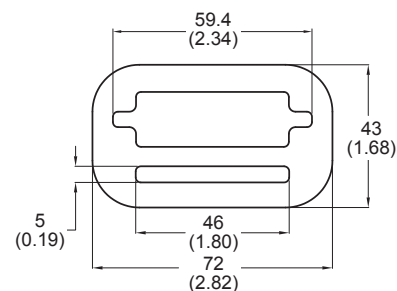

Zinc Plated

mm (inch)

N-412 Adjuster



Forged steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.1 oz. / 88 g

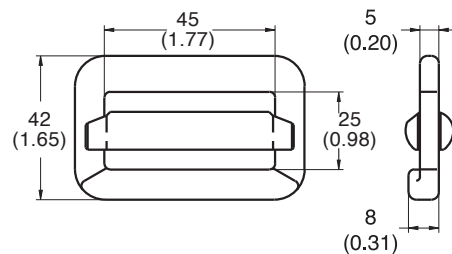

Zinc Plated

mm (inch)

N-4910 Adjuster Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.9 oz. / 28 g

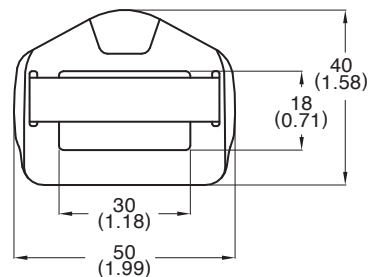

ED Black

mm (inch)

N-4911 Adjuster Buckle


Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.5 oz. / 45 g

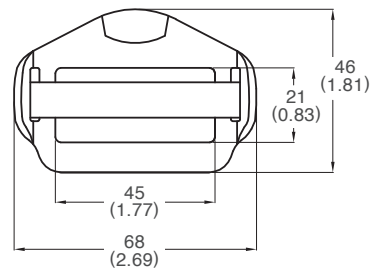

ED Black

mm (inch)

N-443 Adjuster Buckle



Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.8 oz. / 50 g

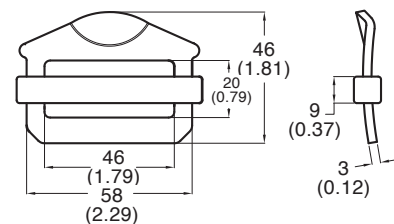


Zinc Plated

mm (inch)

N-4940-BZP
Quick Buckle

Sheet steel, heat treated
Net weight : 0.6 oz. / 16 g




Black Zinc

mm (inch)

N-4941
Quick Buckle

Sheet steel, heat treated
Net weight : 1.0 oz. / 29 g





Yellow Zinc

mm (inch)

N-400 Adjuster



Sheet steel, heat treated
Min. Breaking Load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 3.3 oz. / 93 g

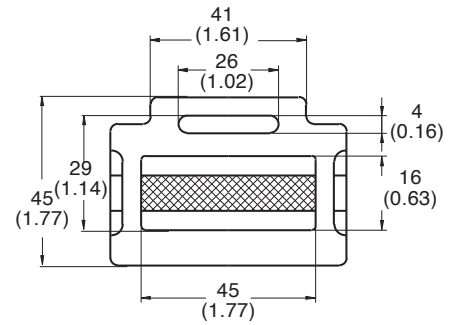

mm (inch)

N-400 / S Adjuster with spring



Sheet steel, heat treated
Min. Breaking Load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 3.4 oz. / 96 g

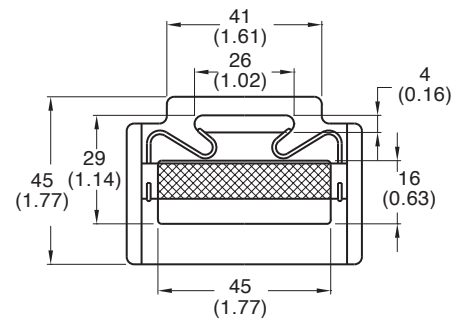

mm (inch)

N-4001 Adjuster


Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 2.8 oz. / 80 g

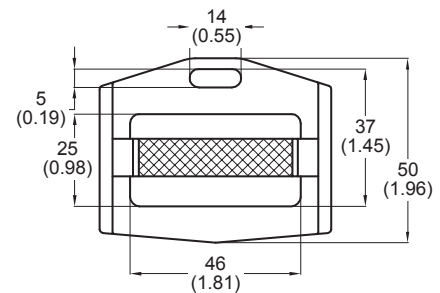

mm (inch)

N-411 Adjuster D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 4.2 oz. / 118 g

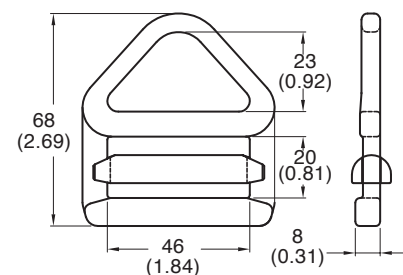

mm (inch)

N-4335

Bent Adjuster Buckle with silding bar adjuster

Sheet steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 78 g

Zinc Plated



N-4335.SP

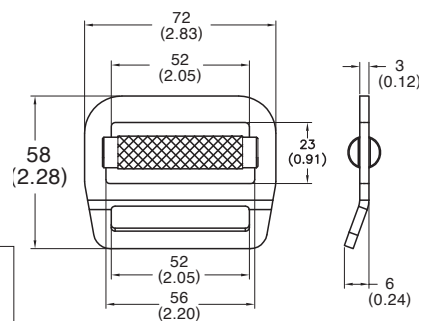

mm (inch)

N-425

Adjuster Buckle with silding bar adjuster

Sheet steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.4 oz. / 67 g

Zinc Plated



N-425.SP

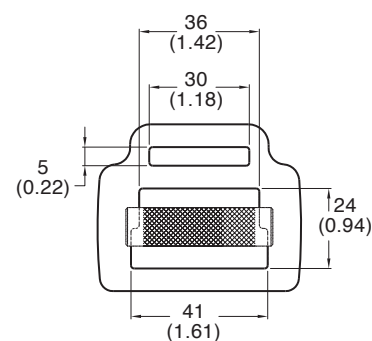

mm (inch)

N-426

Adjuster Buckle with silding bar adjuster

Sheet steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.1 oz. / 88 g

Zinc Plated



N-426.SP

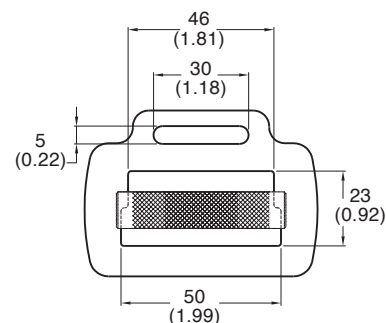

mm (inch)

N-427

Adjuster Buckle with silding bar adjuster

Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.2 oz. / 90 g.

Zinc Plated



N-427.SP

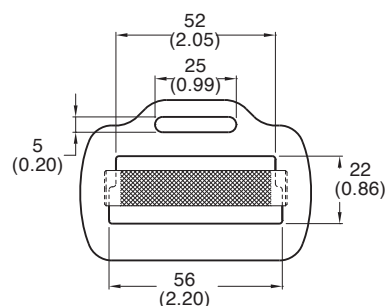

mm (inch)

N-4797 Extra Lock QR Buckle

Sheet steel, heat treated

Min. Breaking Load : 4000 lbs / 18 kN


Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 5.5 oz. / 156 g

Patent US 9578929

Zinc Plated

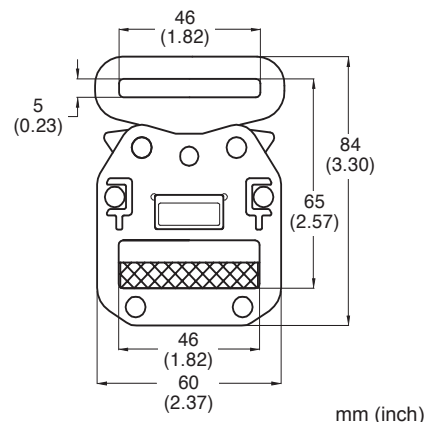

N-479 QRA Buckle (Adjust Buckle)

Sheet steel, heat treated

Min. Breaking Load : 4000 lbs / 18 kN



Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.3 oz. / 122 g

Patent US 10609989

Zinc Plated

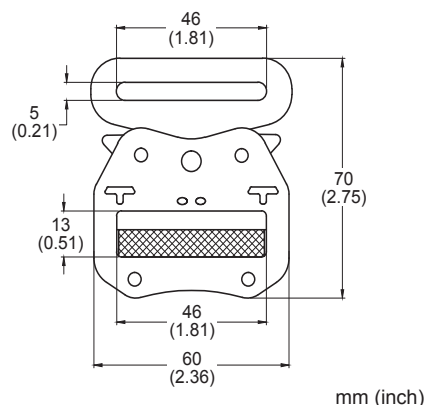

N-4793 QRA Buckle (Adjust Buckle)

Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN


Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.5 oz. / 127 g

Patent US 10609989

Zinc Plated

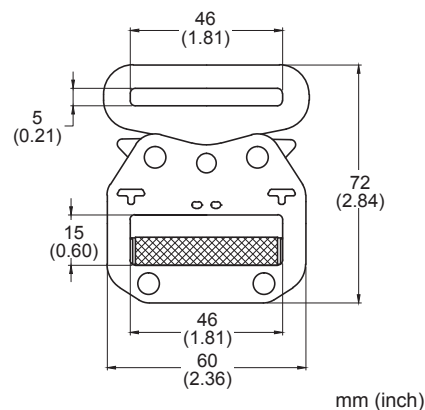


N-438 Safety Buckle with bayonet catch

Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 6.3 oz. / 180 g

Zinc Plated

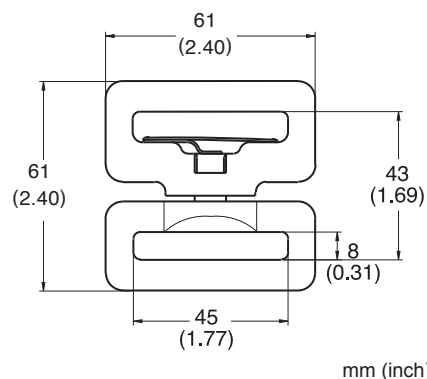

N-439X Stamped Tongue Buckle, 1-7/8"

Sheet steel, heat treated



Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.7 oz. / 78 g

Zinc Plated

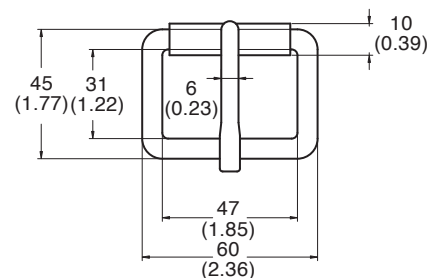

mm (inch)

N-439 Tongue Buckle, 1-7/8"

Forged steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.5 oz. / 99 g

Zinc Plated

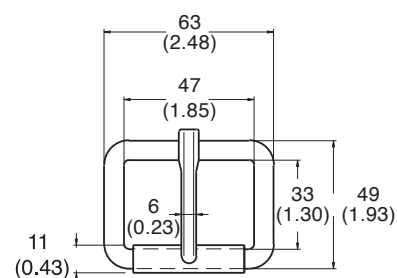

mm (inch)

N-441 Tongue Buckle, 2"

Forged steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.3 oz. / 96 g

Zinc Plated

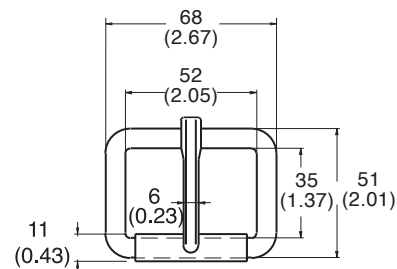

mm (inch)

N-440 Twin Tongue Buckle, 2"

Forged steel, heat treated



Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.0 oz. / 115 g

Zinc Plated

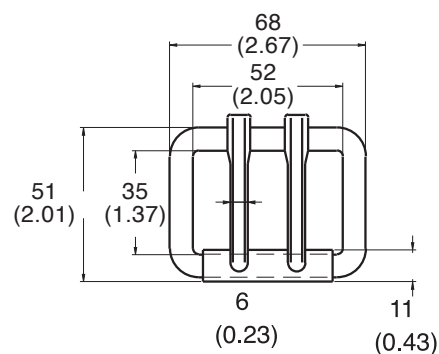

mm (inch)



N-DE244-0 Dielectric Carabiner

Alloy steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN


Meets:

- EN 362 : 2004

Minimum 4kV Dielectric Resistance

Net weight : 5.7 oz. / 163 g

Patent Pending

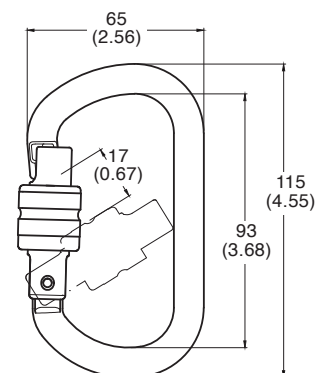

mm (inch)

Plastic Over Molded

N-DE360 Dielectric ANSI Rope Snap Hook

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN


Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Minimum 9kV Dielectric Resistance

Net weight : 14.2 oz. / 404 g

Patent US 9885379



mm (inch)

Plastic Over Molded

N-DE301 Dielectric Rebar Hook

Forged steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN


Meets :

- EN362 : 2004

Minimum 9kV Dielectric Resistance

Net weight : 19.2 oz. / 548g

Patent US 9199105

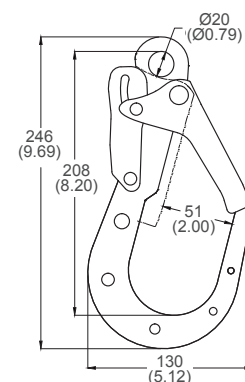

mm (inch)

Plastic Over Molded

N-DE300 Dielectric Snap Hook

Sheet steel, heat treated

Min. Breaking load : 5000 lbs / 23 kN


Meets :

- EN362 : 2004

Minimum 9kV Dielectric Resistance

Net weight : 9.2 oz. / 264 g

Patent US 9199105




mm (inch)

Plastic Over Molded

N-DE001 Dielectric D-Ring

Sheet steel, heat treated
100% proof loaded to 3600lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 9kV Dielectric Resistance
Net weight : 5.8 oz. / 164 g

Plastic Over Molded

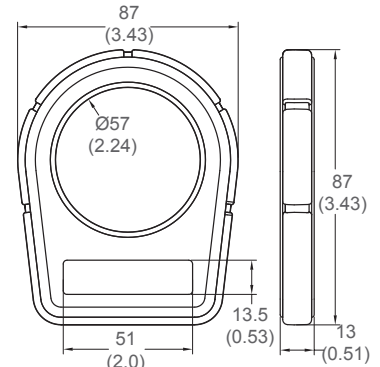


mm (inch)

N-DE002 Dielectric Bent D-Ring

Sheet steel, heat treated
100% proof loaded to 3600lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 9kV Dielectric Resistance
Net weight : 6.1 oz. / 176 g

Plastic Over Molded

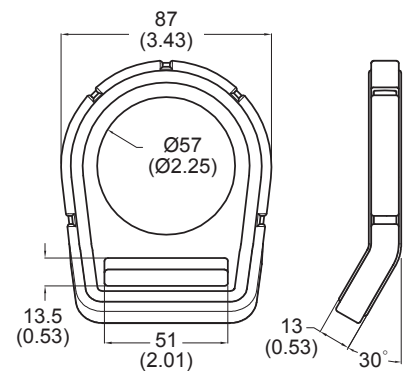


mm (inch)

N-DE403 Dielectric D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 2.7 oz. / 77 g

Plastic Over Molded




mm (inch)

N-DE403B Dielectric Bent D-Ring

Sheet steel, heat treated
100% proof loaded to 3600 lbs / 16kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 2.6 oz. / 76 g

Plastic Over Molded

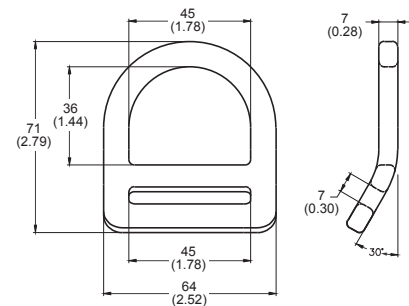


mm (inch)

N-DE415 Dielectric D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 5.3 oz. / 152 g

Plastic Over Molded




mm (inch)

N-DE415B Dielectric Bent D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 5.2 oz. / 147 g

Plastic Over Molded




mm (inch)

N-DE460 Dielectric D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 7.0 oz. / 200 g

Plastic Over Molded




mm (inch)

N-DE460B Dielectric Bent D-Ring

Sheet steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 Minimum 4kV Dielectric Resistance
 Net weight : 7.0 oz. / 200 g


Plastic Over Molded



mm (inch)

N-DE007 Dielectric Quick Release Buckle

Sheet steel, heat treated




Minimum 9kV Dielectric Resistance

Net weight : 4.5 oz. / 128 g

Patent US 10010141

Plastic Over Molded

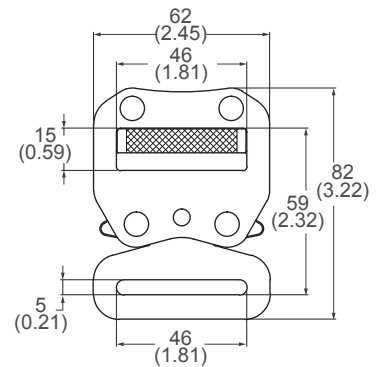

mm (inch)

N-DE008 Dielectric Quick Release Buckle

Sheet steel, heat treated

Minimum 9kV Dielectric Resistance

Meets :


- EN 358
- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 5.0 oz. / 141 g

Patent US 10010141

Plastic Over Molded

New

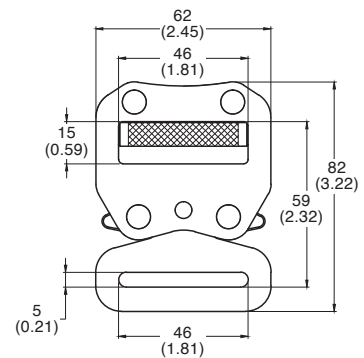

mm (inch)

N-DE009 Dielectric Adjuster

Sheet steel, heat treated

Min. Breaking load : 4000 lbs / 18 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 9kV Dielectric Resistance

Net weight : 2.98 oz. / 85g

Patent Pending

Plastic Over Molded



mm (inch)

N-DE483 Dielectric O-Ring

Sheet steel, heat treated

100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN


Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 4kV Dielectric Resistance

Net weight : 3.6 oz. / 103 g

Plastic Over Molded



mm (inch)

N-DE518 Dielectric Alum D Ring

Aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets:

- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 4kV Dielectric Resistance

Net weight : 2.9 oz. / 84 g

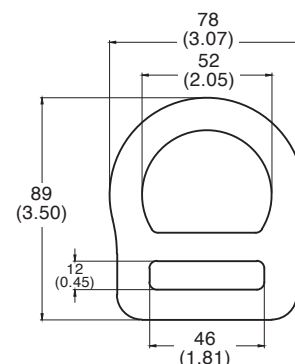

mm (inch)

N-DE529 Dielectric Bent Alum D Ring

Aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets:

- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 4kV Dielectric Resistance

Net weight : 4.2 oz. / 120 g

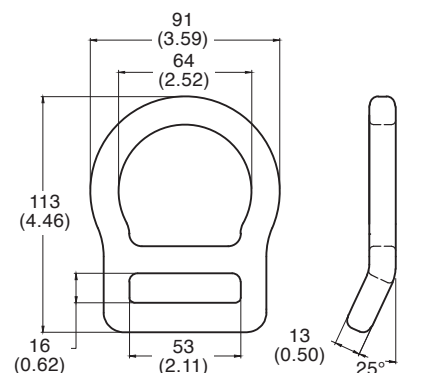

mm (inch)

N-DE005 Dielectric Quick Buckle

Sheet steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 9kV Dielectric Resistance

Net weight : 1.6 oz. / 45 g

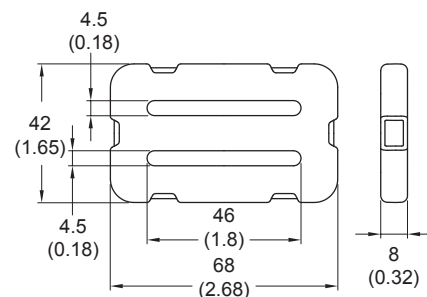

mm (inch)

N-DE006 Dielectric Quick Buckle

Sheet steel, heat treated


Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Minimum 9kV Dielectric Resistance

Net weight : 2.2 oz. / 61 g

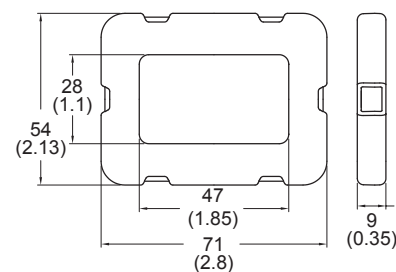


mm (inch)

Plastic Over Molded

N-DE420 Dielectric Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 1.3 oz. / 36 g




Plastic Over Molded

mm (inch)

N-DE422 Dielectric Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 1.1 oz. / 32 g




Plastic Over Molded

mm (inch)

N-DE448 Dielectric Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 2.5 oz. / 70 g

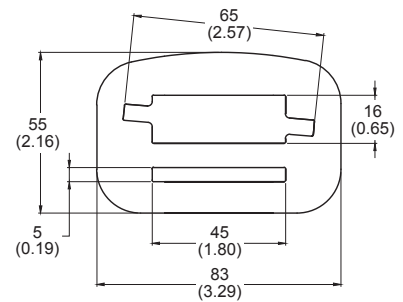


Plastic Over Molded

mm (inch)

N-DE4207 Dielectric Quick Buckle

Sheet steel, heat treated
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 1.3 oz. / 38 g




Plastic Over Molded

mm (inch)

N-DE452
Dielectric Quick Buckle

Sheet steel, heat treated
Min. Breaking load: 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Minimum 4kV Dielectric Resistance
Net weight : 1.3 oz. / 35.7g



Plastic Over Molded

mm (inch)



N-5271T

Aluminum Rebar Hook 3600 LBS gate/Transverse Load

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16kN


Min. Breaking load : 5000 lbs / 23 kN

Meets:

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 22.3 oz. / 637 g

Anodized

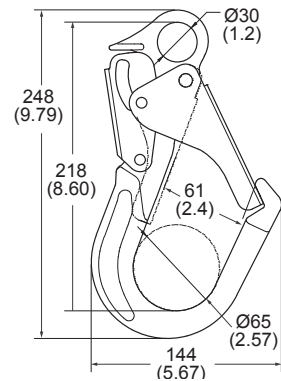

mm (inch)

N-5275T

Indicator Swivel Alum Rebar Hook 3600 LBS gate / Transverse Load

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 24.68oz. / 705 g

Anodized

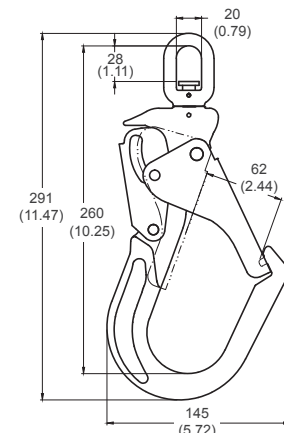

mm (inch)

N-5268

Aluminum Step Bolt Hook 3600 LBS gate strength

Specifically designed for step bolts 16 mm diameter

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 14.5 oz. / 414 g

Anodized

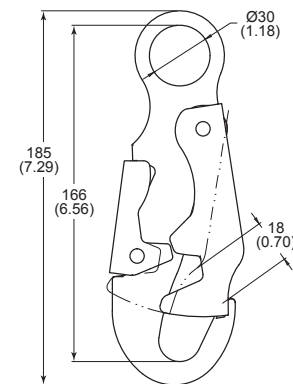

mm (inch)

N-5261

Aluminum Snap Hook 3600 LBS gate strength

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 8.7 oz. / 247 g

Anodized



mm (inch)

N-5265

Alum Indicator Swivel Snap Hook
3600 LBS gate strength

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 10.6 oz. / 304 g

Anodized

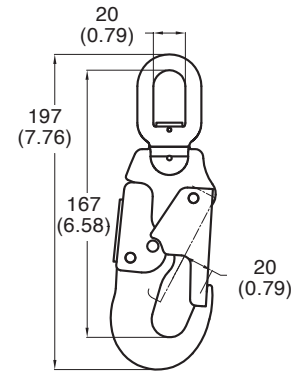

mm (inch)

N-5265 / 0

Aluminum Swivel Snap Hook
3600 LBS gate strength
(non - Indicator)

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 10.5 oz. / 300 g

Anodized

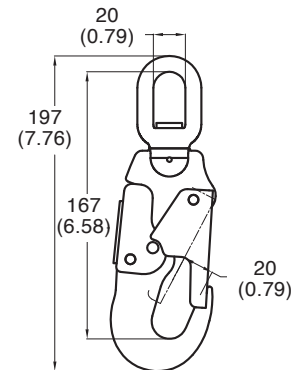

mm (inch)

N-5246

Aluminum Snap Hook

Sheet aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 6.0 oz. / 169 g

Anodized



mm (inch)

N-5248

Aluminum Snap Hook

Sheet aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 8.5 oz. / 244 g

Anodized



mm (inch)

Aluminum Components



N-331



SRD Attachment Bracket

Forged steel / aluminum alloy

Net weight : 5.6 oz. / 159 g

Patent US 10065057

Zinc Plated / Anodized

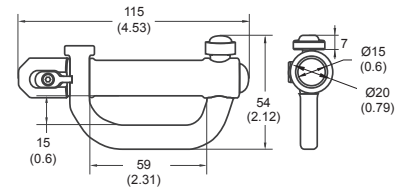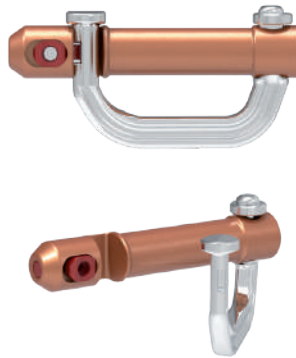

mm (inch)

N-339



SRD Attachment Bracket

Forged steel

Net weight : 5.43 oz. / 154 g

Patent Pending

Zinc Plated

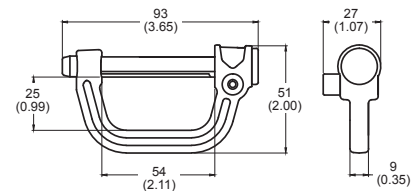

mm (inch)

N-502

Aluminum Snap Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 6.7 oz. / 189 g

Anodized




N-502-1
Blue



N-502-2
Green



N-502-3
Red



mm (inch)

N-504

Aluminum Snap Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 5.5 oz. / 158 g


Anodized



mm (inch)

N-500
Aluminum Rebar Hook

Forged aluminum alloy
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 18 oz. / 520 g

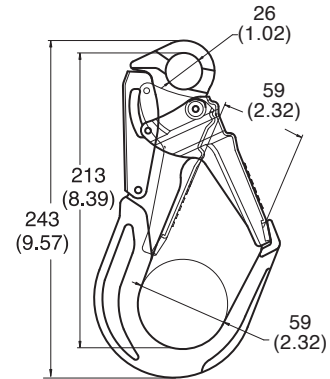


mm (inch)

Anodized

N-501
Aluminum Rebar Hook

Forged aluminum alloy
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 16.2 oz. / 460 g

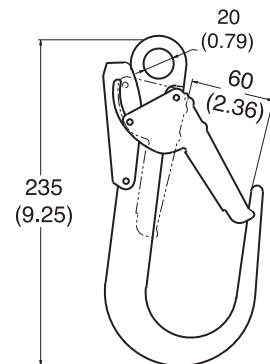


mm (inch)

Anodized

N-50130
Aluminum Rebar Hook

Forged aluminum alloy
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 16.8 oz. / 480 g




mm (inch)

Anodized

N-501110
Aluminum Huge Rebar Hook

Forged aluminum alloy
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 32.8 oz. / 930 g

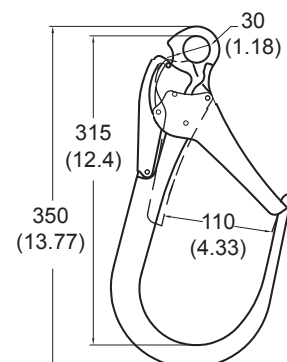

mm (inch)

Anodized

N-501110X

Aluminum Huge Rebar Hook

Forged aluminum alloy


Min. Breaking load : 4500 lbs / 20 kN

Meets :

● EN 362 : 2004

Net weight : 32.8 oz. / 930 g

Anodized

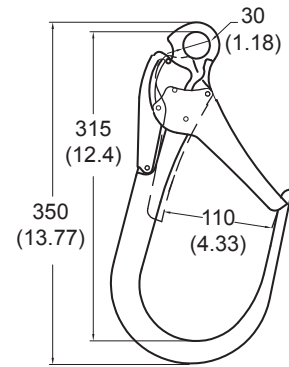

mm (inch)

N-5015

Aluminum Indicator Swivel Rebar Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● EN 362 : 2004

Net weight : 18.66 oz. / 529 g

Anodized



mm (inch)

N-5015 / 0

Aluminum Swivel Rebar Hook (non - Indicator)

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● EN 362 : 2004

Net weight : 18.66 oz. / 529 g

Anodized



mm (inch)

N-5018

Aluminum Rebar Hook

Forged aluminum alloy


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● EN 362 : 2004

Net weight : 9.2 oz. / 260 g

Anodized



mm (inch)

N-503

Aluminum Snap Hook


Forged aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 4.5 oz. / 130 g

Anodized

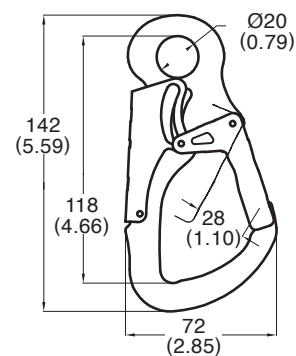

mm (inch)

N-5032

Aluminum Snap Hook


Forged aluminum alloy

Mini. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 4.6 oz. / 134 g

Anodized

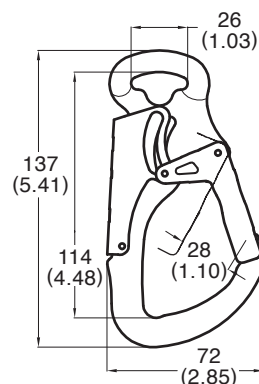

mm (inch)

N-5035

Aluminum Indicator Swivel Snap Hook


Forged aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 6.4 oz. / 184 g

Anodized

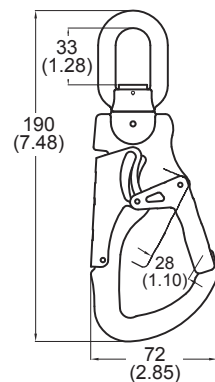

mm (inch)

N-5035 / 0

Aluminum Swivel Snap Hook (non - Indicator)


Forged aluminum alloy

Min. Breaking load : 5000 lbs / 23 kN

Meets EN 362 : 2004

Net weight : 6.3 oz. / 180 g

Anodized

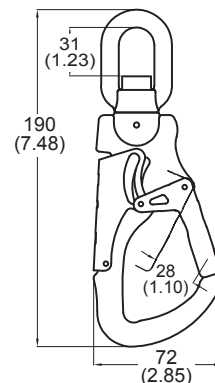

mm (inch)

N-528

Aluminum D-Ring

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.6 oz. / 75 g

Anodized

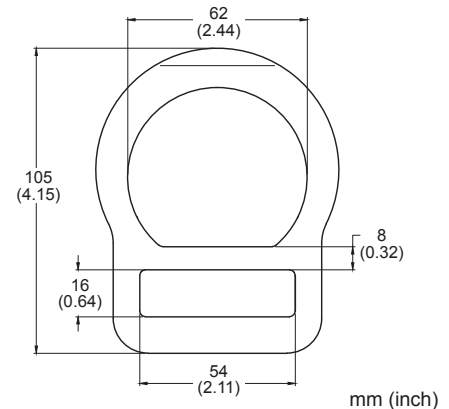

N-529

Aluminum Bent D-Ring

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.8 oz. / 78 g

Anodized

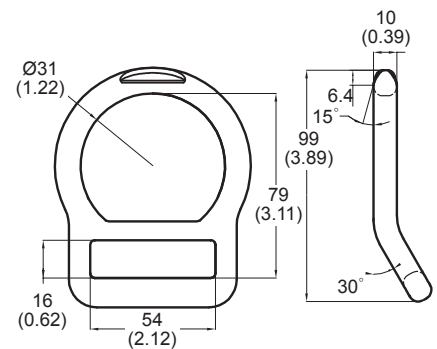

N-528A

Alum D-Ring-5M Middle Bar

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.3 oz. / 94 g

Anodized

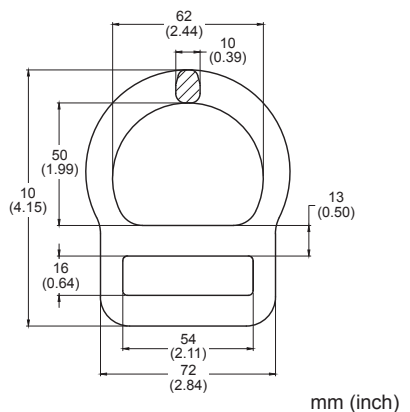

N-529A

Alum Bent D-Ring-5M Middle Bar

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.3 oz. / 94 g

Anodized

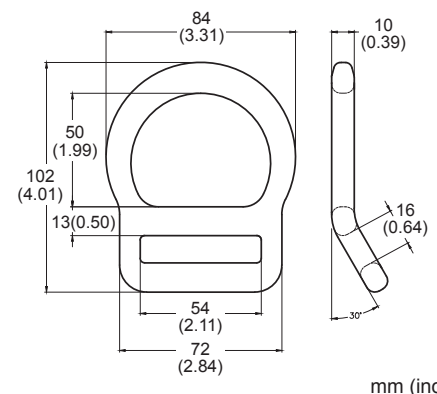

N-518


Aluminum D-Ring

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 2.7 oz. / 76 g

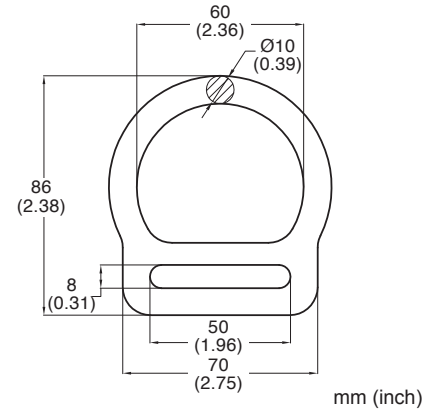

Anodized

N-519


Aluminum Bent D-Ring

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 1.8 oz. / 74 g

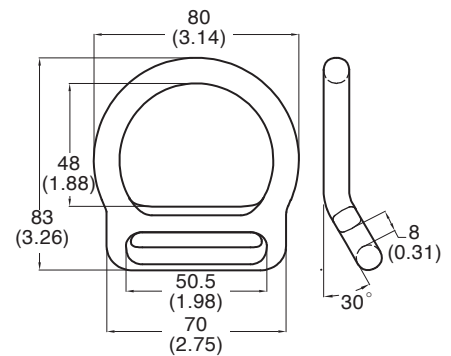

Anodized

N-5416

Aluminum D-Ring

Forged aluminum alloy


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.9 oz. / 83 g

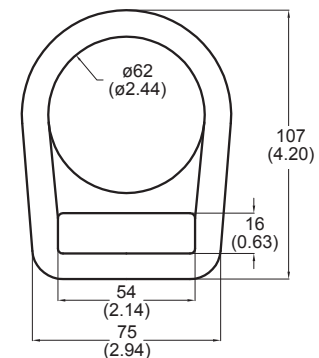

Anodized

N-540

Aluminum D-Ring

Forged aluminum alloy


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.0 oz. / 114 g

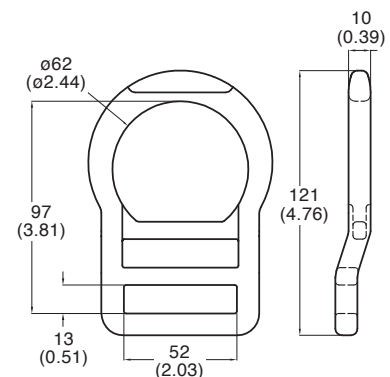

Anodized

N-5203

Aluminum D-Ring

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.2 oz. / 62 g

Anodized

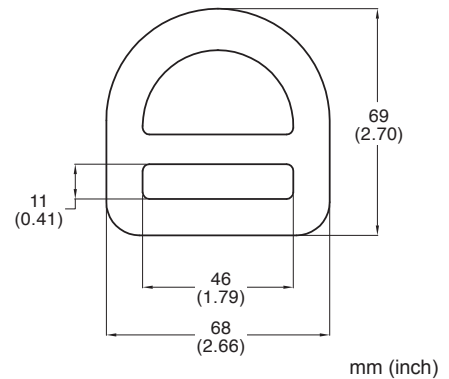

N-5204

Aluminum Bent D-Ring

Forged aluminum alloy

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 53 g

Anodized

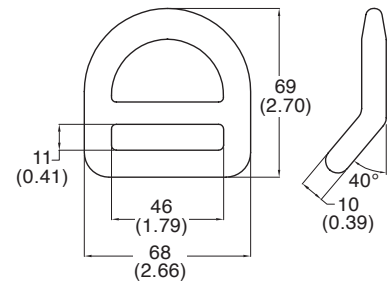

N-507


Aluminum D-Ring

Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Net weight : 3.7 oz. / 106 g

Anodized

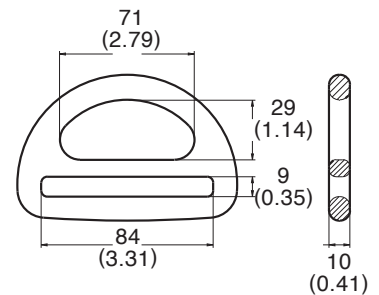

N-512


Aluminum D-Ring

Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Net weight : 1.6 oz. / 44 g

Anodized



N-5407

Aluminum D-Ring

Forged aluminum alloy


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.3 oz. / 65 g



mm (inch)

N-5407B

Aluminum Bent D-Ring

Forged aluminum alloy


100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.2 oz. / 64 g

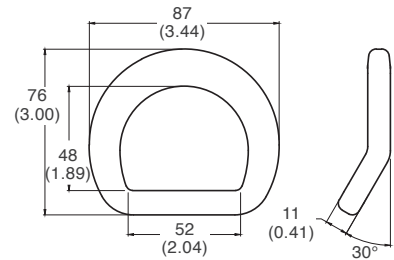

mm (inch)


N-5019

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.3 oz. / 8g



mm (inch)


N-5020

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load: 2000 lbs / 9 kN

Net weight: 0.2 oz./ 5 g

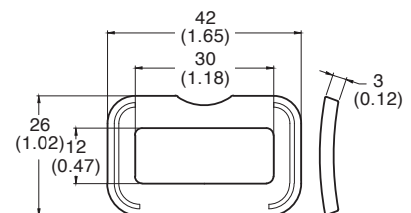

mm (inch)


N-5719

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.2 oz. / 7 g



Anodized

mm (inch)


N-5721

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.2 oz. / 5 g



Anodized

mm (inch)


N-5720

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.39 oz. / 11 g

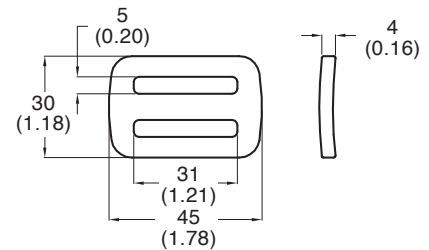

Anodized

mm (inch)


N-5722

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.35 oz. / 10 g

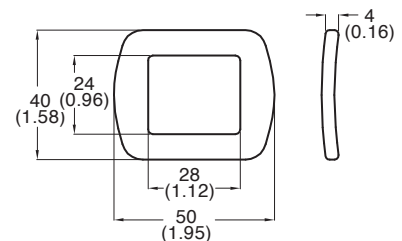

Anodized

mm (inch)


N-5740

Aluminum Quick Buckle

Sheet aluminum alloy

Min. Breaking load : 2000 lbs / 9 kN

Net weight : 0.46 oz. / 13 g

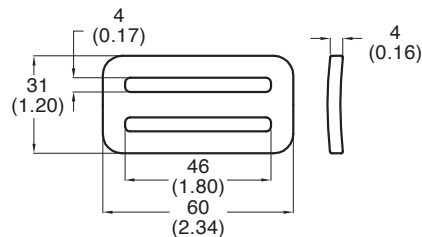

Anodized

mm (inch)

N-5741

Aluminum Quick Buckle


Sheet aluminum alloy

Min. Breaking load : 3400 lbs / 15 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.49 oz. / 14 g

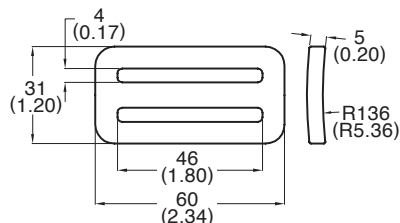

Anodized

mm (inch)

N-5742

Aluminum Quick Buckle


Sheet aluminum alloy

Min. Breaking load : 3400 lbs / 15 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.42 oz. / 12 g

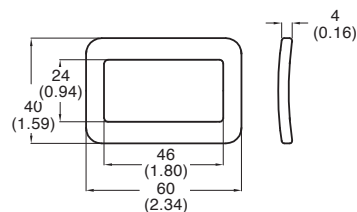

Anodized

mm (inch)

N-5748

Aluminum Quick Buckle


Sheet aluminum alloy

Min. Breaking load : 3400 lbs / 15 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 0.95 oz. / 27 g

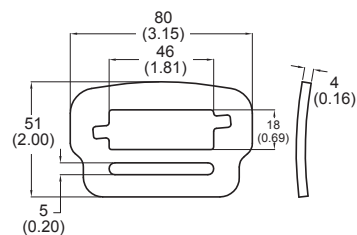

Anodized

mm (inch)


N-509

Aluminum Long Adjuster

Forged aluminum alloy

Min. Breaking load : 2200 lbs / 11 kN

Net weight : 2.0 oz. / 56 g



Anodized

mm (inch)


N-508

Aluminum Adjuster

Forged aluminum alloy

Min. Breaking load : 4500 lbs / 20 kN

Net weight : 1.3 oz. / 37 g



Anodized

mm (inch)

N-511

Aluminum Tongue Buckle with double tongue

Forged aluminum alloy


Min. Breaking load : 4000 lbs / 18 kN

Net weight : 2.0 oz. / 58 g



N-511

N-510

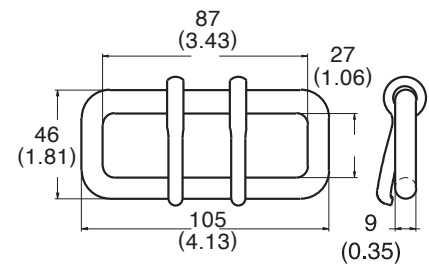

N-510

Aluminum Loop only.

without double tongue

Anodized

mm (inch)

N-5439

Aluminum Tongue Buckle


Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.3 oz. / 67 g

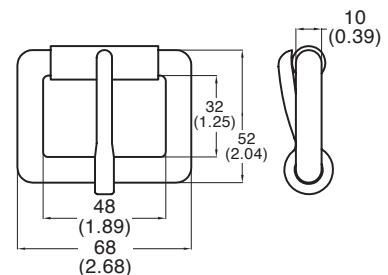

Anodized

mm (inch)

N-5212 Aluminum Adjuster Buckle


Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.7 oz. / 76 g



mm (inch)

Anodized

N-533 Aluminum Adjuster Buckle


Forged aluminum alloy

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.9 oz. / 54 g

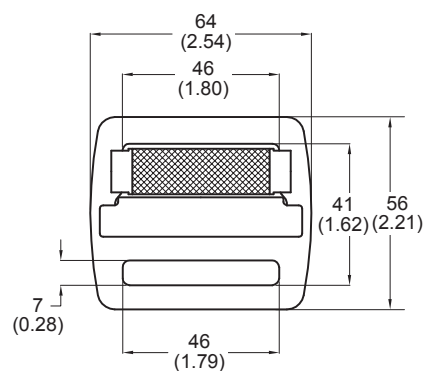

mm (inch)

Anodized

N-51428 / N-51445 / N-51460 Aluminum O Ring

Forged aluminum alloy



100% proof loaded to 3600 lbs / 16kN

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Art.No	Dimensions(mm)			Weight	
	A	B	C	(g)	(oz)
N-51428	ø12	52	28	38	1.3
N-51445	ø12	70	45	55	2.0
N-51460	ø10	80	60	50	1.8

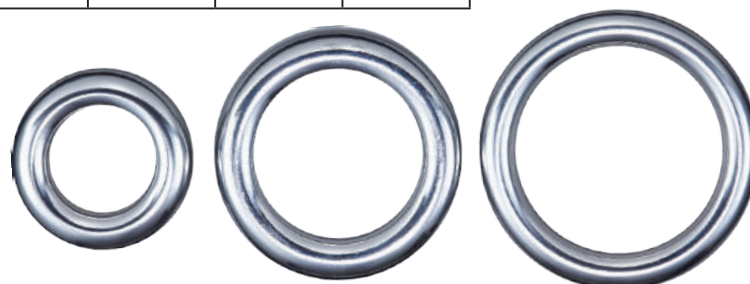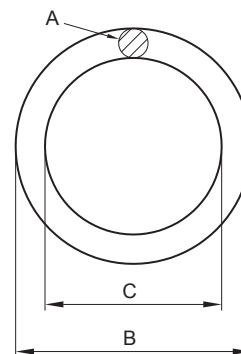

N-51428

N-51445


N-51460

Anodized

N-5877

Extra Lock Aluminum QR Buckle

Aluminum alloy





Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 4.6 oz. / 131 g

Patent US 9521882

Anodized

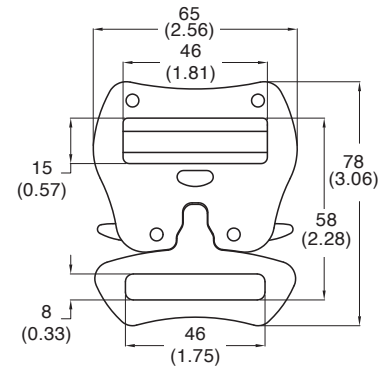

mm (inch)


N-5868

Aluminum QR Buckle

Aluminum alloy

Net weight : 1.82 oz. / 52 g

Anodized

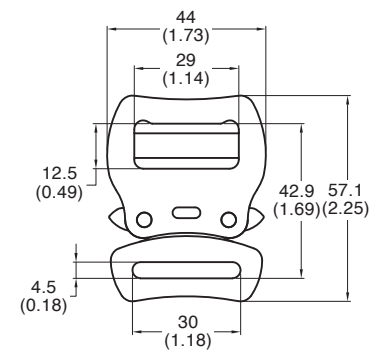

mm (inch)


N-5868T

Aluminum QR Buckle

Aluminum alloy

Net weight : 2.14 oz. / 61 g

Anodized

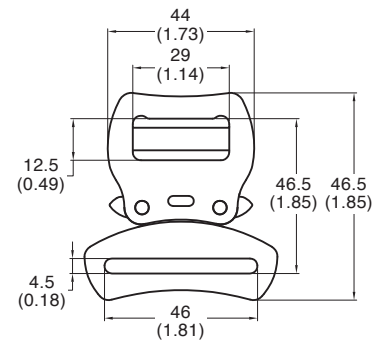

mm (inch)


N-5869T

Aluminum QR Buckle

Aluminum alloy

Net weight : 2.45 oz. / 70 g

Anodized

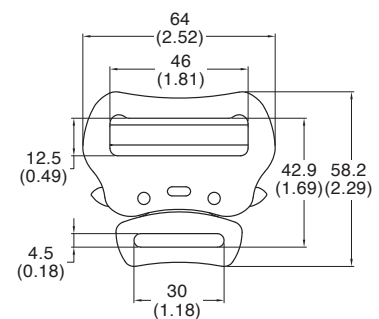


mm (inch)

N-5869


Aluminum QR Buckle

Aluminum alloy



Net weight : 2.8 oz. / 79g

Anodized

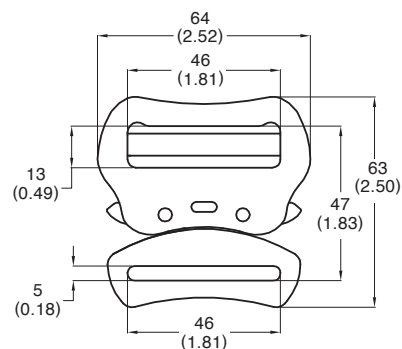


mm (inch)

N-5869-DA

Aluminum QR Buckle


Aluminum alloy



Net weight : 3.3 oz. / 93 g

Anodized

New

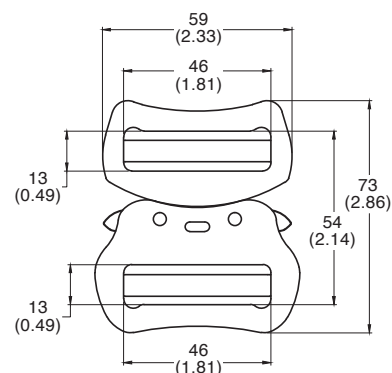


mm (inch)

N-5870A


Aluminum QR Buckle

Forged aluminum alloy



Net weight : 2.7 oz. / 76 g

Anodized

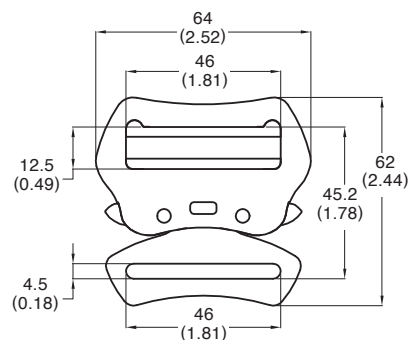


mm (inch)

N-5871

Aluminum QR Buckle

Aluminum alloy




Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.2 oz. / 93 g

Anodized

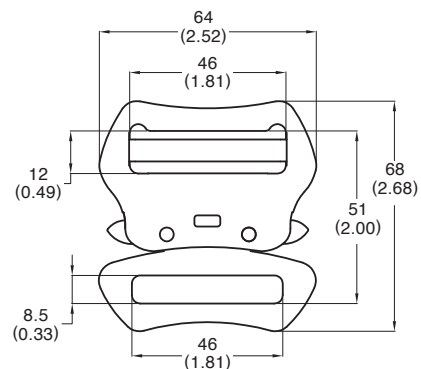

mm (inch)

N-5860

QRA Buckle


Forged aluminum alloy

Min. Breaking load : 3372 lbs / 15 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 5.3 oz. / 150 g

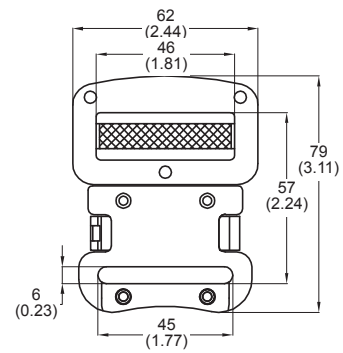

Anodized

mm (inch)

N-5861

QRA Buckle


Forged aluminum alloy

Min. Breaking load : 3372 lbs / 15 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.9 oz. / 110 g

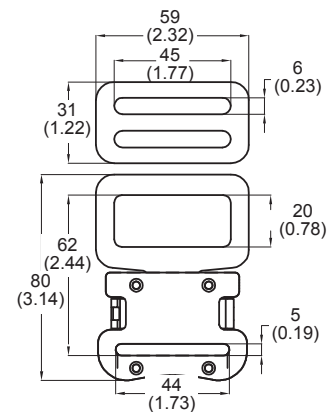

Anodized

mm (inch)

N-5862

QRA Buckle


Forged aluminum alloy

Min. Breaking Load : 3372 lbs / 15 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 3.5 oz. / 100 g




Anodized

mm (inch)

**N-5867
QRA Buckle**

Forged aluminum alloy
Min. Breaking load : 2000 lbs / 9 kN
Net weight : 3.6 oz. / 103 g

Anodized

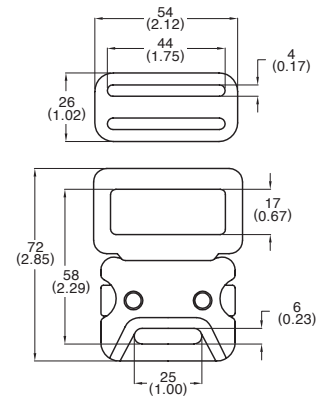


mm (inch)

**N-3591-S
Swivels - Jaw to Jaw**

Stainless Steel, SUS 304
Min Breaking load : 5000 lbs / 23 kN
Net weight : 2.5 oz. / 74 g

Polished

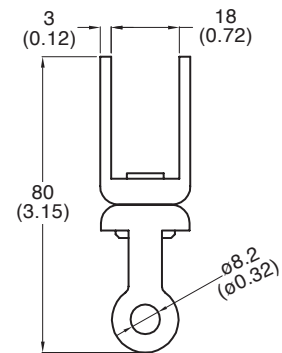


mm (inch)

**N-904-S
Anchorage Connector (5 / 8")**

Stainless steel
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 22.7 oz. / 645 g

Polished

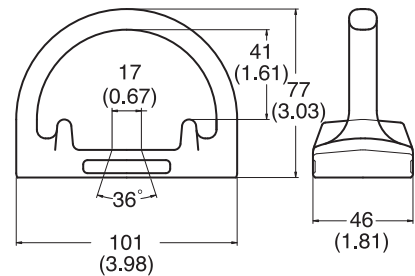


mm (inch)

**N-430-S
D-Ring, with bar**

Stainless steel, SUS 304
Min. Breaking load : 3600 lbs / 16 kN
Net weight : 3.1 oz. / 90 g

Polished

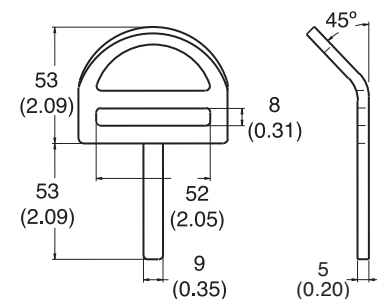

mm (inch)

N-403-S

D-Ring

Stainless steel, SUS 304

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● ANSI Z359.12-2019

● CSA Z259.12-16

Net weight : 3.0 oz. / 85 g

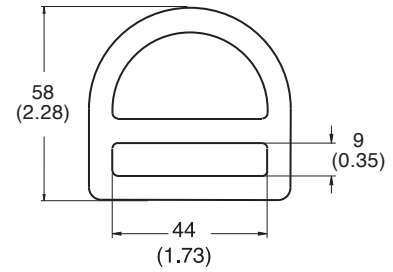

Polished

mm (inch)

N-402-S

D-Ring

Stainless steel, SUS 304


Min. Breaking load : 5000 lbs / 23 kN

Meets :

● ANSI Z359.12-2019

● CSA Z259.12-16

Net weight : 3.5 oz. / 98 g



Polished

mm (inch)


N-432-S

D-Ring

Stainless steel, SUS 304

Min. Breaking load : 4000 lbs / 18 kN

Net weight : 2.8 oz. / 80 g

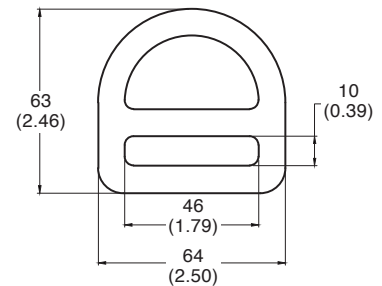

Polished

mm (inch)


N-432A-S

D Ring

Stainless steel, SUS 304

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 2.8 oz. / 80 g

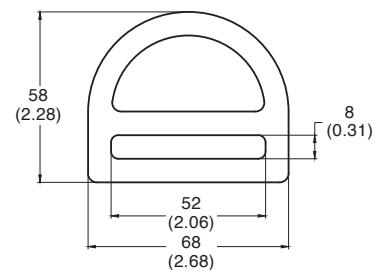


Polished

mm (inch)

**N-431-S
Bent D-Ring**

Stainless steel, SUS 304
Min. Breaking load : 4000 lbs / 18 kN
Net weight : 2.8 oz. / 80 g

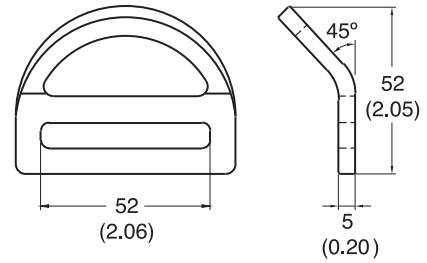


Polished

mm (inch)

**N-414-S
D-Ring**

Stainless steel, SUS 304
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 5.6 oz. / 159 g




Polished

mm (inch)

**N-415-S
D-Ring**

Stainless steel, SUS 304
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 4.9 oz. / 140 g

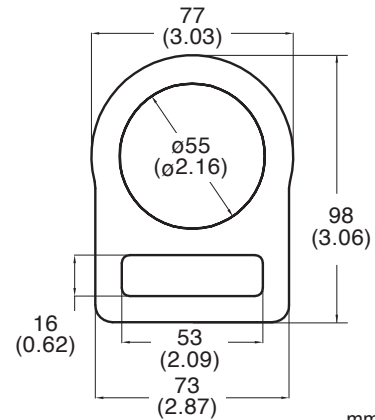


Polished

mm (inch)

**N-420-S
Quick Buckle**

Stainless steel, SUS 304
Min. Breaking load : 4000 lbs / 18 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
Net weight : 1.0 oz. / 28 g

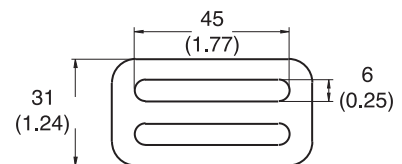

Polished

mm (inch)

N-422-S

Quick Buckle


Stainless steel, SUS 304

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.1 oz. / 31 g

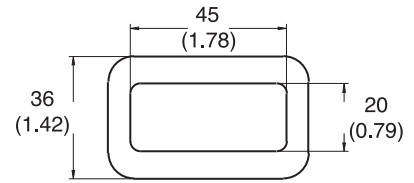

Polished

mm (inch)

N-421-S

Quick Buckle


Stainless steel, SUS 304

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 1.8 oz. / 50 g



Polished

mm (inch)

N-423-S

Quick Buckle


Stainless steel, SUS 304

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.4 oz. / 69 g

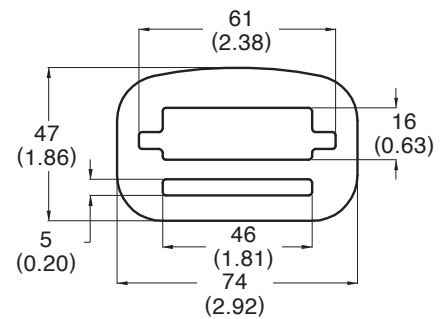

Polished

mm (inch)

N-448-S

Quick Buckle


Stainless steel, SUS 304

Min. Breaking load : 4000 lbs / 18 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 2.4 oz. / 69 g

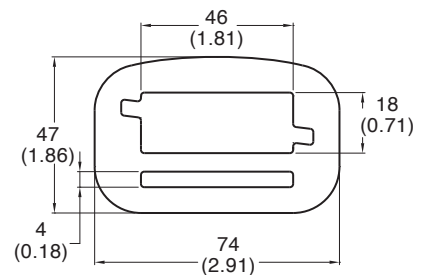

Polished

mm (inch)

N-244-0-S
Carabiner


Stainless steel, SUS 304

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 6.0 oz. / 169 g



Polished

mm (inch)

N-252-S
Carabiner


Stainless steel, SUS 304

Min. Breaking load : 5000 lbs / 23 kN

Meets :

- EN 362 : 2004

Net weight : 9.0 oz. / 255 g



Polished

mm (inch)

N-268G-S
Carabiner 3600 LBS gate strength

Stainless steel, SUS 420

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN


Meets:

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN362 : 2004

Art. No.	3600 Lbs Gate Strength	Gate Feature		Body Captive Pin
		Twist Locking	Triple Locking	
N-268G-CP-S	✓	✓		✓
N-268G-TRCP-S	✓		✓	✓

Net weight : 8.9 oz. / 254 g

Zinc Plated

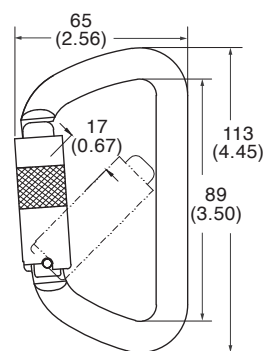

mm (inch)

N-3610-S

Rope Snap Hook

3600 LBS gate strength

Forged Stainless steel, SUS 420

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 13.7 oz. / 391 g

Zinc Plated



mm (inch)

N-3615-S

Indicator Swivel Snap Hook

3600 LBS gate strength

Forged Stainless steel, SUS 420

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :


- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 18.0 oz. / 514 g

Zinc Plated



Indicator
activation

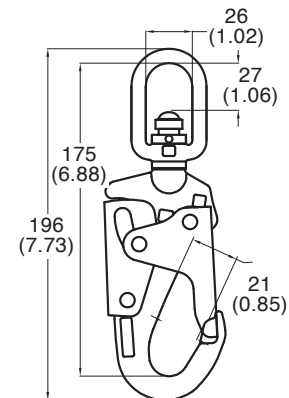

mm (inch)

N-3616-S

Swivel Snap Hook

3600 LBS gate strength

(non-Indicator)

Forged stainless Steel, SUS 420

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16

Net weight : 17.6 oz. / 504 g

Zinc plated

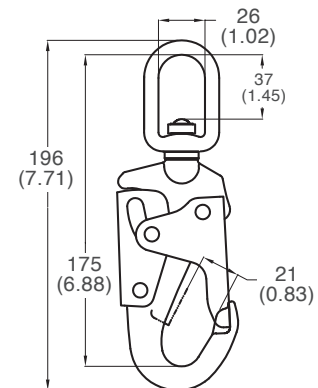

mm (inch)

YOKE



YOKE carabiners are tested by :






100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004




YOKE has expanded our carabiner offering to include Aluminum and Steel carabiners. YOKE also offers carabiners in four different versions to better meet varying workplace demands :

- Twist lock gate
- Screw lock gate
- Triple lock gate
- With or Without captive pin


YOKE **Aluminum & Steel Carabiners** the model with "G" are ANSI/CSA compliant for 3600 lbs gate strength.

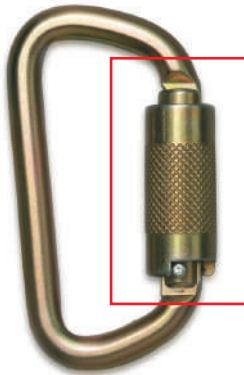

Screw Gate



Twist Locking



Triple Locking (TR)




Captive Pin (CP)

Nose Design



The "SNAG FREE" icon means that the carabiner body / gate has a smooth notch where the nose of the carabiner and gate meet. this smooth area prevents the carabiner from becoming 'snagged' on attachment points such as webbing, d-ring, etc.



N-250GK


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-250GK	✓		✓		
N-250GK-TR	✓			✓	
N-250GK-CP	✓		✓		✓
N-250GK-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.6 oz. / 216 g

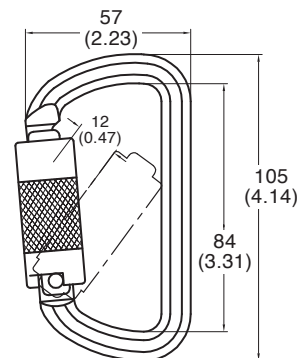

mm (inch)

N-250G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-250-0		✓			
N-250			✓		
N-250G	✓		✓		
N-250G-TR	✓			✓	
N-250G-CP	✓		✓		✓
N-250G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.6 oz. / 215 g.

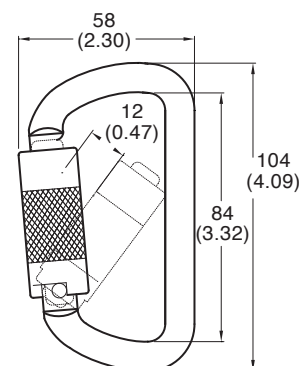

mm (inch)

N-244G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-244-0		✓			
N-244			✓		
N-244G	✓		✓		
N-244G-TR	✓			✓	
N-244G-CP	✓		✓		✓
N-244G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.6 oz. / 215 g.

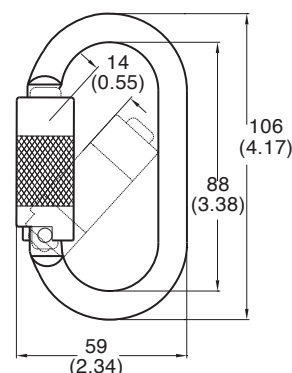

N-244-0

mm (inch)

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004


N-252GK**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-252GK	✓		✓		
N-252GK-TR	✓			✓	
N-252GK-CP	✓		✓		✓
N-252GK-TRCP	✓			✓	✓

Zinc Plated

Net weight : 8.8 oz. / 252 g.



mm (inch)


N-252G**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-252-0		✓			
N-252			✓		
N-252G	✓		✓		
N-252G-TR	✓			✓	
N-252G-CP	✓		✓		✓
N-252G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 8.8 oz. / 250 g.



mm (inch)


N-256G**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-256-0		✓			
N-256			✓		
N-256G	✓		✓		
N-256G-TR	✓			✓	
N-256G-CP	✓		✓		✓
N-256G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 9.8 oz. / 279 g.

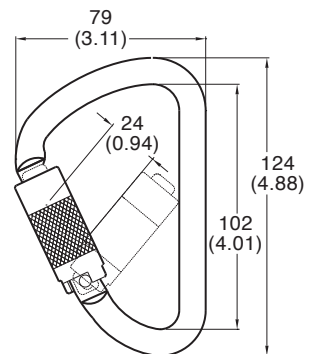

mm (inch)

N-245G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-245-0		✓			
N-245			✓		
N-245G	✓		✓		
N-245G-TR	✓			✓	
N-245G-CP	✓		✓		✓
N-245G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.1 oz. / 200 g.



mm (inch)

N-251G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-251-0		✓			
N-251			✓		
N-251G	✓		✓		
N-251G-TR	✓			✓	
N-251G-CP	✓		✓		✓
N-251G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 8.0 oz. / 226 g.

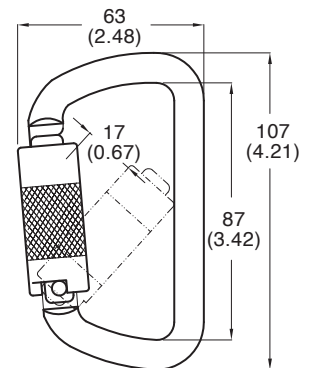

mm (inch)

N-268G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-268-0		✓			
N-268			✓		
N-268G	✓		✓		
N-268G-TR	✓			✓	
N-268G-CP	✓		✓		✓
N-268G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 9.9 oz. / 280 g.



mm (inch)

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004


N-267G**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-267-0		✓			
N-267			✓		
N-267G	✓		✓		
N-267G-TR	✓			✓	
N-267G-CP	✓		✓		✓
N-267G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 7.7 oz. / 219 g.



mm (inch)


N-246G**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-246-0		✓			
N-246			✓		
N-246G	✓		✓		
N-246G-TR	✓			✓	
N-246G-CP	✓		✓		✓
N-246G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 10.1 oz. / 288 g.

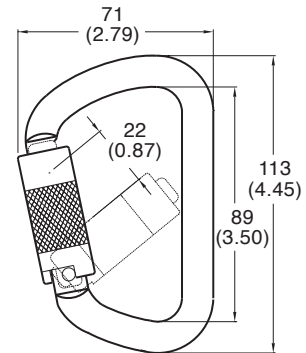

mm (inch)


N-254G**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-254-0		✓			
N-254-CP			✓		✓
N-254-TRCP				✓	✓
N-254G	✓		✓		
N-254G-TR	✓			✓	
N-254G-CP	✓		✓		✓
N-254G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 12.9 oz. / 369 g.



mm (inch)

N-248G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body Captive Pin
		Screw gate	Twist Locking	Triple Locking	
N-248-0		✓			
N-248			✓		
N-248G	✓		✓		
N-248G-TR	✓			✓	
N-248G-CP	✓		✓		✓
N-248G-TRCP	✓			✓	✓

Zinc Plated

Net weight : 10.5 oz. / 299 g.



mm (inch)

N-261G


Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature		
		Screw gate	Twist Locking	Triple Locking
N-261-0		✓		
N-261			✓	
N-261G	✓		✓	
N-261G-TR	✓			✓

Zinc Plated

Net weight : 10.7 oz. / 305 g.

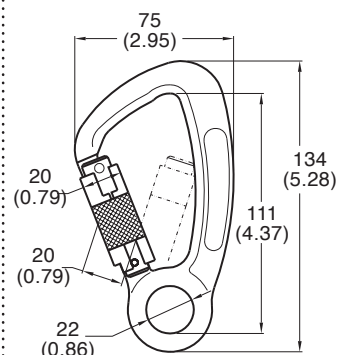

mm (inch)

N-2615G

Indicator Swivel Steel Carabiner


3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature		
		Screw gate	Twist Locking	Triple Locking
N-2615-0		✓		
N-2615			✓	
N-2615G	✓		✓	
N-2615G-TR	✓			✓

Zinc Plated

Net weight : 14.9 oz. / 423 g.

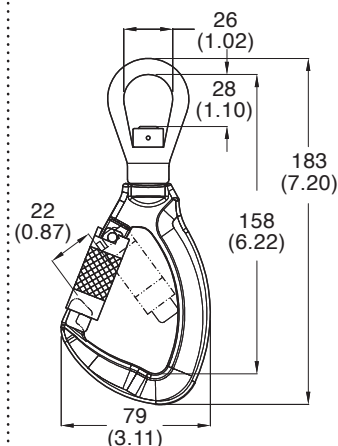


mm (inch)

100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004

N-247G-CP**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-247-0		✓			
N-247			✓		
N-247G-CP	✓		✓		✓
N-247G-TRCP	✓			✓	✓



Zinc Plated


Net weight : 11.0 oz. / 313 g.

mm (inch)

N-258G-CP**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-258			✓		
N-258G-CP	✓		✓		✓
N-258G-TRCP	✓			✓	✓

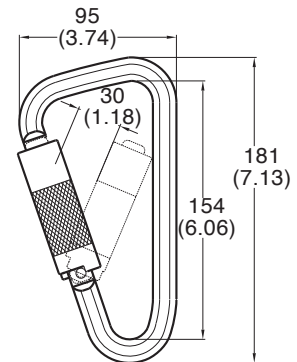

Zinc Plated


Net weight : 22.0 oz. / 625 g.

mm (inch)

N-263G-CP**Steel Carabiner** 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-263-0		✓			
N-263			✓		
N-263G-CP	✓		✓		✓
N-263G-TRCP	✓			✓	✓

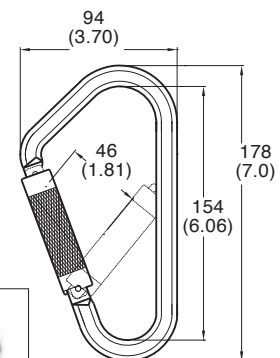

Zinc Plated

Net weight : 15.8 oz. / 447 g.


mm (inch)

N-259G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-259			✓		
N-259G-CP	✓		✓		✓
N-259G-TRCP	✓			✓	✓



Zinc Plated

Net weight : 27.3 oz. / 774 g.


mm (inch)

N-265G-CP

Steel Carabiner 3600 LBS gate strength

Alloy steel, heat treated

Art. No.	3600 Lbs Gate Strength	Gate Feature			Body
		Screw gate	Twist Locking	Triple Locking	Captive Pin
N-265			✓		
N-265G-CP	✓		✓		✓
N-265G-TRCP	✓			✓	✓



Zinc Plated

Net weight : 28.8 oz. / 817 g.

mm (inch)

Steel Carabiner

Art. NO.	N-250G	N-244G	N-245G	N-251G	N-267G	N-252G	N-246G	N-268G	N-248G
Ø mm (inch)	10 (0.39)	10 (0.39)	10 (0.39)	10 (0.39)	10 (0.39)	11 (0.43)	12 (0.47)	12 (0.47)	12 (0.47)
Breaking load minimum (kN)	40 (kN)	25 (kN)	25 (kN)	30 (kN)	30 (kN)	41 (kN)	45 (kN)	50 (kN)	50 (kN)
Gate opening mm (inch)	12 (0.47)	14 (0.55)	15 (0.59)	17 (0.67)	17 (0.67)	19 (0.75)	22 (0.87)	17 (0.67)	24 (0.94)
O.L. mm (inch)	104 (4.09)	106 (4.17)	106 (4.17)	107 (4.21)	108 (4.25)	111 (4.37)	113 (4.45)	113 (4.45)	119 (4.68)

Steel Carabiner

Art. NO.	N-247G	N-256G	N-254G	N-261G	N-263G	N-258G	N-2615G	N-259G	N265G
Ø mm (inch)	12 (0.47)	11 (0.43)	18 (0.71)	--	12 (0.47)	14 (0.55)	--	14 (0.55)	14 (0.55)
Breaking load minimum (kN)	30 (kN)	45 (kN)	50 (kN)	45 (kN)	35 (kN)	50 (kN)	35 (kN)	35 (kN)	45 (kN)
Gate opening mm (inch)	27 (1.06)	24 (0.94)	21 (0.82)	20 (0.79)	46 (1.81)	30 (1.18)	22 (0.87)	51 (2.01)	54 (2.13)
O.L. mm (inch)	123 (4.84)	124 (4.88)	134 (5.28)	134 (5.28)	178 (7.01)	181 (7.13)	183 (7.20)	217 (8.54)	221 (8.70)



YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004



Screw Gate



Twist Locking



Triple Locking
(TR)




Captive Pin
(CP)

N-281 Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-281-0	✓			
N-281		✓		
N-281-TR			✓	
N-281-CP		✓		✓
N-281-TRCP			✓	✓

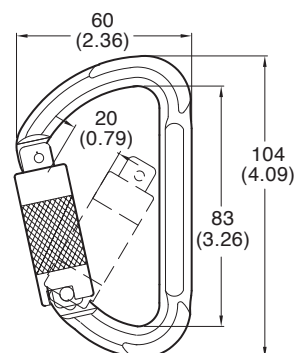


Anodized Net weight : 2.3 oz. / 66 g.

mm (inch)

N-271 Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-271-0	✓			
N-271		✓		
N-271-TR			✓	
N-271-CP		✓		✓
N-271-TRCP			✓	✓



Anodized Net weight : 3.4 oz. / 96 g.

mm (inch)


N-282

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-282-0	✓			
N-282		✓		
N-282-TR			✓	
N-282-CP		✓		✓
N-282-TRCP			✓	✓

Anodized Net weight : 3.0 oz. / 86 g.



mm (inch)


N-283

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-283-0	✓			
N-283		✓		
N-283-TR			✓	
N-283-CP		✓		✓
N-283-TRCP			✓	✓

Anodized Net weight : 3.5 oz. / 98 g.



mm (inch)


N-284

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-284-0	✓			
N-284		✓		
N-284-TR			✓	
N-284-CP		✓		✓
N-284-TRCP			✓	✓

Anodized Net weight : 3.5 oz. / 98 g.



mm (inch)

YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004


YOKE

N-274

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-274-0	✓			
N-274		✓		
N-274-TR			✓	
N-274-CP		✓		✓
N-274-TRCP			✓	✓



mm (inch)



Anodized Net weight : 4.0 oz. / 114 g.

N-272

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-272-0	✓			
N-272		✓		
N-272-TR			✓	
N-272-CP		✓		✓
N-272-TRCP			✓	✓

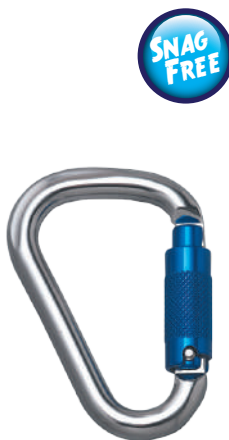

mm (inch)


Anodized Net weight : 3.5 oz. / 98 g.

N-276

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-276-0	✓			
N-276		✓		
N-276-TR			✓	
N-276-CP		✓		✓
N-276-TRCP			✓	✓



mm (inch)


Anodized Net weight : 3.2 oz. / 91 g.

N-270

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-270-0	✓			
N-270		✓		
N-270-TR			✓	
N-270-CP		✓		✓
N-270-TRCP			✓	✓



Anodized Net weight : 2.8 oz. / 78 g.


mm (inch)

N-273

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-273-0	✓			
N-273		✓		
N-273-TR			✓	
N-273-CP		✓		✓
N-273-TRCP			✓	✓



Anodized Net weight : 3.0 oz. / 86 g.


mm (inch)

N-275

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	Screw Gate	Twist Locking	Triple Locking
N-275-0	✓		
N-275		✓	
N-275-TR			✓

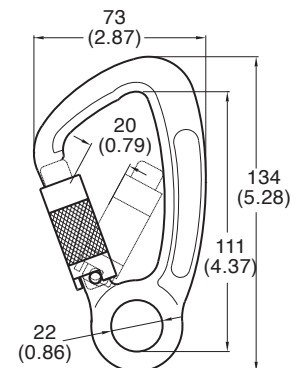

Anodized Net weight : 3.3 oz. / 93 g.

mm (inch)

YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004




N-287

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-287-0	✓			
N-287		✓		
N-287-TR			✓	
N-287-CP		✓		✓
N-287-TRCP			✓	✓

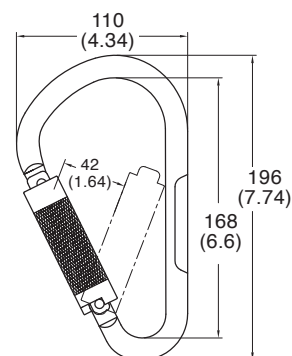

Anodized Net weight : 7.2 oz. / 205 g.


mm (inch)

N-277

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		Body
	Twist Locking	Triple Locking	Captive Pin
N-277-CP	✓		✓
N-277-TRCP		✓	✓



Anodized Net weight : 13.5 oz. / 384 g.


mm (inch)

N-278

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		Body
	Twist Locking	Triple Locking	Captive Pin
N-278-CP	✓		✓
N-278-TRCP		✓	✓

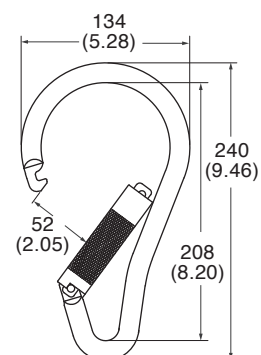

Anodized Net weight : 13.0 oz. / 368 g.

mm (inch)


N-2750

Swivel Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	Screw Gate	Twist Locking	Triple Locking
N-2750-0	✓		
N-2750		✓	
N-2750-TR			✓

Anodized Net weight : 7.5 oz. / 214 g.

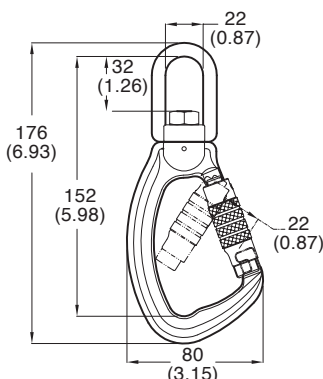

mm (inch)


N-2852

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2852-0	✓			
N-2852		✓		
N-2852-TR			✓	
N-2852-CP		✓		✓
N-2852-TRCP			✓	✓

Anodized Net weight : 3.7 oz. / 108 g.



mm (inch)


N-2854

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2854-0	✓			
N-2854		✓		
N-2854-TR			✓	
N-2854-CP		✓		✓
N-2854-TRCP			✓	✓

Anodized Net weight : 3.6 oz. / 103 g.



mm (inch)

YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004


YOKE

N-2855

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	Screw Gate	Twist Locking	Triple Locking
N-2855		✓	
N-2855-TR			✓

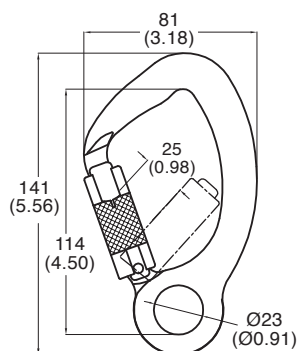

Anodized Net weight : 4.6 oz. / 132 g.


mm (inch)

N-2857


Aluminum Indicator Swivel Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	Screw Gate	Twist Locking	Triple Locking
N-2857		✓	
N-2857-TR			✓



Indicator activation

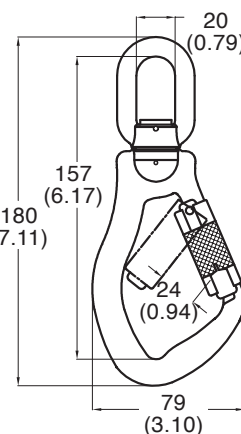

Anodized Net weight : 6.2 oz. / 177 g.


mm (inch)

N-2857 / 0

Aluminum Swivel Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	Screw Gate	Twist Locking	Triple Locking
N-2857 / 0-0	✓		
N-2587 / 0-TR			✓

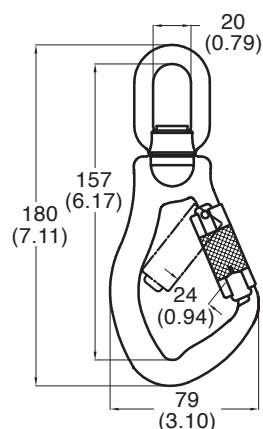

Anodized Net weight : 6.1 oz. / 172 g.

mm (inch)


N-2859

Aluminum Carabiner

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	Screw Gate	Twist Locking	Triple Locking	Captive Pin
N-2859-0	✓			
N-2859		✓		
N-2859-TR			✓	
N-2859-CP		✓		✓
N-2859-TRCP			✓	✓

Anodized Net weight : 4.1 oz. / 118 g.



mm (inch)

YOKE Aluminum carabiners are tested by :

Min. Breaking load : 5000 lbs / 23 kN
Meets EN 362:2004

YOKE

Aluminum Carabiner

										
Art. NO.	N-281	N-2859	N-270	N-282	N-272	N-273	N-276	N-271	N-283	N-2854
Ø mm (inch)	10 (0.39)	--	11 (0.43)	11 (0.43)	12 (0.47)	--	--	12 (0.47)	12 (0.47)	--
Breaking load minimum (kN)	23 (kN)	23 (kN)	23 (kN)	23 (kN)	23 (kN)	30 (kN)	24 (kN)	25 (kN)	23 (kN)	25 (kN)
Gate opening mm (inch)	20 (0.79)	26 (1.02)	19 (0.75)	18 (0.71)	23 (0.91)	22 (0.87)	23 (0.91)	22 (0.87)	22 (0.87)	27 (1.06)
O.L. mm (inch)	104 (4.09)	105 (4.13)	109 (4.29)	110 (4.33)	112 (4.41)	112 (4.41)	112 (4.41)	113 (4.45)	113 (4.45)	122 (4.80)

Aluminum Carabiner

											
Art. NO.	N-274	N-2852	N-284	N-275	N-2855	N-2750	N-2857	N-2857 / 0	N-287	N-277	N-278
Ø mm (inch)	12 (0.47)	--	11 (0.43)	--	--	--	--	--	15 (0.59)	16 (0.63)	16 (0.63)
Breaking load minimum (kN)	25 (kN)	23 (kN)	23 (kN)	28 (kN)	30 (kN)	23 (kN)	30 (kN)	30 (kN)	23 (kN)	35 (kN)	23 (kN)
Gate opening mm (inch)	23 (0.91)	25 (0.98)	25 (0.98)	20 (0.79)	25 (0.98)	22 (0.87)	24 (0.94)	24 (0.94)	42 (1.64)	52 (2.05)	52 (2.05)
O.L. mm (inch)	124 (4.88)	124 (4.88)	125 (4.92)	134 (5.28)	141 (5.55)	176 (6.93)	180 (7.09)	180 (7.09)	185 (7.74)	225 (8.85)	239 (9.41)




100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004

N-2852G**Aluminum Carabiner** 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2852G	✓	✓		
N-2852G-TR	✓		✓	
N-2852G-CP	✓	✓		✓
N-2852G-TRCP	✓		✓	✓

Anodized Net weight : 4.6 oz. / 131 g




mm (inch)

N-2853G**Aluminum Carabiner** 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2853G	✓	✓		
N-2853G-TR	✓		✓	
N-2853G-CP	✓	✓		✓
N-2853G-TRCP	✓		✓	✓

Anodized Net weight : 5.3 oz. / 149.1 g




mm (inch)

N-2854G**Aluminum Carabiner** 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2854G	✓	✓		
N-2854G-TR	✓		✓	
N-2854G-CP	✓	✓		✓
N-2854G-TRCP	✓		✓	✓

Anodized Net weight : 4.37 oz. / 124 g




mm (inch)

N-2855G

Aluminum Carabiner 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2855G	✓	✓	
N-2855G-TR	✓		✓



mm (inch)


Anodized Net weight : 5.3 oz. / 149.1 g

N-2857G


Aluminum Indicator Swivel Carabiner

3600 LBS gate strength Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2857G	✓	✓	
N-2857G-TR	✓		✓



Indicator activation

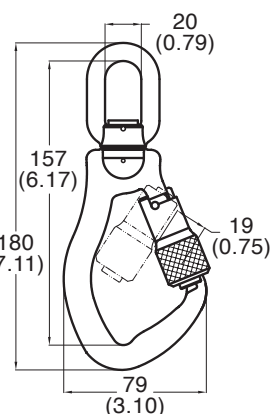

mm (inch)


Anodized Net weight : 7.2 oz. / 205 g

N-2857 / OG

Aluminum Swivel Carabiner

3600 LBS gate strength Aluminum alloy, SAE 7075

Art. No.	Gate Feature		
	3600Lbs Gate Strength	Twist Locking	Triple Locking
N-2857 / OG	✓	✓	
N-2857 / OG-TR	✓		✓

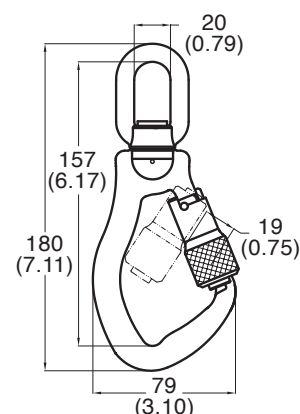

mm (inch)

Anodized Net weight : 7.0 oz. / 200 g


100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets ANSI Z359.12-2019 CSA Z259.12-16 EN 362:2004

N-2859G**Aluminum Carabiner** 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2859G	✓	✓		
N-2859G-TR	✓		✓	
N-2859G-CP	✓	✓		✓
N-2859G-TRCP	✓		✓	✓

Anodized Net weigh : 5.0 oz. / 142 g




mm (inch)

N-2868G**Aluminum Carabiner** 3600 LBS gate strength

Aluminum alloy, SAE 7075

Art. No.	Gate Feature			Body
	3600Lbs Gate Strength	Twist Locking	Triple Locking	Captive Pin
N-2868G-CP	✓	✓		✓
N-2868G-TRCP	✓		✓	✓

Anodized Net weight : 15.9 oz. / 450 g



mm (inch)

SNAG FREE Aluminum Carabiner

Art.NO.	N-2859G	N-2854G	N-2852G	N-2853G	N-2855G	N-2857G	N-2868G
Breaking load minimum(kN)	23 kN	25 kN	23 kN	40 kN	30 kN	30 kN	25 kN
Gate opening mm(inch)	21 (0.83)	24 (0.94)	20 (0.79)	22 (0.87)	22 (0.87)	19 (0.75)	51 (2.01)
O.L mm(inch)	105 (4.13)	122 (4.80)	124 (4.88)	124 (4.88)	141 (5.55)	180 (7.09)	237 (9.33)



This fall arrester is to be used as **only as a component** in a work positioning or fall arrest system. As part of this system, the fall arrester must be tested prior to distribution to the end user, with all other components in the system including - but not limited to - lifeline, energy absorber, connecting hardware, fall protection harness, etc. This testing must be in compliance with and conducted in accordance to ANSI, OSHA, CSA, and any other applicable standard(s). It is the system manufacturer's responsibility to ensure the compatibility of this fall arrester with the system and to provide applicable instructions to end user. These instructions must detail proper use of the fall arrester, including correct orientation (UP position), as well as how to safely adjust the position of the fall arrester on the lifeline.



N-610 Fall Arrester (Open type)

Stainless steel

For Rope : 16 mm (5 / 8 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 20.2 oz. / 572 g

Polished



Open for attachment

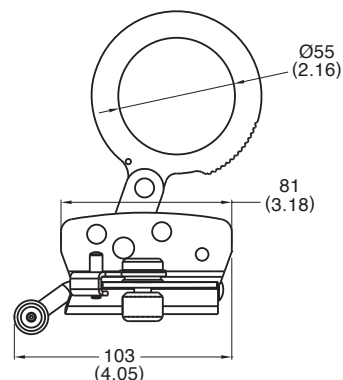

mm (inch)

N-610LY Fall Arrester with integral lanyard

Stainless steel

For Rope : 16 mm (5 / 8 ")

Max elongation : 61 in (156 cm)

Max arresting force : 1300 lbs (6 kN)

Max freefall : 3.28 ft (1 m)

Worker mass range : 100-350 lbs (45-160 kgs)

Min. Breaking load : 3600 lbs / 16 kN

Meets :

- CSA Z259.2.5-17
- ANSI Z359.15-14

Net weight : 42.28 oz. / 1208g

Polished



mm (inch)

N-630 Fall Arrester (Open type)

Steel

For Rope : 16 mm (5 / 8 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weigh : 20.2 oz. / 572 g

Zinc Plated



Open for attachment

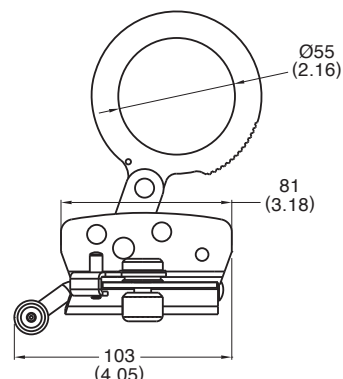

mm (inch)

N-630LY Fall Arrester with integral lanyard

Steel

For Rope : 16 mm (5 / 8 ")

Max elongation : 61 in (156 cm)

Max arresting force : 1300 lbs (6 kN)

Max freefall : 3.28 ft (1 m)

Worker mass range : 100-350 lbs (45-160 kgs)

Min. Breaking load : 3600 lbs / 16 kN

Meets :

- CSA Z259.2.5-17
- ANSI Z359.15-14

Net weight : 42.67 oz. / 1208 g

Zinc Plated



mm (inch)

N-616 Fall Arrester (Open type)

Stainless steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 20.2 oz. / 572 g

Polished



Open for attachment

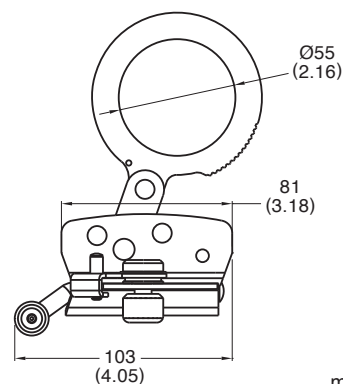

mm (inch)

N-636 Fall Arrester (Open type)

Steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 20.8 oz. / 589 g

Zinc Plated



Open for attachment

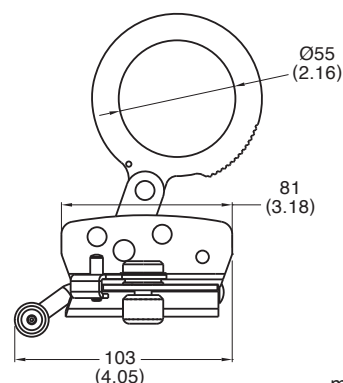

mm (inch)

N-617 Fall Arrester (Open type)

Stainless steel

For Rope : 14 - 16 mm (9 / 16 " - 5 / 8 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 15.1 oz. / 428 g

Polished



Open for attachment



mm (inch)

N-637 Fall Arrester (Open type)

Steel

For Rope : 14 - 16 mm (9 / 16 " - 5 / 8 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 15.1 oz. / 428 g

Zinc Plated



Open for attachment



mm (inch)

This fall arrester is to be used as **only as a component** in a work positioning or fall arrest system. As part of this system, the fall arrester must be tested prior to distribution to the end user, with all other components in the system including - but not limited to - lifeline, energy absorber, connecting hardware, fall protection harness, etc. This testing must be in compliance with and conducted in accordance to ANSI, OSHA, CSA, and any other applicable standard(s). It is the system manufacturer's responsibility to ensure the compatibility of this fall arrester with the system and to provide applicable instructions to end user. These instructions must detail proper use of the fall arrester, including correct orientation (UP position), as well as how to safely adjust the position of the fall arrester on the lifeline.

YOKE

N-618 Fall Arrester (Open type)

Stainless steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")



Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 20.3 oz. / 580 g

Polished

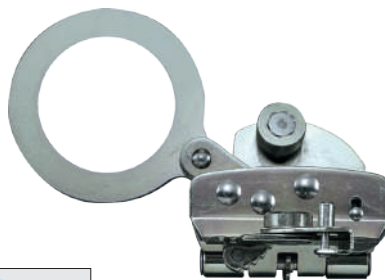

Open for attachment



mm (inch)

N-638 Fall Arrester (Open type)

Steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 20.5 oz. / 586 g

Zinc Plated

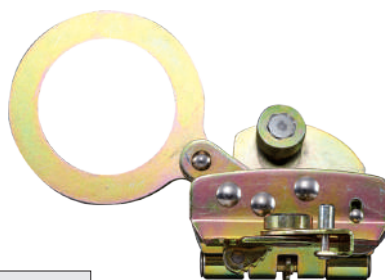

Open for attachment



mm (inch)

N-619T Fall Arrester With Parking Feature (Open type)

Stainless Steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")

Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 17.5 oz. / 499 g

Polished



Open for attachment



mm (inch)

N-619 Fall Arrester (Open type)

Stainless Steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 14.9 oz. / 428 g

Polished



Open for attachment



mm (inch)

N-639 Fall Arrester (Open type)

Steel

For Rope : 12.7 - 14 mm (1 / 2 " - 9 / 16 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :


- ANSI Z359.1
- EN 353-2

Net weight : 15.1 oz. / 428 g

Zinc Plated



Open for attachment



mm (inch)

N-606AP Fall Arrester-Positioning

Stainless steel

For Rope : 16 mm (5/8")

Min. Breaking load : 3600 lbs / 16 kN

Meets:


- ANSI Z359.1
- EN 353-2

Net weight : 25.9 oz. / 733 g

Polished



Open for attachment



mm (inch)

N-602-12 Fall Arrester with Eye

Steel

For Rope : 12 mm (1 / 2 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :

- ANSI Z359.1
- EN 358

Net weight : 14.4 oz. / 441 g

Zinc Plated



mm (inch)

N-602 Fall Arrester with Eye

Steel

For Rope : 16 mm (5 / 8 ")


Min. Breaking load : 3600 lbs / 16 kN

Meets :

- ANSI Z359.1
- EN 353-2

Net weight : 16.2 oz. / 458 g

Zinc Plated



mm (inch)


This fall arrester is to be used as **only as a component** in a work positioning or fall arrest system. As part of this system, the fall arrester must be tested prior to distribution to the end user, with all other components in the system including - but not limited to - lifeline, energy absorber, connecting hardware, fall protection harness, etc. This testing must be in compliance with and conducted in accordance to ANSI, OSHA, CSA, and any other applicable standard(s). It is the system manufacturer's responsibility to ensure the compatibility of this fall arrester with the system and to provide applicable instructions to end user. These instructions must detail proper use of the fall arrester, including correct orientation (UP position), as well as how to safely adjust the position of the fall arrester on the lifeline.



N-668 Fall Arrester

Aluminum alloy
Rope size : 11-13 mm
Certified with 11mm rope
Meets:
● EN353-2
● EN358
Net weight : 5.6 oz. / 159 g

Anodized

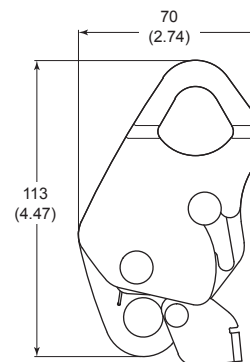


mm (inch)

N-620/N-622 Cable Fall Arrester With Eye

Stainless steel
Min. Breaking load : 3600 lbs / 16 kN
Meets :
● EN 353-2

Art No.	Wire Rope	Net Weight
N-620	8mm(5/16")	16.4 oz./465g
N-622	10mm(3/8")	16.9oz./478g

Polished

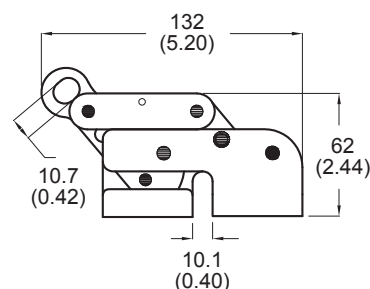

mm (inch)

N-621/N-623 Cable Fall Arrester With Eye


Stainless steel
Min. Breaking load : 3600 lbs / 16 kN
Meets :
● ANSI Z359.1
● EN 353-2

Art No.	Wire Rope	Net Weight
N-621	8mm(5/16")	16.8 oz./477g
N-623	10mm(3/8")	17.3oz./490g

Polished



Anti-upside down

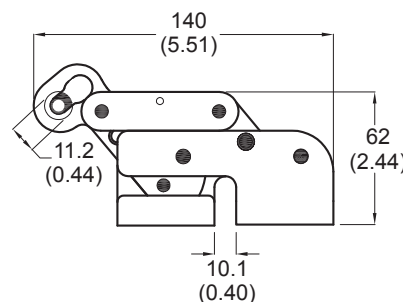


mm (inch)

N-604 Fall Arrester with Hook

Steel
For Rope : 16 mm (5 / 8 ")
Min. Breaking load : 3600 lbs / 16 kN
Meets :
● ANSI Z359.1
● EN 353-2
Net weight : 19.3 oz. / 547 g


Zinc Plated

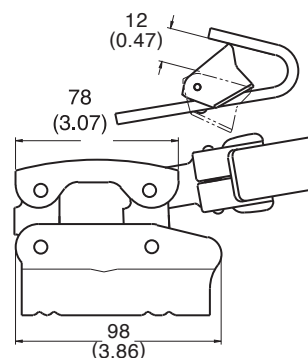

mm (inch)

N-650 Fall Arrester With Fixed Cam

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 5.8 oz. / 166 g




Anodized

mm (inch)

N-650B Fall Arrester With Removable Cam

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.2 oz. / 177 g




Anodized

mm (inch)

N-651 Rope Adjuster Grab With Fixed Cam

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.1 oz. / 173 g
Not for fall arrest




Anodized

mm (inch)

N-651B Rope Adjuster Grab With Removable Cam

Aluminum alloy
Rope size : Ø 9 mm — Ø 13 mm
Net weight : 6.4 oz. / 182 g
Not for fall arrest



Anodized

mm (inch)


This fall arrester is to be used as **only as a component** in a work positioning or fall arrest system. As part of this system, the fall arrester must be tested prior to distribution to the end user, with all other components in the system including - but not limited to - lifeline, energy absorber, connecting hardware, fall protection harness, etc. This testing must be in compliance with and conducted in accordance to ANSI, OSHA, CSA, and any other applicable standard(s). It is the system manufacturer's responsibility to ensure the compatibility of this fall arrester with the system and to provide applicable instructions to end user. These instructions must detail proper use of the fall arrester, including correct orientation (UP position), as well as how to safely adjust the position of the fall arrester on the lifeline.



N-670 Positioning Grab

Stainless steel / Aluminum alloy
Rope size : Ø 14 mm — Ø 16 mm
Net weight : 8.3 oz. / 238 g

Polished

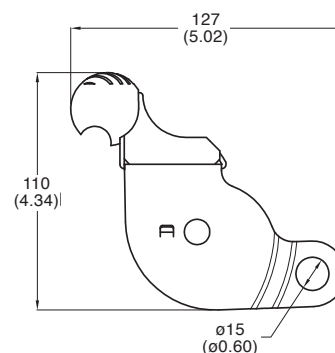

mm (inch)


N-660 Fall Arrester

Aluminum alloy
Rope size : Ø 12 mm
Net weight : 7.4 oz. / 210 g

N-660-16

Rope size : Ø 16 mm

Anodized


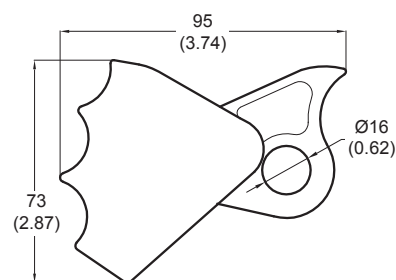


mm (inch)

N-608 Rope Tensioner

Steel, heat treated
Rope Size : 16 mm (5 / 8 ")
Net weight : 58.6 oz. / 1.66 kg

Zinc Plated

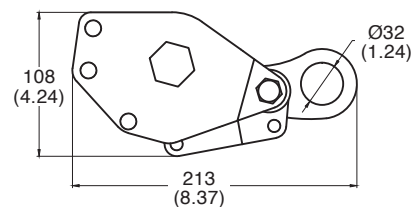



mm (inch)

N-608AL Aluminum Rope Tensioner

Sheet aluminum alloy
Rope Size : 16 mm (5 / 8 ")
Net weight : 37.4 oz. / 1.06 kg

Anodized

New

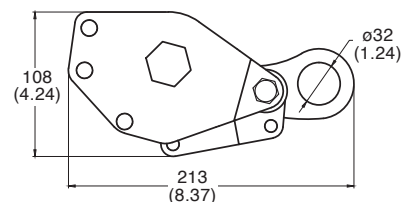

mm (inch)



N-86050 Removable Concrete Anchor

Stainless Steel

Hole Diameter : 20 mm

Min. Breaking load : 5000 lbs / 23 kN

Meets :


● ANSI Z359.18-2017

Net weight : 10.3 oz. / 291 g

PATENT PENDING

Polished

New



mm (inch)

N-800 Beam Anchor

Forged aluminum alloy

For Beam : 101.6-330.2 mm (4"-13")

Min. Breaking load : 5000 lbs / 23 kN

Meets :


● ANSI Z359.18-2017

Net weight : 71.6 oz. / 2.03 kg

PATENT PENDING

Anodized

New

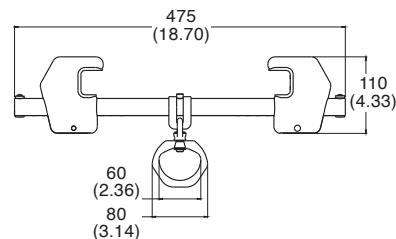

mm (inch)

N-5077 Wood Truss/Attic anchor


Sheet steel

Min. Breaking load : 3000 lbs / 13 kN

Net weight : 11.8 / 335 g

Zinc Plated

New




mm (inch)

N-908 Roof Ring Anchor

Steel, heat treated

Net weight : 34.71 oz. / 984 g

Zinc Plated

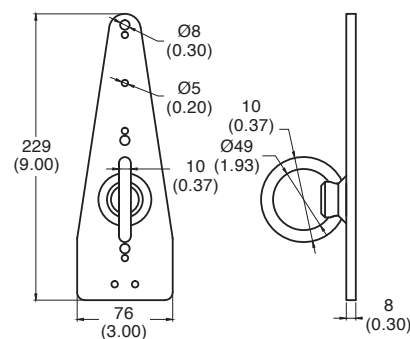

mm (inch)

N-8232050B Steel Swivel Anchor Base 5K

Forged steel, heat treated

Min. Breaking load : 5,000 lbs/22.3 kN


Meets :

- ANSI Z359.18-2017

Net weight : 7.9 oz. / 225 g

Yellow zinc

New



mm (inch)

N-8232100B Steel Swivel Anchor Base 10K

Forged steel, heat treated

Min. Breaking load : 10,000 lbs / 44.5 kN



Meets :

- ANSI Z359.18-2017

Net weight : 28.4 oz. / 804 g

Yellow zinc

New

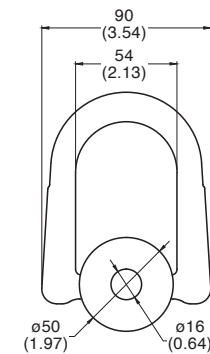

mm (inch)

N-8232050A Steel Swivel Anchor w/ Bolt 5K

Forged steel, heat treated

Min. Breaking load : 5,000 lbs / 22.3 kN


Meets :

- ANSI Z359.18-2017

Net weight : 12.2 oz. / 346 g

Yellow zinc

New

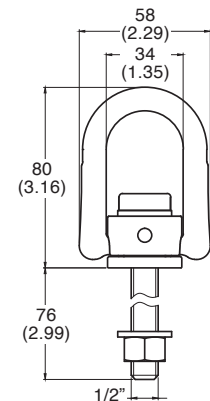

mm (inch)

N-8232100A Steel Swivel Anchor w/ Bolt 10K

Forged steel, heat treated

Min. Breaking load : 10,000 lbs / 44.5 kN


Meets :

- ANSI Z359.18-2017

Net weight : 36.3 oz. / 1.03 kg

Yellow zinc

New

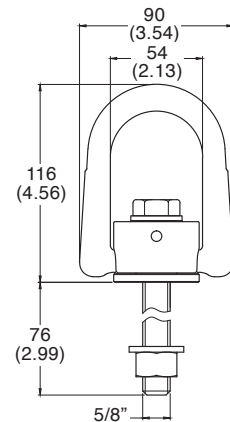

mm (inch)

N-8232050W Steel Swivel Anchor & Puck Assembly 5K


Forged steel, heat treated

Min. Breaking load : 5,000 lbs / 22.3 kN

Meets :

- ANSI Z359.18-2017

Net weight : 43.0 oz. / 1.22 kg

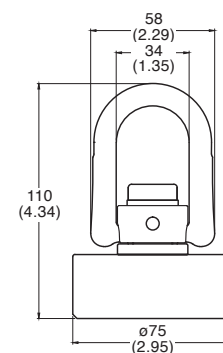

mm (inch)

Yellow zinc

New

N-8232100W Steel Swivel Anchor & Puck Assembly 10K


Forged steel, heat treated

Min. Breaking load : 10,000lbs / 44.5 kN

Meets :

- ANSI Z359.18-2017

Net weight : 65.3 oz. / 1.85 kg

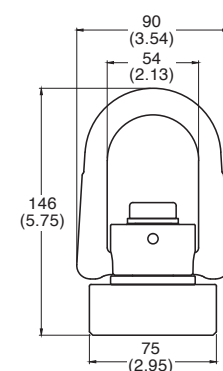

mm (inch)



Yellow zinc

New

Puck & Bolt

Steel

Part no.	N-8232050WA N-8232100WA	
Hole Diameter (A)	1/2"	5/8"
Net weight	33.4 oz./946 g	32.8 oz./930 g



mm (inch)



Yellow zinc

New

N-8232100TB Back Plate

Sheet steel

Net weight : 26.6 oz. / 755 g

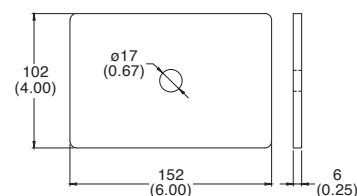

mm (inch)

Yellow zinc

New

N-903

Anchorage Connector (1 / 2")


Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

for 1 / 2 : (M13) bolt.

Net weight : 21.2 oz. / 600 g

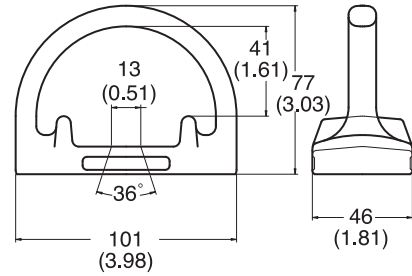

Zinc Plated

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

mm (inch)

N-904

Anchorage Connector (5 / 8")


Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

for 5 / 8 : (M16) bolt.

Net weight : 21.3 oz. / 582 g

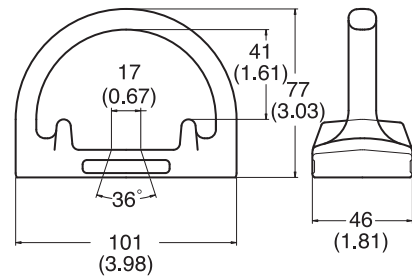

Zinc Plated

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

mm (inch)

N-905

Anchorage Connector (3 / 4")


Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

for 3 / 4 : (M19) bolt.

Net weight : 19.6 oz. / 563 g

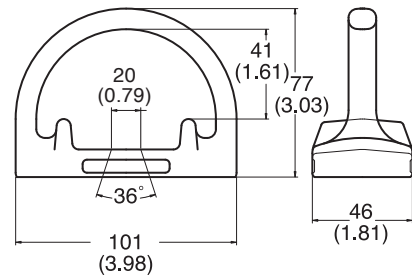

Zinc Plated

"Warning: Bolts for anchorage connector installation to be minimum grade 8 quality with lock washer."

mm (inch)

N-907

Anchorage Connector


Completed with grade 8 nut & lock washer

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 21.3 oz. / 604 g

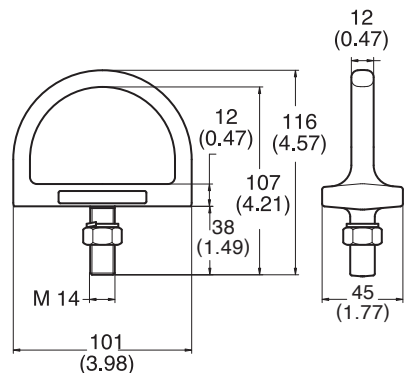


Zinc Plated

mm (inch)

N-481
N-481R
Roof Anchor-reusable

Net weight : 39.1 oz. / 1108 g

Art. No.	Color
N-481	Zinc plated
N-481R	Red Powder Coated




mm (inch)

N-485
Swivel Roof Anchor Bracket

Net weight : 39.2 oz. / 1120 g

Patent Pending

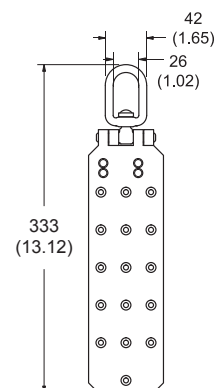


mm (inch)

Zinc Plated

N-5072R
Roof Anchor Bracket

Net weight : 39.5 oz. / 1120 g


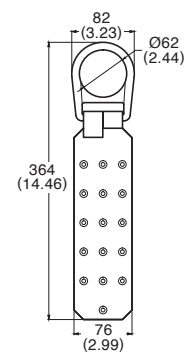


mm (inch)

Red Powder Coated

N-5072F
Roof Anchor Bracket

Net weight : 39.5 oz. / 1120 g

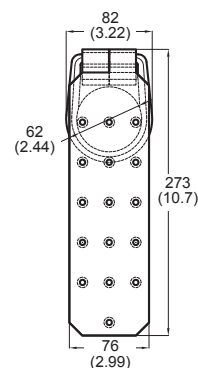

For Flat Surface

mm (inch)

Zinc Plated

N-480 Roof Anchor-disposable


Net weight : 12.6 oz. / 357 g



Zinc Plated

N-4805 Roof Anchor

Net weight : 12.5 oz. / 335 g



Zinc Plated



For Flat Surface

N-350 / N-3501 / N-3502 Anchorage Connector

Stainless steel, SUS 304

Min. Breaking load : 5000 lbs / 23 kN

Net weight : 12.9 oz. / 366 g





Polished

mm (inch)

N-459 Steel Plate

Net weight : 9.5 oz. / 271 g

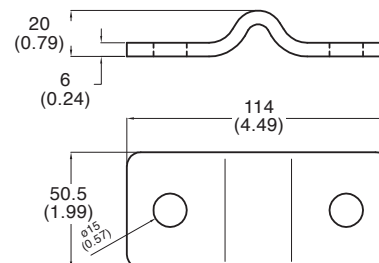

Zinc Plated

mm (inch)

N-351
**Swivels - Eye to Eye
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.2 oz. / 176 g


N-3035M
Swivel Eye

Forged steel, heat treated
Net weight : 2.5 oz. / 72 g

Zinc Plated



N-3035M

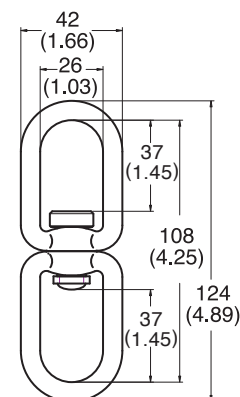


mm (inch)

N-352
**Swivels - Jaw to Jaw
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.3 oz. / 180 g

Zinc Plated




mm (inch)

N-353
**Swivels - Jaw to Eye
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 6.2 oz. / 175 g

Zinc Plated

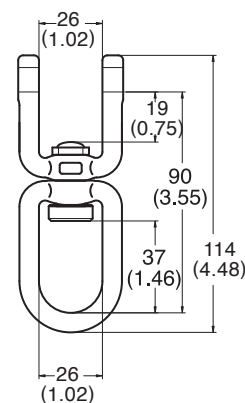


mm (inch)

N-354
**Swivels - Eye to Eye
(non-indicator)**

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Net weight : 7.1 oz. / 200 g

Zinc Plated

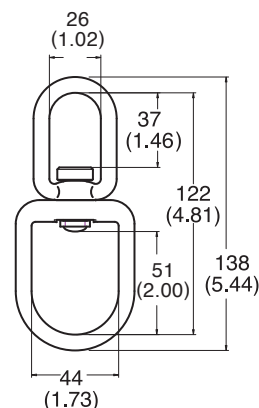

mm (inch)

N-355

Indicator Swivels - Eye to Eye


Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Net weight : 7.4 oz. / 211 g

Zinc Plated



Indicator
activation

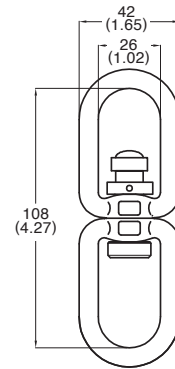

mm (inch)

N-356

Indicator Swivels - Jaw to Jaw

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Net weight : 6.7 oz. / 190 g

Zinc Plated



Indicator
activation



mm (inch)

N-357

Indicator Swivels - Jaw to Eye

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Net weight : 6.5 oz. / 185 g

Zinc Plated



Indicator
activation

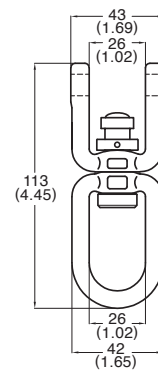

mm (inch)

N-358

Indicator Swivels - Eye to Eye

Forged steel, heat treated

100% proof loaded to 3600 lbs / 16 kN


Min. Breaking load : 5000 lbs / 23 kN

Net weight : 7.4 oz. / 210 g

Zinc Plated



Indicator
activation

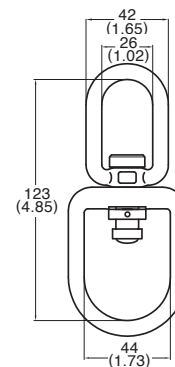

mm (inch)


N-5372

Rescue Hauler Pulley-2 way

Auto Locking

Stamping aluminum alloy
 Rope size : 11 mm
 Working load limit : 250 kg
 Net weight : 55.6 oz. / 1588 g

Anodized

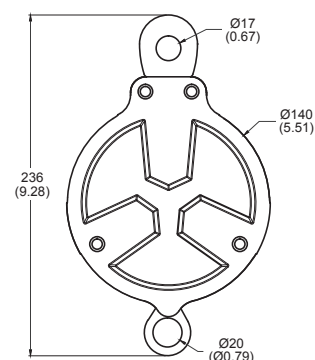


mm (inch)

N-5331

Big Mobile Double Pulley

Stamping aluminum alloy
 Rope size : Maximum to 13 mm
 Min. Breaking load : 50 kN
 Net weight : 18.9 oz. / 539g

Anodized

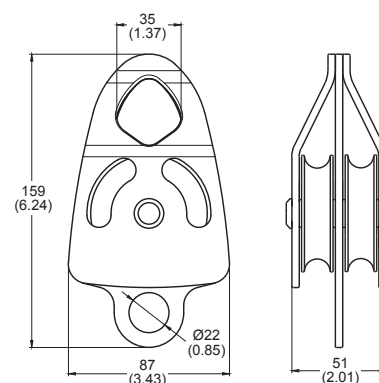


mm (inch)

N-5331B

Big Mobile Double Pulley

With Ball Bearing
 With Stainless Sheave
 Stamping aluminum alloy
 Rope size : Maximum to 13 mm
 Min. Breaking load : 50 kN
 Net weight : 29.4 oz. / 834 g


Anodized

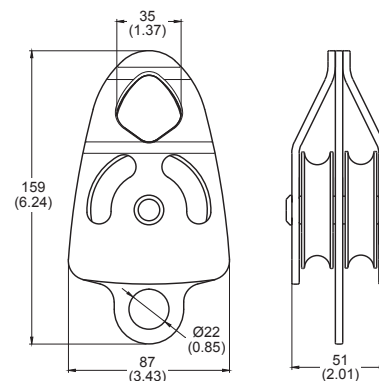

mm (inch)

N-6901 Cable Glider

Stainless Steel
Net weight : 8.5 oz. / 241 g


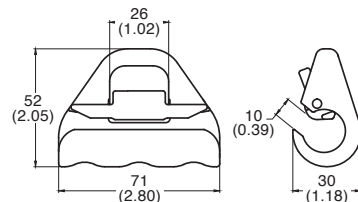


Polished

mm (inch)

N-5340 Tyrolean Pulleys

Stamping aluminum alloy
Rope size : Maximum to 13 mm
Min. Breaking load : 24 kN
Net weight : 8.6 oz. / 245 g





Anodized

mm (inch)

N-5340B Tyrolean Pulleys

With Ball Bearing
With Stainless Sheave
Stamping aluminum alloy
Rope size : Maximum to 13 mm
Min. Breaking load : 24 kN
Net weight : 12.63 oz. / 358 g




Anodized

mm (inch)

N-5320 Fixed Pulley

Stamping aluminum alloy
Rope size : Maximum to 12 mm
Min. breaking load : 20 kN
Net weight : 3.1 oz. / 88 g




Anodized

mm (inch)

N-5322 Mobile Pulley

Stamping aluminum alloy
Rope size : Maximum to 12 mm
Min. breaking load : 20 kN
Net weight : 4.1 oz. / 117 g




Anodized

mm (inch)

N-5330 Mobile Pulley

Stamping aluminum alloy
Rope size : Maximum to 16 mm
Min. breaking load : 30 kN
Net weight : 9.6 oz. / 272 g




Anodized

mm (inch)

N-5332 Mobile Double Pulley

Stamping aluminum alloy
Rope size : Maximum to 16 mm
Min. breaking load : 30 kN
Net weight : 16.8 oz. / 476 g

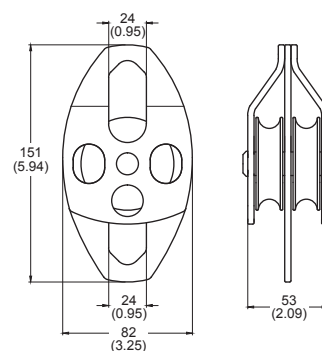

Anodized

mm (inch)

N-5300


Handled Ascender - Right Hand

Stamping aluminum alloy

Rope size : 9 mm to 12mm

● Meets : EN 567

Net weight : 6.9 oz. / 196 g

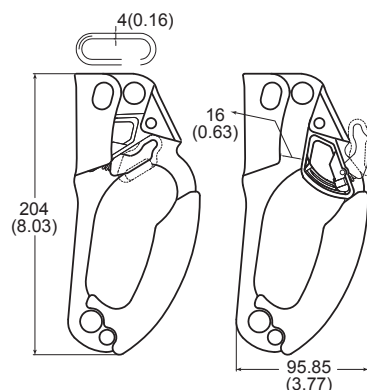

mm (inch)

Anodized

N-5302


Handled Ascender - Left Hand

Stamping aluminum alloy

Rope size : 9 mm to 12mm

● Meets : EN 567

Net weight : 6.9 oz. / 196 g

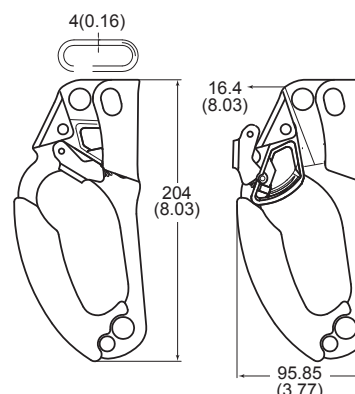

mm (inch)

Anodized

N-5306


Chest Ascender

Stamping aluminum alloy

Rope size : 9 mm to 12mm

● Meets : EN 567

Net weight : 5.8 oz. / 165 g

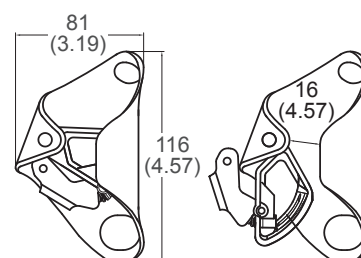

mm (inch)

Anodized

N-5350

Swivel

Forged aluminum alloy

Min. breaking load : 6000 lbs / 30 kN

Net weight : 5.6 oz. / 158 g

N-5350B

Swivel With Ball Bearing


Forged aluminum alloy

Min. Breaking load : 6000 lbs / 30kN

Net weight : 5.7 oz. / 163 g



N-5350B

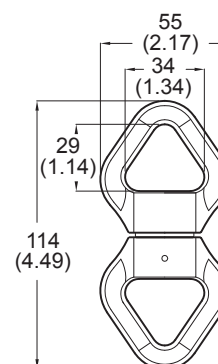


mm (inch)

Anodized

N-5310 Belay Tube

Forged aluminum alloy
Rope size : 8 mm to 11 mm
Net weight : 2.0 oz. / 58 g

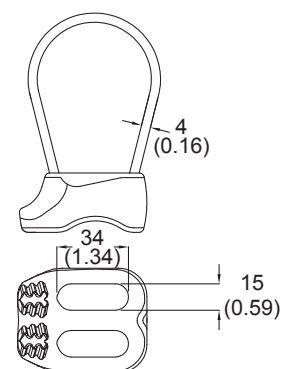


Anodized

mm (inch)

N-5312 Belay Tube

Forged aluminum alloy
Rope size : 8 mm to 11 mm
Net weight : 1.9 oz. / 53 g

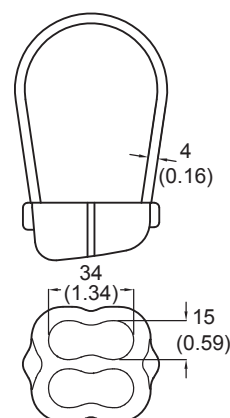


Anodized

mm (inch)

N-2301-CP Aluminum Carabiner

Aluminum alloy
Min. Breaking load : 1800lbs / 8kN
Net weight : 1.02 oz. / 24 g




Anodized

mm (inch)

N-220 Forged Accessory Hook

Aluminum alloy
Min. breaking load : 5kN
Net weight : 0.7 oz. / 20 g




Anodized

mm (inch)

N-5380
Rigging Plate

Forged aluminum alloy
Min. breaking load : 35 kN
Net weight : 2.3 oz. / 65 g

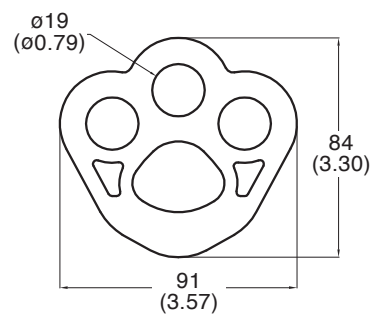


Anodized

mm (inch)

N-5381
Rigging Plate

Forged aluminum alloy
Min. breaking load : 35 kN
Net weight : 7.7 oz. / 220 g

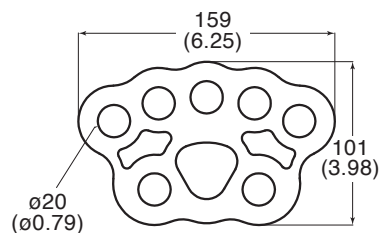


Anodized

mm (inch)

N-5382
Rigging Plate

Forged aluminum alloy
Min. breaking load : 45 kN
Net weight : 16.1 oz. / 460 g

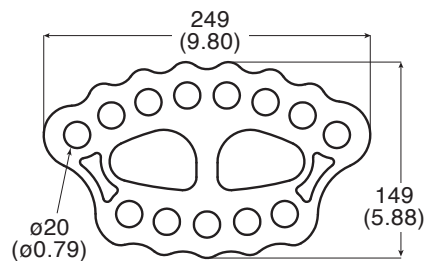

Anodized

mm (inch)

N-505


Figure 8 Descender

Forged aluminum alloy

For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)

Min. Breaking load : 7500 lbs / 35 kN

Net weight : 4.1 oz. / 116 g

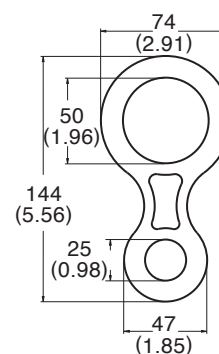

Anodized

mm (inch)

N-5052


Figure 8 Descender

Forged aluminum alloy

For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)

Min. Breaking load : 5500 lbs / 25 kN

Net weight : 3.5 oz. / 100 g



Anodized

mm (inch)

N-506


Big Figure 8 Descender

Forged aluminum alloy

For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)

Min. breaking load : 9000 lbs / 40 kN

Net weight : 9.5 oz. / 270 g

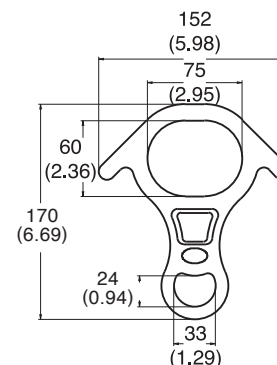

Anodized

mm (inch)

N-4506


Big Figure 8 Descender

Steel

For Rope : 3 / 8 " - 5 / 8 " (9 - 16 mm)

Min. breaking load : 11000 lbs / 50 kN

Net weight : 24.2 oz. / 691 g




Zinc Plated

mm (inch)

S-7786-16

Rigging Screw Jaw and Stud

Stainless steel, SUS 316
For wire rope : 8mm (5 / 16")
Net weight : 32.0 oz. / 908 g

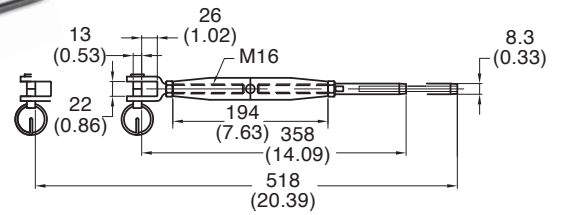


Polished

mm (inch)

S-7789-16

Rigging Screw Stud and Stud

Stainless steel, SUS 316
For wire rope : 8mm (5 / 16")
Net weight : 30.0 oz. / 850 g

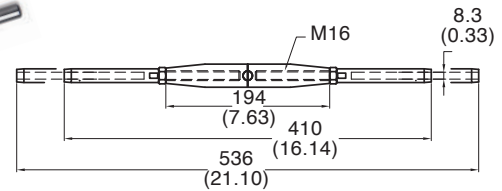


Polished

mm (inch)

S-7801-16

Swage Stud (right thread)

Stainless steel, SUS 316
For wire rope : 8mm (5 / 16")
Net weight : 9.0 oz. / 256 g

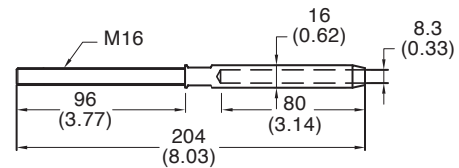


Polished

mm (inch)

S-7802-08

Eye Swage Stud

Stainless steel, SUS 316
For wire rope : 8mm (5 / 16")
Net weight : 3.4 oz. / 95 g

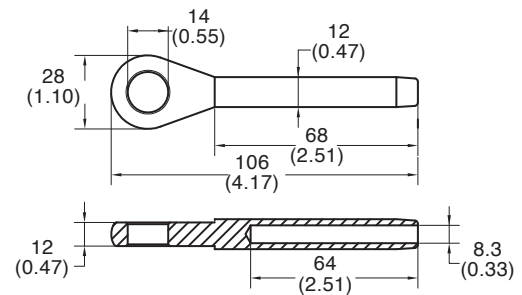


Polished

mm (inch)

S-7805-08

Jaw Swage Stud

Stainless steel, SUS 316
For wire rope : 8mm (5 / 16")
Net weight : 7.9 oz. / 223 g

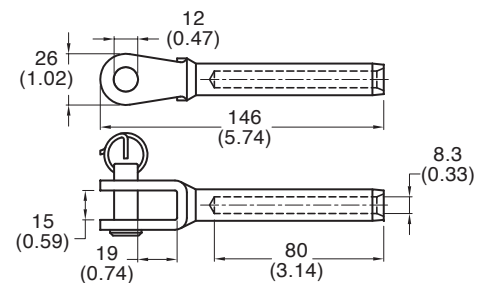

Polished


mm (inch)

N-704

Plastic shoulder pad

Colored : Black

Net weight : 1.8 oz. / 51 g

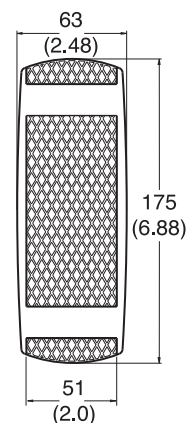


mm (inch)

N-703

Plastic Back pad

Net weight : 2.9 oz. / 83 g

Art. No.	Color
N-703.black	Black
N-703.red	Red
N-703.blue	Blue
N-703.yellow	Yellow
N-703.trans	Transparent

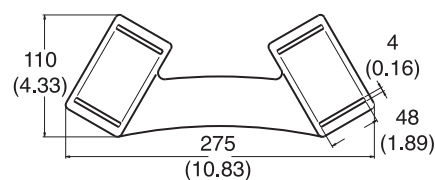


mm (inch)

N-701

Plastic Back pad

Net weight : 1.5 oz. / 44 g

Art. No.	Color
N-701.black	Black
N-701.red	Red
N-701.blue	Blue
N-701.yellow	Yellow

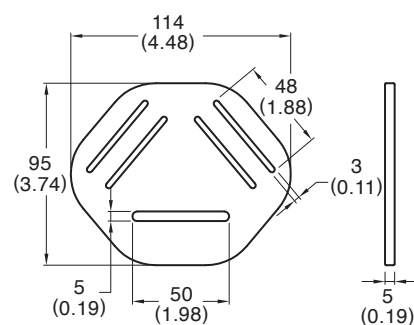


mm (inch)

N-Roller01 / N-Roller02 / N-Roller03 / N-Roller04 / N-Roller05 / N-Roller06 / N-Roller07

Plastic Roller


Art No.	A. Inner Dimension (Ø)	B. Overall Length (mm)
N-Roller01	10	25
N-Roller02	10	51
N-Roller03	12	42
N-Roller04	12	51
N-Roller05	12	65
N-Roller06	12	75
N-Roller07	15	49



N-710
Plastic Back pad

Net weight : 0.80 oz. / 22 g


Art. No.	Color
N-710.black	Black
N-710.red	Red
N-710.blue	Blue
N-710.yellow	Yellow

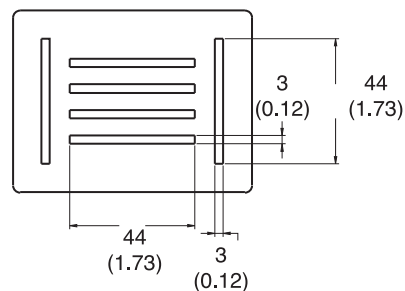

mm (inch)

N-705
Plastic Pad Black

Net weight : 0.4 oz. / 10 g




mm (inch)

N-706
Plastic Keeper

Net weight : 0.3 oz. / 9 g

Art. No.	Color
N-706.black	Black
N-706.red	Red
N-706.blue	Blue
N-706.yellow	Yellow




mm (inch)

N-707
Plastic Back pad

Net weight : 0.1 oz. / 3.5 g

Art. No.	Color
N-707.black	Black
N-707.red	Red
N-707.blue	Blue
N-707.yellow	Yellow




mm (inch)


N-410
Plastic Thimble

Net weight : 0.2 oz. / 7 g

Art. No.	Color
N-410.white	White
N-410.red	Red
N-410.blue	Blue
N-410.black	Black

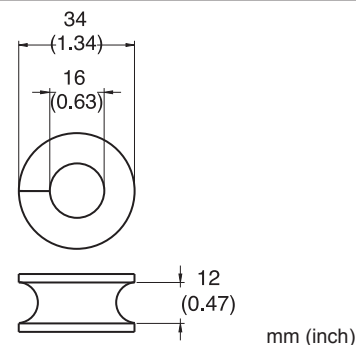

N-4101
Brass Thimble

Net weight : 0.21 oz. / 6 g

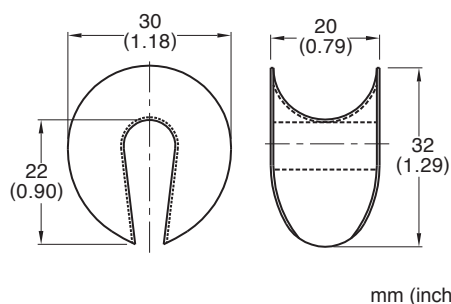
N-708
Plastic Protector Sleeve


Net weight : 0.5 oz. / 15 g

Art. No.	Color
N-708.black	Black
N-708.red	Red
N-708.blue	Blue
N-708.yellow	Yellow

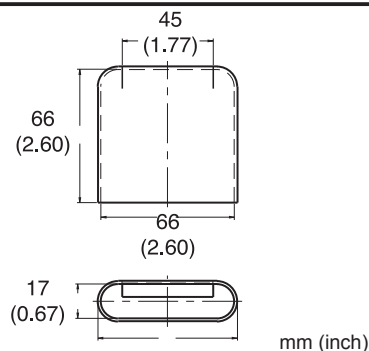

N-709
Plastic Protector Sleeve

Net weight : 0.56 oz. / 16 g

Art. No.	Color
N-709.black	Black
N-709.red	Red
N-709.blue	Blue
N-709.yellow	Yellow

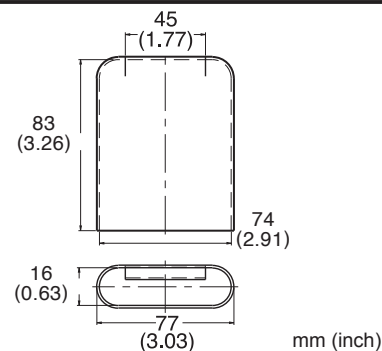

N-482
Double Lockout Jaw

Net weight : 4.1 oz. / 117 g

Red Painted.


N-252GM-CP
Geomet Carabiner
3600 LBS gate strength


Steel Carabiner
 Alloy steel, heat treated
 100% proof loaded to 3600 lbs / 16kN
 Min. Breaking load : 5000 lbs / 23 Kn
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● EN 362 : 2004
 Net weight : 8.96 oz. / 254 g
Geomet



mm (inch)

N-248GL
Lifting Carabiner

Alloy steel, heat treated
 Net weight : 10.7 oz. / 303 g.
 Working Load Limit 2500 lbs
 Safety Factor 4 : 1
 For Material Handling



mm (inch)


Zinc Plated

N-483-ZN
O Ring

Forged steel, heat treated
 100% proof loaded to 3600 lbs / 16 kN
 Min. Breaking load : 5000 lbs / 23 kN
 Meets :
 ● ANSI Z359.12-2019
 ● CSA Z259.12-16
 ● Net weight : 5.2 oz. / 148 g



500 Hours Salt Spray




mm (inch)

Zinc Nickel

7350-08
Quick Link

Steel
 Net weight : 2.82 oz. / 80g




mm (inch)

Zinc Plated

7355-08
Delta Link

Steel
Net weight : 3 oz. / 85g




Zinc Plated

mm (inch)

N-980
Anchor Point

Material	Art No.	Net Weight	Ø
Steel	N-980-10	1.9 oz./55 g	10
	N-980-12	2.0 oz./58 g	12
Stainless Steel	N-980-S-10	1.8 oz./50 g	10
	N-980-S-12	1.9 oz./53 g	12

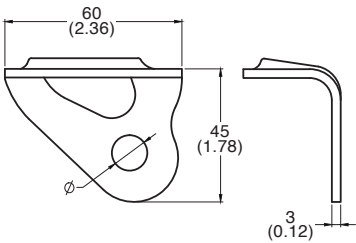

Anodized

mm (inch)



A. Revolutionary Solution For Safety Inspection

YOKE's unique design of proprietary wafer-antenna chip construction, enables Smart Phone NFC and RFID inspection management to be more intuitive and efficient.


B. Benefits of Hardware Integrated RFID

- RFID chip INTEGRATED onto hardware
- Non-removable
- Easily Identifiable and Readable
- Product Traceability
- Every products has unique ID number
- By using RFID chip with a third-party asset management application to achieve product traceability, manufacturer authentication and digitised product information

C. RFID Tag Information

- Material: Nylon
- Size: 6mm
- Frequency: HF-13.56MHz $\pm 3\%$
- Read Range: 8mm, depends on Reader type
- Standard : ISO 15693


D. Supports Multiple Reader Platforms

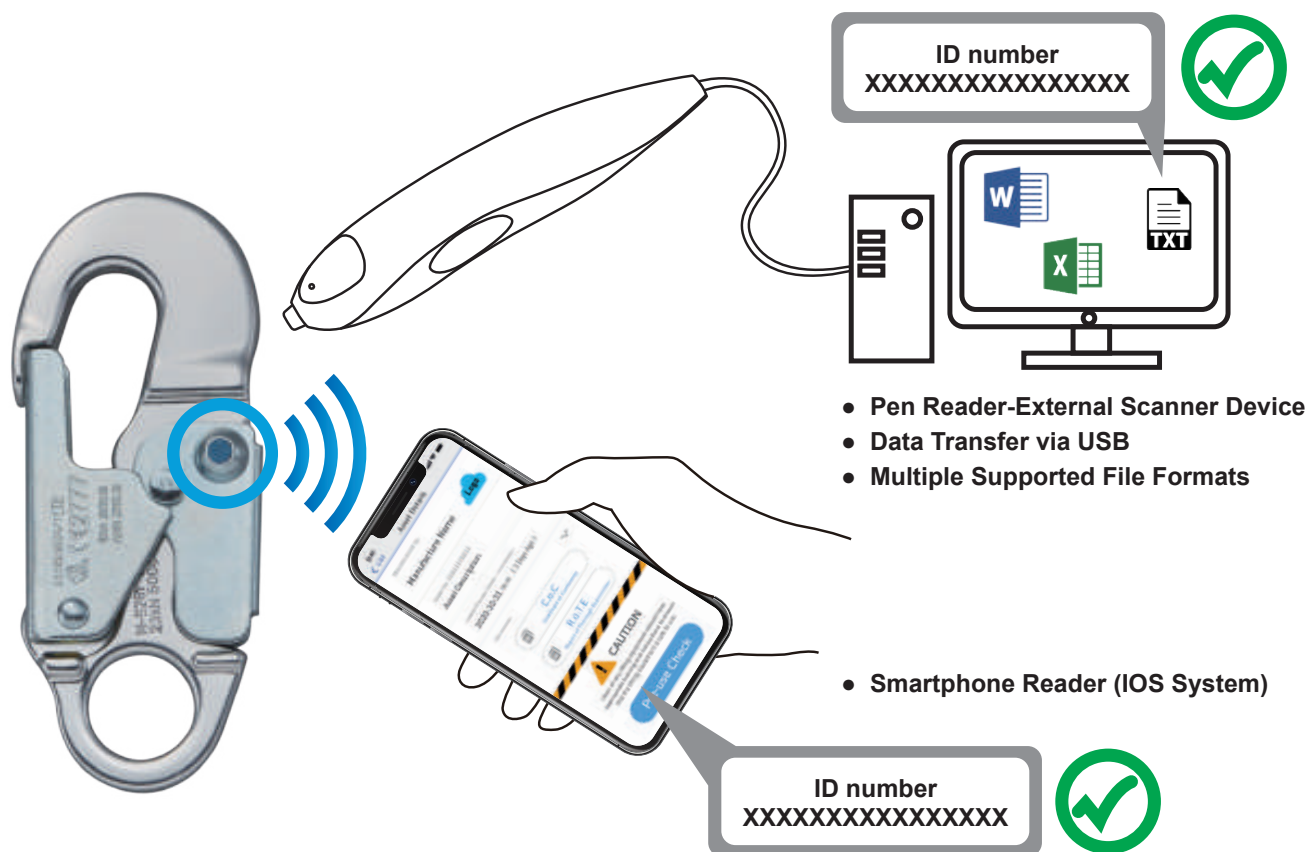

N-3610-Ri Rope Snap Hook 3600 LBS gate strength

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
● EN 362 : 2004
Net weight : 13.6 oz. / 388 g
Zinc Plated

New

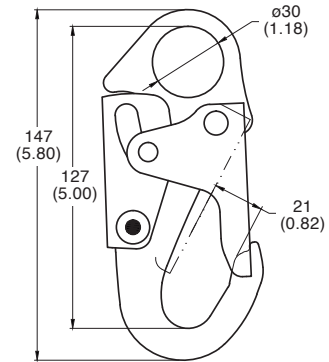


mm (inch)

N-3615-Ri Indicator Swivel Hook 3600 LBS gate strength

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
● EN 362 : 2004
Net weight : 17.5 oz. / 501 g
Indicator Strength Options: ① 500 lbs ② 750 lbs
Zinc Plated

New

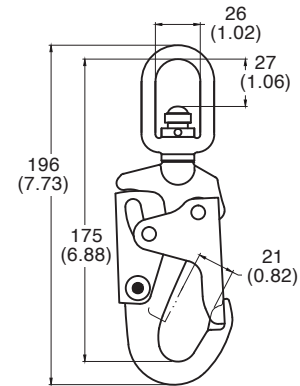


mm (inch)

N-3630T-Ri Rebar Hook 3600 LBS gate / Transverse Load

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019
● CSA Z259.12-16
● EN 362 : 2004
Net weight : 28.5 oz. / 800 g
Zinc Plated

New

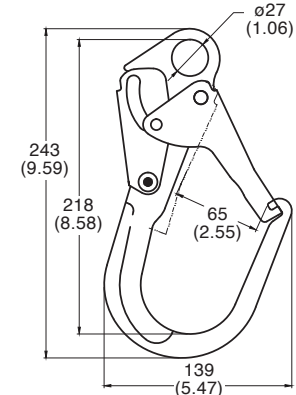


mm (inch)

N-314-Ri Rebar Hook

Designed for 2" or small rebar
Forged steel, heat treated
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● EN 362 : 2004
Net weight : 17.6 oz. / 500 g
Zinc Plated

New

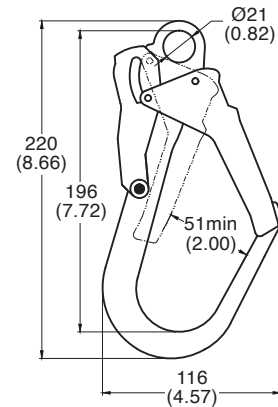

mm (inch)

N-5261-Ri Aluminum Snap Hook 3600 LBS gate strength


Forged aluminum alloy
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 8.7 oz. / 247 g

Anodized

New

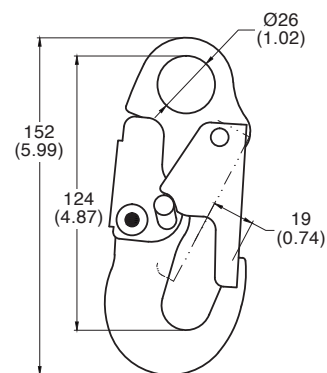

mm (inch)

N-5271T-Ri Aluminum Rebar Hook 3600 LBS gate/Transverse Load


Forged aluminum alloy
100% proof loaded to 3600 lbs / 16kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :

- ANSI Z359.12-2019
- CSA Z259.12-16
- EN 362 : 2004

Net weight : 22.3 oz. / 637 g

Anodized

New

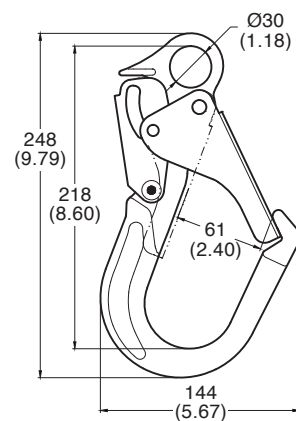

mm (inch)

N-50130-Ri Aluminum Rebar Hook


Forged aluminum alloy
Min. Breaking load : 5000 lbs / 23 kN
Meets :

- EN 362 : 2004

Net weight : 16.8 oz. / 480 g

Anodized

New

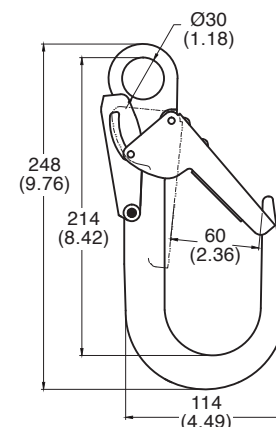

mm (inch)

N-415-Ri Stamped D-Ring


Stainless steel, SUS 304
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :

- ANSI Z359.12-2019

Net weight : 5.0 oz. / 142 g

Polished

New

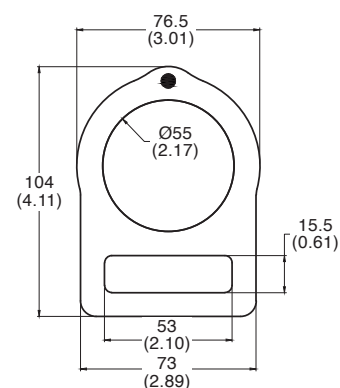

mm (inch)


N-416L-Ri D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019

Net weight : 4.2 oz. / 120 g

Zinc Plated

New

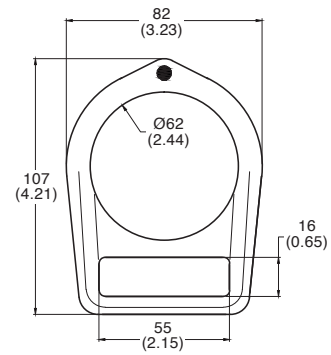

mm (inch)


N-416-Ri D-Ring

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019

Net weight : 5.0 oz. / 142 g

Zinc Plated

New

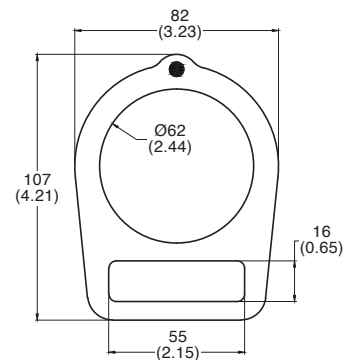

mm (inch)


N-529-Ri Aluminum Bent D-Ring

Forged aluminum alloy
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019

Net weight : 2.8 oz. / 78 g

Anodized

New

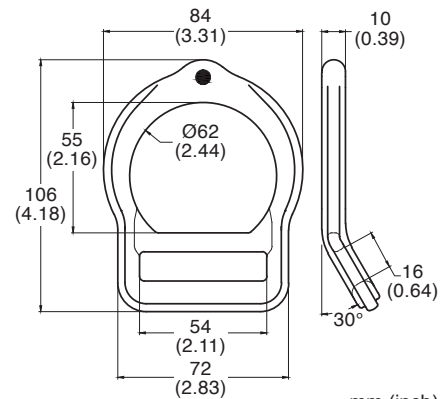

mm (inch)


N-528-Ri Aluminum D-Ring

Forged aluminum alloy
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
Meets :
● ANSI Z359.12-2019

Net weight : 2.6 oz. / 75 g

Anodized

New

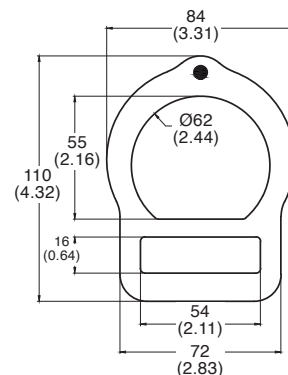

mm (inch)

This image shows a full page of blank, lined paper. It features approximately 28 horizontal blue or grey lines spaced evenly apart, typical of notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings on the page.

[illegible]

INDEX

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
N-220	127	N-3040-1	13	N-402	32	N-429	33	N-500	62	N-5350	126	N-706	132
N-2301-CP	127	N-3041	13	N-402-S	77	N-430	29	N-501	62	N-5350B	126	N-707	132
N-244-0-S	80	N-3049	14	N-4021L	30	N-430-S	76	N-501110	62	N-5372	123	N-708	133
N-244G	84	N-3056	12	N-402W	32	N-431	29	N-501110X	63	N-5380	128	N-709	133
N-245G	86	N-3058	13	N-403	27	N-431-S	78	N-50130	62	N-5381	128	N-710	132
N-246G	87	N-3059	13	N-403L	27	N-432	29	N-50130-Ri	139	N-5382	128	N-800	115
N-247G-CP	89	N-306	10	N-403XL	27	N-432A-S	77	N-5015	63	N-540	66	N-8232050A	116
N-248G	88	N-314-MX	17	N-403-S	77	N-432-S	77	N-5015/0	63	N-5407	68	N-8232050B	116
N-248GL	134	N-314-Ri	138	N-404	32	N-433	42	N-5018	63	N-5407B	68	N-8232050W	117
N-250G	84	N-315	10	N-404R	32	N-433L	42	N-5019	68	N-5416	66	N-8232100A	116
N-250GK	84	N-3155	14	N-405	29	N-434	38	N-502	61	N-5439	71	N-8232100B	116
N-251G	86	N-315X	10	N-4052	30	N-435	39	N-5020	68	N-5719	69	N-8232100TB	117
N-252-S	80	N-3161	14	N-4053	25	N-4335	47	N-503	64	N-5720	69	N-8232100W	117
N-252G	85	N-3167	11	N-406	33	N-436	41	N-5032	64	N-5721	69	N-86050	115
N-252GK	85	N-3167 / 0	11	N-407	31	N-437	24	N-5035	64	N-5722	69	N-903	118
N-252GM-CP	134	N-325 / 0	17	N-407L	30	N-438	48	N-5035 / 0	64	N-5740	70	N-904	118
N-254G	87	N-326	17	N-407R	31	N-439	49	N-504	61	N-5741	70	N-904-S	76
N-256G	85	N-331	61	N-408	31	N-439X	49	N-505	129	N-5742	70	N-905	118
N-258G-CP	89	N-339	61	N-408R	31	N-440	49	N-5052	129	N-5748	70	N-907	118
N-259G-CP	90	N-350	120	N-409	21	N-441	49	N-506	129	N-5860	75	N-908	115
N-261G	88	N-3501	120	N-410	133	N-442	36	N-507	67	N-5861	75	N-980	135
N-2615G	88	N-3502	120	N-4101	133	N-443	44	N-5072F	119	N-5862	75	N-DE001	52
N-263G-CP	89	N-351	121	N-411	46	N-445	28	N-5072R	119	N-5867	76	N-DE002	52
N-265G-CP	90	N-352	121	N-412	44	N-445L	28	N-5077	115	N-5868	73	N-DE005	55
N-267G	87	N-353	121	N-413	41	N-448	43	N-508	71	N-5868T	73	N-DE006	55
N-268G	86	N-354	121	N-4135	41	N-448-S	79	N-509	71	N-5869	74	N-DE007	54
N-268G-S	80	N-355	122	N-413X	41	N-449	33	N-511	71	N-5869-DA	74	N-DE008	54
N-270	96	N-356	122	N-414	21	N-4501	39	N-512	67	N-5869T	73	N-DE009	54
N-271	93	N-357	122	N-414-S	78	N-4502	40	N-51428	72	N-5870A	74	N-DE244-0	51
N-272	95	N-358	122	N-414R	21	N-4506	129	N-51445	72	N-5871	74	N-DE300	51
N-273	96	N-3591-S	76	N-414X	21	N-451	40	N-51460	72	N-5877	73	N-DE301	51
N-274	95	N-360	18	N-415	22	N-452	42	N-518	66	N-602	110	N-DE360	51
N-275	96	N-3610	7	N-415-S	78	N-452L	42	N-519	66	N-602-12	110	N-DE403	52
N-2750	98	N-3610-S	81	N-415R	22	N-453	34	N-5203	67	N-604	111	N-DE403B	52
N-276	95	N-3610-Ri	138	N-415X	22	N-455	24	N-5204	67	N-606AP	110	N-DE415	53
N-277	97	N-3615	8	N-415-Ri	139	N-459	120	N-5212	72	N-608	113	N-DE415B	53
N-278	97	N-3615-S	81	N-416	20	N-460	25	N-5246	60	N-608AL	113	N-DE420	56
N-281	93	N-3615-Ri	138	N-416-Ri	140	N-461	25	N-5248	60	N-610	107	N-DE4207	56
N-2817	30	N-3616	8	N-416L	20	N-469	25	N-5261	59	N-610LY	107	N-DE422	56
N-282	94	N-3616-S	81	N-416L-R	20	N-475	33	N-5261-Ri	139	N-616	108	N-DE448	56
N-283	94	N-3617	8	N-416L-Ri	140	N-476	24	N-5265	60	N-617	108	N-DE452	57
N-284	94	N-3618	8	N-416R	20	N-476R	24	N-5265 / 0	60	N-618	109	N-DE460	53
N-2852	98	N-3620T	16	N-417	23	N-477	23	N-5268	59	N-619	109	N-DE460B	53
N-2852G	103	N-3625T	16	N-418	22	N-478	26	N-5271T	59	N-619T	109	N-DE483	54
N-2853G	103	N-3625T/0	16	N-419	23	N-479	48	N-5271T-Ri	139	N-620	111	N-DE518	55
N-2854	98	N-3630T	15	N-419R	23	N-4793	48	N-5275T	59	N-621	111	N-DE529	55
N-2854G	103	N-3630TF	15	N-420	38	N-4797	48	N-528	65	N-622	111	N-RCT27337	9
N-2855	99	N-3633T	15	N-420-S	78	N-480	120	N-528A	65	N-623	111	N-Roller01	131
N-2855G	104	N-3633T/0	16	N-4201	38	N-4805	120	N-528-Ri	140	N-630	107	N-Roller02	131
N-2857	99	N-3630T-Ri	138	N-4203	39	N-481	119	N-529	65	N-630LY	107	N-Roller03	131
N-2857G	104	N-3658	9	N-4206	38	N-481R	119	N-529A	65	N-636	108	N-Roller04	131
N-2857 / 0	99	N-3660	9	N-4207	40	N-482	133	N-529-Ri	140	N-637	108	N-Roller05	131
N-2857 / 0G	104	N-3680	17	N-421	39	N-483	34	N-5300	126	N-638	109	N-Roller06	131
N-2859	100	N-3710	7	N-421-S	79	N-483-ZN	134	N-5302	126	N-639	110	N-Roller07	131
N-2859G	105	N-3810	7	N-422	35	N-485	119	N-5306	126	N-650	112	Puck & Bolt	117
N-2868G	105	N-3810X	7	N-422-S	79	N-486	34	N-5310	127	N-650B	112	S-7786-16	130
N-2817	30	N-3830T	15	N-4224	35	N-487	34	N-5312	127	N-651	112	S-7789-16	130
N-287	97	N-400	46	N-4226	35	N-489	35	N-5320	125	N-651B	112	S-7801-16	130
N-3032	10	N-400 / S	46	N-423	43	N-4910	44	N-5322	125	N-660	113	S-7802-08	130
N-3033	12	N-4001	46	N-423-S	79	N-4911	44	N-533	72	N-668	111	S-7805-08	130
N-3035	11	N-401	36	N-4237	43	N-492	26	N-5330	125	N-670	113	7350-08	134
N-3035 / 0	11	N-4011	36	N-424	43	N-492-BT	27	N-5331	123	N-6901	124	7355-08	135
N-3035M	121	N-4012	36	N-425	47	N-493	26	N-5331B	123	N-701	131		
N-3036	14	N-4013	37	N-426	47	N-493-BT	26	N-5332	125	N-703	131		
N-3039	12	N-4014	37	N-427	47	N-4940-BZP	45	N-5340	124	N-704	131		
N-3040	12	N-4016	37	N-428	37	N-4941	45	N-5340B	124	N-705	132		



YOKE INDUSTRIAL CORP.

#39, 33rd Road, Taichung Industrial Park,

Taichung 407, TAIWAN

Tel : +886-4-2350-8088

Fax : +886-4-2350-1001

E-mail : info@mail.yoke.net

[http : // www.yoke.net](http://www.yoke.net)

An ISO 9001 Certified Company

